

DRAFT

	One Socket Protocol ICD <div style="border: 2px solid red; padding: 5px; display: inline-block; margin: 10px 0;">This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control.</div> Revision 5.6 11/24/2009
---	--

One Socket Protocol (OSP) Interface Control Document

Revision 5.6
Nov 24, 2009

This document contains confidential and proprietary information belonging to SiRF Technology, Inc. Public disclosure of this information is strictly prohibited and governed by the terms and conditions of one or more non-disclosure agreements.

Copyright © 2009 SiRF Technology, Inc. All rights reserved. This document contains information regarding technology that is protected under one or more pending United States and foreign patents. SiRF®, SiRFStar® and the SiRF name plus orbit design logo are registered trademarks of SiRF Technology, Inc.

The information in this document may be incomplete, may be inadequate for the user's purposes, or may contain errors, and the user assumes all risk related to the use of the material in this document. SiRF Technology, Inc. does not in any way warranty the information in this document and does not guarantee in any way the user's success in implementing the designs herein.

CS-129291-DC2	© SiRF Technology, Inc., a member of the CSR plc group of companies 2009 This material is subject to SiRF's non-disclosure agreement.	Page i of 251
---------------	--	---------------

DRAFT

DRAFT



One Socket Protocol ICD

This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.


Revision 5.6
11/24/2009

TABLE OF CONTENTS

1	Overview	12
2	References	12
3	Message Structure and Transport Mechanism	13
3.1	TRANSPORT MESSAGE	13
3.2	NMEA PROTOCOL SUPPORT	13
3.3	PAYLOAD STRUCTURE	13
4	OSP Message Mappings	14
4.1	ACCESS TO OSP MESSAGES AND THEIR DOCUMENTATION	14
4.2	MAPPING BETWEEN AI3 MESSAGES AND OSP MESSAGES	27
4.3	MAPPING BETWEEN F MESSAGES AND OSP MESSAGES	28
5	Input Message Definitions	30
5.1	POSITION REQUEST	30
5.2	SET IONOSPHERIC MODEL	32
5.3	SET SATELLITE EPHEMERIS AND CLOCK CORRECTIONS	33
5.4	SET ALMANAC ASSIST DATA	38
5.5	SET ACQUISITION ASSISTANCE DATA	40
5.6	SET REAL-TIME INTEGRITY	42
5.7	OSP ACK/NACK/ERROR NOTIFICATION	42
5.8	EPHEMERIS STATUS REQUEST	43
5.9	ALMANAC REQUEST	43
5.10	SET UTC MODEL	44
5.11	SET GPS TOW ASSIST	45
5.12	SET AUXILIARY NAVIGATION MODEL PARAMETERS	45
5.13	BROADCAST EPHEMERIS REQUEST	47
5.14	SESSION OPENING REQUEST	48
5.15	CLIENT STATUS REQUEST	49
5.16	TEST MODE CONFIGURATION REQUEST	49
5.17	TX BLANKING REQUEST	49
5.18	CHANNEL LOAD QUERY	51
5.19	SERIAL PORT SETTING REQUEST	52
5.20	SOFTWARE VERSION REQUEST	54
5.21	REJECT	54
5.22	TIME_FREQUENCY_APPROXIMATE_POSITION STATUS REQUEST	55
5.23	APPROXIMATE MS POSITION RESPONSE	56
5.24	FREQUENCY TRANSFER RESPONSE	57
5.25	TIME TRANSFER RESPONSE	59
5.26	PUSH AIDING AVAILABILITY	61
5.27	HARDWARE CONFIGURATION RESPONSE	62
5.28	SESSION CLOSING REQUEST	64
5.29	OSP REVISION REQUEST	64
5.30	NAV SUBFRAME 1_2_3 AIDING RESPONSE MESSAGE	65
5.31	NAV SUBFRAME 4_5 AIDING RESPONSE MESSAGE	65
5.32	POWER MODE REQUEST	66
5.33	QUERY REQUEST	72
5.34	HARDWARE CONTROL INPUT	73

DRAFT

DRAFT

 <p>SiRF A CSR plc Company</p>	One Socket Protocol ICD <div style="border: 2px solid red; padding: 5px; display: inline-block;">This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control.</div>	Revision 5.6 11/24/2009
---	--	----------------------------

5.35	CW CONFIGURATION	74
5.36	TCXO LEARNING INPUT	74
5.36.1	TCXO Learning Clock Model Output Control.....	75
5.36.2	TCXO Learning Clock Model Data Base Input.....	76
5.36.3	TCXO Learning Temperature Table Input	77
5.36.4	TCXO Learning Test Mode Control	78
5.37	WiFi TAG MESSAGE.....	79
5.37.1	WiFi Tag Notification.....	79
5.38	SENSOR CONTROL INPUT.....	80
5.39	SIRFDRIVE INPUT MESSAGES.....	88
5.39.1	Msg-ID 0x2D (MID_TrkADCODoGPIO)	88
5.39.2	Msg-ID 0xAC;Sub-ID 0x01 (SID_SetDrNavInit)	89
5.39.3	Msg-ID 0xAC;Sub-ID 0x02(SID_SetDrNavMode)	91
5.39.4	Msg-ID 0xAC;Sub-ID 0x03(SID_SetGyrFactCal).....	92
5.39.5	Msg-ID 0xAC;Sub-ID 0x04(SID_SetDrSensParam)	93
5.39.6	Msg-ID 0xAC;Sub-ID 0x05(SID_PollDrValid).....	94
5.39.7	Msg-ID 0xAC;Sub-ID 0x06(SID_PollGyrFactCal).....	95
5.39.8	Msg-ID 0xAC;Sub-ID 0x07(SID_PollDrSensParam)	96
5.39.9	Msg-ID 0xAC;Sub-ID 0x09(SID_InputCarBusData)	97
5.39.10	Msg-ID 0xAC;Sub-ID 0x0A(SID_CarBusEnabled).....	100
5.39.11	Msg-ID 0xAC;Sub-ID 0x0B(SID_CarBusDisabled).....	101
5.39.12	Msg-ID 0xAC;Sub-ID 0x0C(SID_SetGenericSensorParam).....	101
5.39.13	Msg-ID 0xAC;Sub-ID 0x0D(SID_PollGenericSensorParam).....	103
5.39.14	Msg-ID 0xAC;Sub-ID 0x50(SID_InputMMFData)	105
5.39.15	Msg-ID 0xAC;Sub-ID 0x51(SID_SetMMFMode).....	108
5.40	SGEE DOWNLOAD INPUT.....	109
5.41	SW TOOLBOX INPUT	113
5.41.1	SID 0x01 (1) SID_MeiToCustomIo.....	113
5.41.2	SID 0x02 (2) SID_TrackerConfig.....	114
5.41.3	SID 0x03 (3) SID_PeekPoke.....	116
5.41.4	SID 0x14 (20) SID_PatchStorageControlInput.....	117
5.41.5	SID 0x22 (34) SID_Initial Patch Memory Load Request	118
5.41.6	SID 0x26 (38) SID_Patch Manager Exit Request.....	120
5.41.7	SID 0x28 (40) SID_Patch Manager Start Request	120
5.42	SIRFNAV COMMAND MESSAGES	120
5.42.1	Store GPS Snapshot Information.....	120
6	Output Message Definition.....	121
6.1	POSITION RESPONSE.....	121
6.2	MEASUREMENT RESPONSE.....	133
6.3	EPHEMERIS STATUS RESPONSE	135
6.4	ACK/NACK/ERROR NOTIFICATION	137
6.5	ALMANAC RESPONSE	138
6.6	BROADCAST EPHEMERIS RESPONSE	140
6.7	VERIFIED 50 BPS BROADCAST EPHEMERIS AND IONO DATA	142
6.8	SESSION OPENING RESPONSE	142
6.9	CLIENT STATUS RESPONSE.....	143
6.10	SESSION CLOSING NOTIFICATION.....	144
6.11	HARDWARE CONFIGURATION REQUEST	145
6.12	TIME TRANSFER REQUEST.....	145
6.13	FREQUENCY TRANSFER REQUEST	146
6.14	APPROXIMATE MS POSITION REQUEST	147

DRAFT

DRAFT



One Socket Protocol ICD

This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.6
11/24/2009

6.15	TIME_FREQUENCY_APPROXIMATE_POSITION STATUS RESPONSE	147
6.16	ACK/NACK FOR PUSH AIDING AVAILABILITY	149
6.17	REJECT	149
6.18	SOFTWARE VERSION RESPONSE	150
6.19	SERIAL PORT SETTINGS RESPONSE	152
6.20	CHANNEL LOAD RESPONSE	153
6.21	TX BLANKING RESPONSE	154
6.22	TEST MODE CONFIGURATION RESPONSE	154
6.23	OSP REVISION RESPONSE	155
6.24	NAV BIT AIDING (NBA) REQUEST MESSAGE	155
6.25	HARDWARE CONTROL OUTPUT	156
6.26	DOP VALUES OUTPUT	156
6.27	CW CONTROLLER OUTPUT	157
6.27.1	<i>CW Interference Report</i>	157
6.27.2	<i>CW Mitigation Report</i>	157
6.28	POWER MODE RESPONSE	159
6.29	QUERY RESPONSE	160
6.30	LOW POWER MODE OUTPUT	161
6.31	CLOCK MODELING OUTPUT	162
6.31.1	<i>TCXO Learning Output Request</i>	162
6.31.2	<i>TCXO Learning Clock Model Data Base</i>	163
6.31.3	<i>TCXO Learning Temperature Table</i>	164
6.31.4	<i>TCXO Learning Temperature Recorder</i>	165
6.31.5	<i>TCXO Learning EARC</i>	166
6.31.6	<i>TCXO Learning RTC Alarm</i>	167
6.31.7	<i>TCXO Learning RTC Cal</i>	168
6.31.8	<i>TCXO Learning TBD (Not Used)</i>	169
6.31.9	<i>TCXO Learning MPM Searches</i>	169
6.31.10	<i>TCXO Learning MPM Pre-Positioning</i>	170
6.31.11	<i>TCXO Learning Micro-Nav Measurement</i>	171
6.31.12	<i>TCXO Learning TCXO Uncertainty</i>	172
6.31.13	<i>TCXO Learning System Time Stamp</i>	173
6.32	SGEE DOWNLOAD OUTPUT	174
6.33	SW TOOLBOX OUTPUT	176
6.33.1	<i>SID 0x04 (4) SID_PeekPoke_Response</i>	176
6.33.2	<i>SID 0x05 (5) SID_FlashStore_Response</i>	177
6.33.3	<i>SID 0x06 (6) SID_FlashErase_Response</i>	178
6.33.4	<i>SID 0x07 (7) SID_TrackerConfig_Response</i>	178
6.33.5	<i>SID 0x08 (8) SID_MeiToCustomIo_Response</i>	178
6.33.6	<i>SID 0x90 (144) SID_Patch Manager Prompt</i>	179
6.33.7	<i>SID 0x91(145) SID_Patch Manager Acknowledgement</i>	179
6.34	ASCII DATA OUTPUT	180
6.35	NAVIGATION LIBRARY (NL) AUXILIARY INITIALIZATION DATA	180
6.35.1	<i>Navigation Library (NL) Auxiliary Measurement Data</i>	182
6.35.2	<i>Navigation Library (NL) Aiding Initialization</i>	185
6.36	SENSOR DATA OUTPUT MESSAGES	186
6.37	SIRFDRIVE OUTPUT MESSAGES	191
6.37.1	<i>Msg-ID 0x29 (MID_GeodNavState)</i>	191
6.37.2	<i>Msg-ID 0x2D (MID_TrkADCODoGPIO)</i>	195
6.37.3	<i>Msg-ID 0x30;Sub-ID 0x01 (SID_DrNavStatus)</i>	197
6.37.4	<i>Msg-ID 0x30;Sub-ID 0x02 (SID_DrNavState)</i>	202
6.37.5	<i>Msg-ID 0x30;Sub-ID 0x03 (SID_NavSubSys)</i>	205

DRAFT

DRAFT



One Socket Protocol ICD

This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.6
11/24/2009

6.37.6	<i>Msg-ID 0x30;Sub-ID 0x05 (SID_DrValid)</i>	206
6.37.7	<i>Msg-ID 0x30;Sub-ID 0x06 (SID_GyrFactCal)</i>	208
6.37.8	<i>Msg-ID 0x30;Sub-ID 0x07 (SID_DrSensParam)</i>	209
6.37.9	<i>Msg-ID 0x30;Sub-ID 0x08 (SID_DrDataBlk)</i>	210
6.37.10	<i>Msg-ID 0x30;Sub-ID 0x09 (SID_GenericSensorParam)</i>	211
6.37.11	<i>Msg-ID 0x30;Sub-ID 0x0A (SID_GenericRawOutput)</i>	213
6.37.12	<i>Msg-ID 0x30;Sub-ID 0x50 (SID_MMFStatus)</i>	217
6.37.13	<i>Msg-ID 0x30;Sub-ID 0x64 (SID_GSA)</i>	218
6.37.14	<i>Msg-ID 0x30;Sub-ID 0x65 (SID_DR_NVM)</i>	220
6.37.15	<i>Msg-ID 0x41,Sub-ID 0x81 (MID_GPIO_State)</i>	225
6.37.16	<i>Msg-ID 0xAC;Sub-ID 0x09(SID_InputCarBusData)</i>	226
6.38	MEASUREMENT ENGINE OUTPUT MESSAGE.....	229
6.39	STATISTICS OUTPUT MESSAGE.....	230
7	Message Processing Procedures.....	231
7.1	GENERAL OVERVIEW.....	231
7.1.1	<i>Overview of Message Flow</i>	231
7.1.1.1	<i>Typical Message Flow in Stand-Alone Mode</i>	231
7.1.1.2	<i>Typical Message Flow in Aided Mode</i>	231
7.1.1.3	<i>Typical Low Power Operation</i>	233
7.1.1.4	<i>Push-Mode Aiding Procedure</i>	233
7.1.1.5	<i>Time/Frequency/Approximate Position Status Procedure</i>	234
7.1.2	<i>Message Organization</i>	234
7.1.3	<i>“Reject message” vs. “Error Notification” Messages</i>	237
7.1.4	<i>Error handling</i>	237
7.1.5	<i>Message Time-out Procedures</i>	238
7.2	POWER ON/POWER OFF.....	238
7.3	GPS SOFT RESET.....	238
7.4	ADVANCED POWER MANAGEMENT (APM).....	239
7.5	HARDWARE CONFIGURATION.....	240
7.6	SERIAL PORT MANAGEMENT.....	241
7.7	SESSION OPENING/SESSION CLOSING.....	243
7.8	SESSION SUSPEND/SESSION RESUME.....	244
7.9	APPROXIMATE MS POSITION MANAGEMENT.....	245
7.10	TIME TRANSFER.....	245
7.11	FREQUENCY TRANSFER.....	247
7.12	INTEROPERABILITY BETWEEN DIFFERENT AIR-INTERFACE ICD REVISION NUMBERS.....	249
7.13	SOFTWARE VERSION ID.....	249
7.14	CONFIGURATION OPTION SELECTION STORAGE CONTROL.....	250
7.14.1	<i>Levels of Configuration Option Selection Value Storage</i>	250
7.14.2	<i>Scope and Rules of Configuration Option Storage Control</i>	250
7.14.3	<i>Configuration Option Setting Messages in OSP</i>	251

DRAFT

DRAFT



One Socket Protocol ICD

This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.6
11/24/2009

LIST OF TABLES

TABLE 1: GENERIC PACKET FORMAT	13
TABLE 2: OSP MESSAGE ACCESS	14
TABLE 3: MAPPING BETWEEN AI3MESSAGES AND OSP MESSAGES	27
TABLE 4: MAPPING BETWEEN F MESSAGES AND OSP MESSAGES.....	28
TABLE 5: POSITION REQUEST MESSAGE	30
TABLE 6: VERTICAL ERROR	31
TABLE 7: TIME/ACCURACY PRIORITY	31
TABLE 8: LOCATION_METHOD DEFINITION	32
TABLE 9: SET IONOSPHERIC MODEL MESSAGE.....	32
TABLE 10: SET SATELLITE EPHEMERIS AND CLOCK CORRECTIONS MESSAGE.....	33
TABLE 11: URA CODING	35
TABLE 12: SET ALMANAC ASSIST DATA MESSAGE	38
TABLE 13: SET ACQUISITION ASSISTANCE DATA MESSAGE	40
TABLE 14: DOPPLER_UNCERTAINTY FIELD	41
TABLE 15: SET REAL-TIME INTEGRITY MESSAGE.....	42
TABLE 16: ACK/NACK/ERROR NOTIFICATION MESSAGE.....	43
TABLE 17: ACK/NACK/ERROR FIELD DESCRIPTION	43
TABLE 18: EPHEMERIS STATUS REQUEST MESSAGE	43
TABLE 19 ALMANAC REQUEST MESSAGE.....	44
TABLE 20: SET UTC MODEL MESSAGE	44
TABLE 21: SET GPS TOW ASSIST MESSAGE.....	45
TABLE 22: SET AUXILIARY NAVIGATION MODEL PARAMETERS MESSAGE	46
TABLE 23: BROADCAST EPHEMERIS REQUEST MESSAGE.....	47
TABLE 24: SESSION OPENING REQUEST MESSAGE.....	48
TABLE 25: SESSION_OPEN_REQ_INFO.....	49
TABLE 26: CLIENT STATUS REQUEST MESSAGE	49
TABLE 27: EXISTING TEST MODE CONFIG REQUEST MID AND SID.....	49
TABLE 28: TX BLANKING REQUEST MESSAGE.....	51
TABLE 29: MODE FIELD SPECIFICATION (FOR GSM).....	51
TABLE 30: CHANNEL LOAD QUERY MESSAGE.....	51
TABLE 31: MODE FIELD SPECIFICATION	52
TABLE 32: SERIAL PORT SETTING REQUEST MESSAGE	52
TABLE 33: SOFTWARE VERSION REQUEST MESSAGE.....	54
TABLE 34: REJECT MESSAGE	54
TABLE 35: "REJ_REASON" FIELD DESCRIPTION.....	55
TABLE 36: TIME_FREQUENCY_APPROXIMATE_POSITION STATUS REQUEST MESSAGE	55
TABLE 37: APPROXIMATE MS POSITION RESPONSE MESSAGE	56
TABLE 38: "EST_HOR_ER" FIELD DESCRIPTION.....	56
TABLE 39: FREQUENCY TRANSFER RESPONSE MESSAGE.....	57
TABLE 40: "REL_FREQ_ACC" FIELD DESCRIPTION	58
TABLE 41: REF_CLOCK_INFO FIELD DEFINITION	59
TABLE 42: TIME TRANSFER RESPONSE MESSAGE.....	59
TABLE 43: "TIME_ACCURACY" FIELD DESCRIPTION-"COARSE TIME TRANSFER" METHOD	60
TABLE 44: "TIME_ACCURACY" FIELD DESCRIPTION-"PRECISE TIME TRANSFER" METHOD	61
TABLE 45: PUSH AIDING AVAILABILITY MESSAGE.....	61
TABLE 46: HARDWARE CONFIGURATION RESPONSE MESSAGE	62
TABLE 47: HW_CONFIG FIELD SPECIFICATION	63
TABLE 48: NW_ENHANCE_TYPE DEFINITION.....	63

DRAFT

DRAFT



One Socket Protocol ICD

This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.6
11/24/2009

TABLE 49: SESSION CLOSING REQUEST MESSAGE.....	64
TABLE 50: SESSION_CLOSE_REQ_INFO.....	64
TABLE 51: OSP REVISION REQUEST MESSAGE.....	64
TABLE 52: NAV SUBFRAME 1_2_3 AIDING RESPONSE FIELDS.....	65
TABLE 53: NAV SUBFRAME 4_5 AIDING RESPONSE FIELDS.....	66
TABLE 54: POWER MODE REQUEST SIDS.....	67
TABLE 55: TBF CYCLE TIME DERIVED ON TIME PERIOD LENGTH.....	68
TABLE 56: MAXIMUM VERTICAL ERROR.....	70
TABLE 57: QUERY REQUEST MESSAGE FIELDS.....	72
TABLE 58: QUERY MESSAGE SUPPORT.....	73
TABLE 59: HARDWARE CONTROL INPUT MESSAGE.....	73
TABLE 60: CW CONFIGURATION MESSAGE DEFINITION.....	74
TABLE 61: CW CONFIGURATION FIELD DEFINITIONS.....	74
TABLE 62: TCXO LEARNING INPUT.....	74
TABLE 63: TCXO LEARNING INPUT SID DESCRIPTIONS.....	75
TABLE 64: CLOCK MODEL OUTPUT DEFINITION.....	75
TABLE 65: CLOCK MODEL OUTPUT MESSAGE FIELD DEFINITIONS.....	75
TABLE 66: CLOCK MODEL DATA BASE INPUT MESSAGE DEFINITION.....	76
TABLE 67: CLOCK MODEL DATA BASE INPUT MESSAGE FIELD DEFINITIONS.....	76
TABLE 68: TCXO LEARNING TEMPERATURE TABLE INPUT DEFINITION.....	77
TABLE 69: TCXO LEARNING TEMPERATURE TABLE INPUT FIELD DEFINITIONS.....	77
TABLE 70: TEST MODE CONTROL MESSAGE DEFINITION.....	78
TABLE 71: TEST MODE CONTROL MESSAGE FIELD DEFINITIONS.....	78
TABLE 72: WiFi TAG NOTIFICATION MESSAGE DEFINITION.....	79
TABLE 73: WiFi TAG NOTIFICATION MESSAGE FIELD DEFINITIONS.....	79
TABLE 74: SENSOR CONTROL INPUT.....	81
TABLE 75: SENSOR CONTROL INPUT SID DESCRIPTIONS.....	81
TABLE 76: SENSOR CONFIGURATION MESSAGE INFORMATION.....	81
TABLE 77: SENSOR CONFIGURATION MESSAGE FIELDS DESCRIPTION.....	81
TABLE 78: INFORMATION ON MESSAGES TO TURN SENSORS ON/OFF.....	87
TABLE 79: SENSOR SWITCH MESSAGE FIELDS DESCRIPTION.....	87
TABLE 80: SGEE DOWNLOAD INPUT.....	109
TABLE 81: INPUT MESSAGES SUB-IDS.....	109
TABLE 82: ECLM START DOWNLOAD MESSAGE FIELDS.....	109
TABLE 83: ECLM FILE SIZE MESSAGE FIELDS.....	110
TABLE 84: ECLM PACKET DATA MESSAGE FIELDS.....	110
TABLE 85: GET EE AGE MESSAGE FIELDS.....	111
TABLE 86: GET SGEE AGE MESSAGE FIELDS.....	112
TABLE 87: EE STORAGE CONTROL INPUT MESSAGE.....	112
TABLE 88: EE STORAGE CONTROL INPUT MESSAGE FIELD DEFINITIONS.....	113
TABLE 89: EE STORAGE CONTROL INPUT MESSAGE BIT-FIELD SPECIFICATION.....	113
TABLE 90: SW TOOLBOX INPUT.....	113
TABLE 91: TRACKER MEI TO CUSTOM I/O COMMAND.....	114
TABLE 92: TRACKER CONFIGURATION COMMAND.....	114
TABLE 93: TRACKER PEEK AND POKE COMMAND (FOUR-BYTE PEEK).....	116
TABLE 94: TRACKER PEEK AND POKE COMMAND (FOUR-BYTE POKE).....	116
TABLE 95: TRACKER PEEK AND POKE COMMAND (N-BYTE PEEK).....	117
TABLE 96: TRACKER PEEK AND POKE COMMAND (N-BYTE POKE).....	117
TABLE 97: PATCH STORAGE CONTROL MESSAGE DEFINITION.....	118
TABLE 98: PATCH STORAGE CONTROL MESSAGE FIELD DEFINITIONS.....	118
TABLE 99: PATCH STORAGE CONTROL MESSAGE BIT-FIELD SPECIFICATION.....	118
TABLE 100: INITIAL PATCH MEMORY LOAD REQUEST MESSAGE DEFINITION.....	118

DRAFT

DRAFT



One Socket Protocol ICD

This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.6
11/24/2009

TABLE 101: SUBSEQUENT PATCH MEMORY LOAD REQUEST MESSAGE DEFINITION.....	119
TABLE 102: PATCH MANAGER EXIT REQUEST MESSAGE DEFINITION	120
TABLE 103: PATCH MANAGER START REQUEST MESSAGE DEFINITION	120
TABLE 107: GPS DATA SNAPSHOT SAVING MESSAGE DEFINITION	120
TABLE 108: GPS DATA SNAPSHOT SAVING MESSAGE FIELD DEFINITIONS	120
TABLE 109: POSITION RESPONSE MESSAGE DEFINITION.....	121
TABLE 110: POSITION RESPONSE MESSAGE	121
TABLE 111: DGPS_COR FIELD SPECIFICATION	125
TABLE 112: OTHER_SECTIONS FIELD SPECIFICATION	126
TABLE 113: MAJ_STD_ER FIELD SPECIFICATION	127
TABLE 114: MIN_STD_ER FIELD SPECIFICATION	127
TABLE 115: HEIGHT_STD_ER FIELD SPECIFICATION	128
TABLE 116: VEL_MAJ_STD_ER FIELD SPECIFICATION	129
TABLE 117: VEL_MIN_STD_ER FIELD SPECIFICATION.....	129
TABLE 118: VER_VEL_STD_ER FIELD SPECIFICATION	129
TABLE 119: CLK_STD_ER FIELD SPECIFICATION	131
TABLE 120: INV_WEIGHTS FIELD SPECIFICATION.....	132
TABLE 121: MEASUREMENT RESPONSE MESSAGE DEFINITION.....	133
TABLE 122: MEASUREMENT RESPONSE MESSAGE	133
TABLE 123: MEAS_ERROR_STATUS FIELD	134
TABLE 124: TIME_ACCURACY FIELD	134
TABLE 125: MULTIPATH_INDICATOR FIELD	135
TABLE 126: PSEUDORANGE RMS ERROR REPRESENTATION.....	135
TABLE 127: EPHEMERIS STATUS RESPONSE MESSAGE DEFINITION	135
TABLE 128: EPHEMERIS STATUS RESPONSE MESSAGE.....	136
TABLE 129: ACK/NACK/ERROR NOTIFICATION MESSAGE DEFINITION	137
TABLE 130: ACK/NACK/ERROR NOTIFICATION MESSAGE	138
TABLE 131: ACK/NACK/ERROR FIELD DESCRIPTION	138
TABLE 132: ALMANAC RESPONSE MESSAGE DEFINITION	138
TABLE 133: ALMANAC RESPONSE FIELDS.....	139
TABLE 134: BROADCAST EPHEMERIS RESPONSE MESSAGE DEFINITION.....	140
TABLE 135: BROADCAST EPHEMERIS RESPONSE MESSAGE FIELDS	140
TABLE 136: VERIFIED 50 BPS BROADCAST EPHEMERIS DATA MESSAGE DEFINITION.....	142
TABLE 137: VERIFIED 50 BPS BROADCAST EPHEMERIS MESSAGE STRUCTURE.....	142
TABLE 138: SESSION OPEN MESSAGE DEFINITION	142
TABLE 139: SESSION OPENING NOTIFICATION	143
TABLE 140: SESSION_OPEN_STATUS FIELD DESCRIPTION	143
TABLE 141: CLIENT STATUS RESPONSE	143
TABLE 142: CLIENT STATUS MESSAGE.....	143
TABLE 143: STATUS FIELD SPECIFICATION.....	144
TABLE 144: SESSION CLOSE NOTIFICATION MESSAGE DEFINITION	144
TABLE 145: SESSION CLOSING NOTIFICATION MESSAGE.....	144
TABLE 146: SESSION_CLOSE_STATUS FIELD SPECIFICATION	145
TABLE 147: HARDWARE CONFIGURATION MESSAGE DEFINITION	145
TABLE 148: HARDWARE CONFIGURATION REQUEST MESSAGE	145
TABLE 149: TIME TRANSFER REQUEST MESSAGE DEFINITION	145
TABLE 150: TIME TRANSFER REQUEST MESSAGE	145
TABLE 151: FREQUENCY TRANSFER REQUEST MESSAGE DEFINITION	146
TABLE 152: FREQUENCY TRANSFER REQUEST MESSAGE	146
TABLE 153: "FREQ_REQ_INFO" FIELD DESCRIPTION	146
TABLE 154: APPROXIMATE MS POSITION REQUEST MESSAGE DEFINITION.....	147
TABLE 155: APPROXIMATE MS POSITION REQUEST MESSAGE.....	147

DRAFT

DRAFT



 <p>SiRF A CSR plc Company</p>	One Socket Protocol ICD
<p>This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control.</p>	
<p>Revision 5.6 11/24/2009</p>	

TABLE 156: TIME_FREQUENCY_APPROXIMATE_POSITION STATUS RESPONSE MESSAGE DEFINITION.....	147
TABLE 157: TIME_FREQUENCY_APPROXIMATE_POSITION STATUS RESPONSE MESSAGE.....	147
TABLE 158: REJECT MESSAGE DEFINITION.....	149
TABLE 159: REJECT MESSAGE.....	149
TABLE 160: "REJ_REASON" FIELD DESCRIPTION.....	150
TABLE 161: SOFTWARE VERSION RESPONSE MESSAGE DEFINITION.....	150
TABLE 162: SOFTWARE VERSION RESPONSE MESSAGE.....	150
TABLE 163: SERIAL PORT SETTINGS RESPONSE.....	152
TABLE 164: SERIAL PORT SETTINGS RESPONSE MESSAGE.....	152
TABLE 165: CHANNEL LOAD RESPONSE.....	153
TABLE 166: CHANNEL LOAD RESPONSE MESSAGE.....	153
TABLE 167: TX BLANKING RESPONSE MESSAGE DEFINITION.....	154
TABLE 168: TX BLANKING RESPONSE MESSAGE.....	154
TABLE 169: EXISTING TEST MODE CONFIG RESPONSE MID AND SID.....	154
TABLE 170: OSP REVISION RESPONSE MESSAGE DEFINITION.....	155
TABLE 171: OSP REVISION RESPONSE MESSAGE.....	155
TABLE 172: NAV BIT AIDING (NBA) REQUEST MESSAGE DEFINITION.....	155
TABLE 173: NAV BIT AIDING REQUEST FIELDS.....	156
TABLE 174: HARDWARE CONTROL OUTPUT MESSAGE DEFINITION.....	156
TABLE 175: HARDWARE CONTROL OUTPUT MESSAGE.....	156
TABLE 176: DOP VALUE OUTPUT MESSAGE DEFINITION.....	157
TABLE 177: DOP VALUE OUTPUT FIELDS.....	157
TABLE 178: CW INTERFERENCE REPORT MESSAGE DEFINITION.....	157
TABLE 179: CW INTERFERENCE REPORT FIELD DEFINITIONS.....	157
TABLE 180: CW MITIGATION REPORT MESSAGE DEFINITION.....	158
TABLE 181: CW MITIGATION REPORT FIELD DEFINITIONS.....	158
TABLE 182: POWER MODE RESPONSE MESSAGE DEFINITION.....	159
TABLE 183: SIDS FOR POWER MODE RESPONSE MESSAGE.....	159
TABLE 184: POWER MODE RESPONSE MESSAGE FIELDS.....	159
TABLE 185: POWER MODE RESPONSE ERROR CODE VALUES.....	159
TABLE 186: QUERY RESPONSE MESSAGE DEFINITION.....	160
TABLE 187: QUERY RESPONSE SUPPORTED MESSAGES.....	160
TABLE 188: LOW POWER MODE OUTPUT MESSAGE DEFINITION.....	161
TABLE 189: MPM POWER MODE ERROR MESSAGE.....	161
TABLE 190: TCXO LEARNING OUTPUT.....	162
TABLE 191: TCXO LEARNING OUTPUT SID DESCRIPTIONS.....	162
TABLE 192: CLOCK MODEL DATA BASE MESSAGE DEFINITION.....	163
TABLE 193: CLOCK MODEL DATA BASE MESSAGE FIELD DEFINITIONS.....	163
TABLE 194: TEMPERATURE TABLE MESSAGE DEFINITION.....	164
TABLE 195: TEMPERATURE TABLE MESSAGE FIELD DEFINITIONS.....	164
TABLE 196: TEMPERATURE RECORDER MESSAGE DEFINITION.....	165
TABLE 197: TEMPERATURE RECORDER MESSAGE FIELD DEFINITIONS.....	165
TABLE 198: EARC MESSAGE DEFINITION.....	166
TABLE 199: EARC MESSAGE FIELD DEFINITIONS.....	166
TABLE 200: RTC ALARM MESSAGE DEFINITION.....	167
TABLE 201: RTC ALARM MESSAGE FIELD DEFINITIONS.....	167
TABLE 202: RTC CAL MESSAGE DEFINITION.....	168
TABLE 203: RTC CAL MESSAGE FIELD DEFINITIONS.....	168
TABLE 204: NOT USED.....	169
TABLE 205: MPM SEARCHES MESSAGE DEFINITION.....	169
TABLE 206: MPM SEARCHES MESSAGE FIELD DEFINITIONS.....	169
TABLE 207: MPM PRE-POSITIONING MESSAGE DEFINITION.....	170

DRAFT

DRAFT

 SiRF A CSR plc Company	One Socket Protocol ICD
	Revision 5.6 11/24/2009

This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

TABLE 208: MPM PRE-POSITIONING MESSAGE FIELD DEFINITIONS	170
TABLE 209: MICRO-NAV MEASUREMENT MESSAGE DEFINITION	171
TABLE 210: MICRO-NAV MEASUREMENT FIELD DEFINITIONS.....	171
TABLE 211: TCXO UNCERTAINTY MESSAGE DEFINITION	172
TABLE 212: TCXO UNCERTAINTY MESSAGE FIELD DEFINITIONS	172
TABLE 213: SYSTEM TIME STAMP MESSAGE DEFINITION	173
TABLE 214: SYSTEM TIME STAMP MESSAGE FIELD DEFINITIONS.....	173
TABLE 215: SGEE DOWNLOAD OUTPUT.....	174
TABLE 216 : OUTPUT MESSAGES SUB- IDS.....	174
TABLE 217: ECLM START DOWNLOAD ACK/NACK MESSAGE FIELD DEFINITION.....	174
TABLE 218: OUTPUT ECLM GET EE AGE MESSAGE FIELD DEFINITIONS.....	175
TABLE 219: OUTPUT ECLM GET SGEE AGE MESSAGE FIELD DEFINITIONS.....	176
TABLE 220: TRACKER PEEK RESPONSE (FOUR-BYTE PEEK) (UNSOLICITED).....	177
TABLE 221: TRACKER POKE RESPONSE (FOUR-BYTE POKE OR N-BYTE POKE) (UNSOLICITED)	177
TABLE 222: TRACKER PEEK RESPONSE (N-BYTE PEEK) (UNSOLICITED)	177
TABLE 223: TRACKER FLASH STORE RESPONSE (UNSOLICITED).....	178
TABLE 224: TRACKER FLASH ERASE RESPONSE (UNSOLICITED).....	178
TABLE 225: TRACKER CONFIGURATION RESPONSE (UNSOLICITED).....	178
TABLE 226: TRACKER CUSTOM I/O RESPONSE (UNSOLICITED).....	178
TABLE 104: PATCH MANAGER START REQUEST MESSAGE DEFINITION	179
TABLE 105: PATCH MANAGER ACKNOWLEDGEMENT MESSAGE DEFINITION	179
TABLE 106: PATCH MANAGER ACKNOWLEDGE STATUS BIT FIELD DEFINITION.....	180
TABLE 227: ASCII DATA OUTPUT MESSAGE.....	180
TABLE 228: GENERAL MESSAGE INFORMATION	180
TABLE 229: MESSAGE FIELDS DESCRIPTION	180
TABLE 230: BIT FIELD DESCRIPTION.....	181
TABLE 231: NAVIGATION LIBRARY (NL) AUXILIARY MEASUREMENT DATA	182
TABLE 232: NAVIGATION LIBRARY (NL) AUXILIARY MEASUREMENT DATA MESSAGE FIELD DEFINITIONS	183
TABLE 233: NAVIGATION LIBRARY (NL) AUXILIARY MEASUREMENT DATA STATUS BIT FIELD DEFINITIONS.....	184
TABLE 234: NAVIGATION LIBRARY (NL) AUXILIARY MEASUREMENT DATA EXTENDED STATUS BIT FIELD DEFINITIONS	184
TABLE 235: NAVIGATION LIBRARY (NL) AUXILIARY MEASUREMENT DATA RECOVERY STATUS BIT FIELD DEFINITIONS	185
TABLE 236: NAVIGATION LIBRARY AIDING INITIALIZATION MESSAGE DEFINITION.....	185
TABLE 237: NAVIGATION LIBRARY AIDING INITIALIZATION MESSAGE FIELD DEFINITIONS.....	185
TABLE 238: SENSOR DATA OUTPUT	186
TABLE 239: SENSOR CONTROL INPUT SID DESCRIPTIONS	186
TABLE 240: SENSOR DATA READINGS OUTPUT MESSAGE INFORMATION	186
TABLE 241: SENSOR DATA READINGS OUTPUT MESSAGE FIELDS DESCRIPTION.....	186
TABLE 242: SENSOR DATA READINGS OUTPUT MESSAGE INFORMATION	189
TABLE 243: SENSOR DATA READINGS OUTPUT MESSAGE FIELDS DESCRIPTION.....	190
TABLE 244: RECEIVER STATE OUTPUT MESSAGE INFORMATION	191
TABLE 245: RECEIVER STATE OUTPUT MESSAGE FIELD DESCRIPTION.....	191
TABLE 246 : MEASUREMENT ENGINE OUTPUT MESSAGE	229
TABLE 247: MEASUREMENT ENGINE OUTPUT SID DESCRIPTIONS.....	230
TABLE 248: MESSAGE FIELDS DESCRIPTION	230
TABLE 249 : STATISTICS OUTPUT MESSAGE	230

LIST OF FIGURES

CS-129291-DC2	© SiRF Technology, Inc., a member of the CSR plc group of companies 2009 This material is subject to SiRF's non-disclosure agreement.	Page x of 251
---------------	--	---------------

DRAFT

DRAFT



One Socket Protocol ICD

This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.


Revision 5.6
11/24/2009

FIGURE 1. SENSOR CONTROL ARCHITECTURE BLOCK DIAGRAM.	80
FIGURE 2. EXAMPLE STAND-ALONE MODE MESSAGE FLOW	231
FIGURE 3. EXAMPLE AIDED GPS MESSAGE FLOW	232
FIGURE 4. TYPICAL LOW POWER MESSAGING SEQUENCE	233
FIGURE 5. AGPS MESSAGING SEQUENCE WITH RESPONSE DETAILS. SESSION PART I.....	235
FIGURE 6. AGPS MESSAGING SEQUENCE WITH RESPONSE DETAILS. SESSION PART II.	236

CSR Confidential - Not for external distribution

DRAFT

DRAFT

	One Socket Protocol ICD <div style="border: 2px solid red; padding: 5px; display: inline-block; margin: 10px 0;">This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control.</div> Revision 5.6 11/24/2009
---	--

1 Overview

This document defines all SiRFLoc[®] messages in SiRF Binary format that have not yet been documented in the SiRF Binary Protocol Reference Manual [3]. Also not included are messages reserved for internal SiRF and future use, and the SiRFDRIve[®] messages supporting mostly automotive applications.

2 References

- Ref 1 *Aiding Independent Interoperability Interface*, Rev 2.2, 2008-03-26.
- Ref 2 *SiRFLoc Client Interface Control Document*, Rev 2.1, 2007-08-156.
- Ref 3 *SiRF Binary Protocol Reference Manual*, Revision 2.4.1, April 7, 2009.

CSR Confidential - Not for external distribution

CS-129291-DC2	© SiRF Technology, Inc., a member of the CSR plc group of companies 2009 This material is subject to SiRF's non-disclosure agreement.	Page 12 of 251
---------------	--	----------------

DRAFT

 <p>SiRF A CSR plc Company</p>	<h2>One Socket Protocol ICD</h2> <div style="border: 2px solid red; padding: 5px; display: inline-block; margin: 10px 0;"> <p style="color: red; font-size: small;">This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control.</p> </div> <p>Revision 5.6 11/24/2009</p>
---	--

3 Message Structure and Transport Mechanism

The transport mechanism defined in Ref 3 is used to transport the messages defined in this document.

3.1 Transport Message

Table 1: Generic Packet Format

Start Sequence	Payload Length	PAYLOAD	Checksum	End Sequence
0xA0, 0xA2	2 Bytes (15 bits)	Up to $(2^{11} - 1)$ Bytes	2 Bytes	0xB0, 0xB3

3.2 NMEA Protocol Support

By default, the SiRF chip uses SSB only. NMEA protocol can be supported using one of the following three ways:

1. Reconstruct NMEA messages from OSP (LPL can do so).
2. Configure the SiRF chip in NMEA-only mode through a GPIO pin (TBD).
3. Use "Switch To NMEA Protocol" SiRF Binary message to switch the serial port from SSB to NMEA protocol.

OSP and NMEA protocols cannot be enabled at the same time; either OSP is output or NMEA, not both. If OSP protocol is chosen for output, LPL can reconstruct NMEA messages as per point 1 above.

3.3 Payload Structure

The payload always starts with a one byte long Message ID (MID) field. Depending on the MID value, a one byte Sub ID (SID) field may follow the MID field. Subsequently, and again depending on the value of the MID field on the value of the SID field if it exists, a variable number of message parameter fields follow. This ICD documents the name, the purpose of the value, the length, the type, the units of measurement, the value range and the scale of the value of each field.

In this document, the "scale" of a parameter field specifies a multiplication factor to be applied before placing the parameter value into the message for subsequent transmission between the SLC and CP. For example, if the "duty cycle" parameter value range in the OSP message is a number between 1 – 20; the scale factor shown in the message field description here will be "*0.2", since this is the multiplication factor needed to represent the entire 0 – 100% actual value range as a number in the 1 – 20 range.

The sum of the length of all payload fields, including the MID and SID fields, is captured in the "payload length" field of the message header as a number of bytes, preceding the payload data. This number can not exceed $2^{11} - 1$, i.e. 2047.



This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.0
9/25/2009

4 OSP Message Mappings

4.1 Access to OSP Messages and Their Documentation

OSP	Documented in this volume.
SSB	SiRFStar III messages; documented in the next volume.
SiRFNav Host Library Access Only	The message is a OSP-SSB message but it is currently documented only in the SiRFNav Host Programmer's Reference Manual. It is currently assumed that customers will invoke these OSP messages through the library functions only. (Table heading 1.)
Reserved for SDK Customer Use	These messages are documented separately from the OSP/SSB ICD and from the SiRFNav Host Programmer's Manual. (Table heading 2.)
Reserved for CSR-SiRF Use	These are Message IDs that either have not ever been assigned to any SiRF product use before, used only for internal SiRF development purposes or are obsolete but not reusable. Any Sub ID of any other Message ID in any of the above categories that have not yet been assigned in the documents and inventories listed above are also considered as "SiRF Reserved". If and when such a reserved MID or SID is assigned to an OSP function, the resulting message definition will also be entered in the OSP ICD in the appropriate OSP ICD message description format. (Table heading 3.)

Table 2: OSP Message Access

MID (hex)	MID (dec)	Definition	Sub ID (hex)	Sub ID (dec)	Definition	OSP	SSB	1	2	3
0x00	0	MID_LookInMessage								X
0x01	1	MID_TrueNavigation					X			
0x02	2	MID_MeasuredNavigation					X			
0x03	3	MID_TrueTracker					X			
0x04	4	MID_MeasuredTracker					X			
0x05	5	MID_RawTrkData					X			
0x06	6	MID_SWVersion					X			
0x07	7	MID_ClockStatus					X			



This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.0
9/25/2009

0x08	8	MID_50BPS					X		
0x09	9	MID_ThrPut					X		
0x0A	10	MID_Error					X		
0x0B	11	MID_Ack					X		
0x0C	12	MID_Nak					X		
0x0D	13	MID_VisList					X		
0x0E	14	MID_Almanac					X		
0x0F	15	MID_Ephemeris					X		
0x10	16	MID_TestModeData					X		
0x11	17	MID_RawDGPS					X		
0x12	18	MID_OkToSend					X		
0x13	19	MID_RxMgrParams					X		
0x14	20	MID_TestModeData2					X		
0x15	21	MID_NetAssistReq							X
0x16	22	MID_StopOutput							X
0x17	23	MID_CompactTracker							X
0x18	24	MID_DRCritSave							X
0x19	25	MID_DRStatus							X
0x1A	26	MID_DRHiRateNav							X
0x1B	27	MID_DGPSStatus					X		
0x1C	28	MID_NL_MeasData					X		
0x1D	29	MID_NL_DGPSData					X		
0x1E	30	MID_NL_SVStateData					X		
0x1F	31	MID_NL_InitData					X		
0x20	32	MID_MeasureData							X
0x21	33	MID_NavData							X
0x22	34	MID_SBASData							X
0x23	35	MID_TrkComplete							X
0x24	36	MID_TrkRollover							X
0x25	37	MID_TrkInit							X
0x26	38	MID_TrkCommand							X
0x27	39	MID_TrkReset							X
0x28	40	MID_TrkDownload							X
0x29	41	MID_GeodNavState					X		
0x2A	42	MID_TrkPPS							X
0x2B	43	MID_CMD_PARAM	0x80	128	SSB_QUEUE_CMD_NI		X		
			0x85	133	SSB_QUEUE_CMD_DGPS_SRC		X		
			0x88	136	SSB_QUEUE_CMD_SNM		X		
			0x89	137	SSB_AUEUE_CMD_SDM		X		
			0x8A	138	SSB_QUEUE_CMD_SDGPSM		X		
			0x8B	139	SSB_QUEUE_CMD_SEM		X		
			0x8C	140	SSB_QUEUE_CMD_SPM		X		



This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.0
9/25/2009

			0x8F	143	SSB_QUEUE_CMD_SSN		X		
			0x97	151	SSB_QUEUE_CMD_LP		X		
			0xAA	170	SSB_QUEUE_CMD_SSBAS		X		
0x2C	44	MID_LLA							X
0x2D	45	MID_TrkADCOdoGPIO					X		
0x2E	46	MID_TestModeData3					X		
0x2F	47	MID_NavComplete							X
0x30	48	MID_DrOut	0x01	1	SID_DrNavStatus		X		
			0x02	2	SID_DrNavState		X		
			0x03	3	SID_NavSubsys		X		
			0x04	4	SID_RawDr		X		
			0x05	5	SID_DrValid		X		
			0x06	6	SID_GyrFactCal		X		
			0x07	7	SID_DrSensParam		X		
			0x08	8	SID_DrDataBlk		X		
			0x09	9	SID_GenericSensorParam		X		
			0x0A	10	SID_GenericRawOutput	X			
			0x50	80	SID_MMFStatus	X			
0x31	49	MID_OemOut					X		
0x32	50	MID_SbasParam					X		
0x33	51	MID_SiRFNavNotification	0x01	1	SID_GPS_SIRFNAV_COMPLETE			X	
			0x02	2	SID_GPS_SIRFNAV_TIMING				X
			0x03	3	SID_GPS_DEMO_TIMING				X
			0x04	4	SID_GPS_SIRFNAV_TIME_TAGS			X	
			0x05	5	SID_GPS_NAV_IS801_PSEUDORANGE_DATA				X
			0x06	6	GPS_TRACKER_LOADER_STATE				X
				7	SSB_SIRFNAV_START				X
				8	SSB_SIRFNAV_STOP				X
			0x09	9	SSB_RESULT				X
			0x0A - 0x0F	10 - 15					X
			0x10	16	DEMO_TEST_STATUS				X
			0x11	17	DEMO_TEST_STATE				X
			0x12	18	DEMO_TEST_DATA				X
			0x13	19	DEMO_TEST_STATS				X
			0x14	20	DEMO_TEST_ERROR				X
0x34	52	MID_PPS_Time					X		
0x35	53								X
0x36	54	SSB_EVENT	0x01	1	SSB_STARTUP_INFO			X	
0x37	55	MID_TestModeTrackData					X		
0x38	56	SSB_EE	0x01	1	SSB_EE_GPS_TIME_INFO		X		
			0x02	2	SSB_EE_INTEGRITY		X		
			0x03	3	SSB_EE_STATE		X		



This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control.

Revision 5.0
9/25/2009

			0x04	4	SSB_EE_CLK_BIAS_ADJ		X		
			0x05	5	SSB_EE_X-CORR_FREE				X
			0x11	17	SSB_EE_EPHEMERIS_AGE		X		
			0x12	18			X		
			0x20	32	ECLM_Ack/Nack	X			
			0x21	33	ECLM_EE_Age	X			
			0x22	34	ECLM_SGEE_Age	X			
			0xFF	255	SSB_EE_ACK		X		
0x39	57	MID_SYNEPHINT							X
0X3A	58	MID_GPIO_OUTPUT	0x01	1	SID_GPIOParam				X
			0x02	2	SID_GPIOStatus				X
0X3B	59	MID_BT_OUTPUT							X
0X3C	60	MID_AutoCorr							X
0X3D	61	MID_FAILURE_STATUS_RESPONSE							X
0X3E	62	MID_ExceptionInfo							X
0X3F	63	MID_TESTMODE_OUTPUT	0x07	7	SSB_TEST_MODE_DATA_7		X		
0x40	64		0x00	0					X
0x40	64	MID_NL_AuxData	0x01	1	NL_AUX_INIT_DATA	X			
			0x02	2	NL_AUX_MEAS_DATA	X			
			0x03	3	NL_AUX_AID_DATA	X			
0x41	65	SSB_TRACKER_DATA_GPIO_STATE	0xC0	192			X		
0x42	66	SSB_DOP_VALUES				X			
0x43	67								X
0x44	68	MID_MEAS_ENG_OUT						X	
0x45	69	MID_POS_MEAS_RESP	0x01	1	POS_RESP	X			
			0x02	2	MEAS_RESP	X			
0x46	70	MID_STATUS_RESP	0x01	1	EPH_RESP	X			
			0x02	2	ALM_RESP	X			
			0x03	3	B_EPH_RESP	X			
			0X04	4	TIME_FREQ_APPROX_POS_RESP	X			
			0x05	5	CH_LOAD_RESP	X			
			0x06	6	CLIENT_STATUS_RESP	X			
			0x07	7	OSP_REV_RESP	X			
			0x08	8	SERIAL_SETTINGS_RESP	X			
			0x09	9	TX_BLANKING_RESP	X			
0x47	71	MID_HW_CONFIG_REQ				X			
0x48	72	MID_SensorData	0x01	1	SENSOR_READINGS	X			
			0x02	2	FACTORY_STORED_PARAMS	X			
			0x03	3	RECV_STATE	X			
0x49	73	MID_AIDING_REQ	0x01	1	APPROX_MS_POS_REQ	X			



This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.0
9/25/2009

			0x02	2	TIME_TX_REQ	X			
			0x03	3	FREQ_TX_REQ	X			
			0x04	4	NBA_REQ	X			
0x4A	74	MID_SESSION_CONTROL_RESP	0X01	1	SESSION_OPEN_RESP	X			
			0X02	2	SESSION_CLOSE_RESP	X			
0x4B	75	MID_MSG_ACK_OUT	0X01	1	ACK_NACK_ERROR	X			
			0X02	2	REJECT	X			
0x4C	76								X
0x4D	77	MID_LP_OUTPUT	0x01	1	MPM_ERR	X			
0x4E	78								X
0x4F	79								X
0x50	80								X
0x51	81	MID_QUERY_RESP	All (see ICD)			X			
0x52	82								X
0x53	83								X
0x54	84								X
0x55	85								X
0x56	86								X
0x57	87								X
0x58	88								X
0x59	89		0x01	1	Reserving for known need. Waiting for def'n.				X
0x5A	90	MID_PWR_MODE_RESP	0x00	0	ERR_RESP	X			
			0x01	1	APM_RESP	X			
			0x02	2	MPM_RESP	X			
			0x03	3	TP_RESP	X			
			0x04	4	PTF_RESP	X			
0x5B	91	MID_HW_CTRL_OUT	0x01	1	VCTCXO	X			
			0x02	2	ON_OFF_SIG_CONFIG	X			
0x5C	92	MID_CW_CONTROLLER_RESP	0x01	1	SCAN_RESULT	X			
			0x02	2	FILTER_CONDITIONS	X			
			0x03	3	MON_RESULTS				X
0x5D	93	MID_TCXO_LEARNING_OUT	0x00	0	Not Used				X
			0x01	1	CLOCK_MODEL_DATA_BASE_OUT	X			
			0x02	2	TEMPERATURE_TABLE	X			
			0x03	3	Not Used				X
			0x04	4	TEMP_RECORDER_MESSAGE	X			
			0x05	5	EARC	X			
			0x06	6	RTC_ALARM	X			
			0x07	7	RTC_CAL	X			
			0x08	8	MPM_ACQUIRED	X			
			0x09	9	MPM_SEARCHES	X			
			0x0A	10	MPM_PREPOS	X			



This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.0
9/25/2009

			0x0B	11	MICRO_NAV_MEASUREMENT	X				
			0x0C	12	TCXO_UNCERTAINTY	X				
			0x0D	13	SYSTEM_TIME_STAMP	X				
0x5E	94	Reserved for Russ Thomas								X
0x5F	95									X
0x60	96	MID_Peek_Response								X
0x61	97	MID_UserOutputBegin								X
0x62	98	RESERVED for SDK User							X	
0x63	99	RESERVED for SDK User							X	
0x64	100	RESERVED for SDK User							X	
0x65	101	RESERVED for SDK User							X	
0x66	102	RESERVED for SDK User							X	
0x67	103	RESERVED for SDK User							X	
0x68	104	RESERVED for SDK User							X	
0x69	105	RESERVED for SDK User							X	
0X6A	106	RESERVED for SDK User							X	
0X6B	107	RESERVED for SDK User							X	
0X6C	108	RESERVED for SDK User							X	
0X6D	109	RESERVED for SDK User							X	
0X6E	110	RESERVED for SDK User							X	
0X6F	111	RESERVED for SDK User							X	
0x70	112	RESERVED for SDK User							X	
0x71	113	RESERVED for SDK User							X	
0x72	114	RESERVED for SDK User							X	
0x73	115	RESERVED for SDK User							X	
0x74	116	RESERVED for SDK User							X	
0x75	117	RESERVED for SDK User							X	
0x76	118	RESERVED for SDK User							X	
0x77	119	RESERVED for SDK User							X	
0x78	120	RESERVED for SDK User							X	
0x79	121	RESERVED for SDK User							X	
0x7A	122	RESERVED for SDK User							X	
0x7B	123	RESERVED for SDK User							X	
0x7C	124	RESERVED for SDK User							X	
0x7D	125	RESERVED for SDK User							X	
0x7E	126	RESERVED for SDK User							X	
0x7F	127	MID_UserOutputEnd								X
0x80	128	MID_NavigationInitialization					X			
0x81	129	MID_SetNMEAMode					X			
0x82	130	MID_SetAlmanac					X			
0x83	131	MID_FormattedDump					X			
0x84	132	MID_PollSWVersion					X			



This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.0
9/25/2009

0x85	133	MID_DGPSSourceControl					X		
0x86	134	MID_SetSerialPort					X		
0x87	135	MID_SetProtocol					X		
0x88	136	MID_SET_NAV_MODE					X		
0x89	137	MID_SET_DOP_MODE					X		
0x8A	138	MID_SET_DGPS_MODE					X		
0x8B	139	MID_SET_ELEV_MASK					X		
0x8C	140	MID_SET_POWER_MASK					X		
0x8D	141	MID_SET_EDITING_RES					X		
0x8E	142	MID_SET_SS_DETECTOR					X		
0x8F	143	MID_SET_STAT_NAV					X		
0x90	144	MID_PollClockStatus					X		
0x91	145	MID_SetDGPSPort					X		
0x92	146	MID_PollAlmanac					X		
0x93	147	MID_PollEphemeris					X		
0x94	148	MID_FlashUpdate					X		
0x95	149	MID_SetEphemeris					X		
0x96	150	MID_SwitchOpMode					X		
0x97	151	MID_LowPower					X		
0x98	152	MID_PollRxMgrParams					X		
0x99	153	MID_TOWSync							X
0x9A	154	MID_PollTOWSync							X
0x9B	155	MID_EnableTOWSyncInterrupt							X
0x9C	156	MID_TOWSyncPulseResult							X
0x9D	157	MID_DRSetup							X
0x9E	158	MID_DRData							X
0x9F	159	MID_DRCritLoad							X
0xA0	160	MID_HeadSync0							X
0xA1	161	MID_SSB_SIRFNAV_COMMAND	0x01	1	SSB_DEMO_SET_RESTART_MODE				X
			0x02	2	SSB_DEMO_TEST_CPU_STRESS				X
			0x03	3	SSB_DEMO_STOP_TEST_APP				X
				4	Nothing specified for SID 0x04.				X
			0x05	5	SSB_DEMO_START_GPS_ENGINE				X
			0x06	6	SSB_DEMO_STOP_GPS_ENGINE				X
			0x07	7	SSB_SIRFNAV_STORE_NOW	X			
			0x08	8	SSB_DEMO_START_NAV_ENGINE				X
			0x09	9	SSB_SET_IF_TESTPOINT				X
			0x0A - 0x0F	10 - 15					X
			0x10	16	SSB_DEMO_TEST_CFG_CONTINUOUS				X
			0x11	17	SSB_DEMO_TEST_CFG_RESTARTS				X
			0x12	18	SSB_DEMO_TEST_CFG_RF_ON_OFF				X
			0x13 - 0x1D	19 - 29					X



This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control.

Revision 5.0
9/25/2009

			0x1E	30	SSB_DEMO_TEST_CFG_DELETE				X
			0x1F	31	SSB_DEMO_TEST_CFG_POLL				X
			0x20	32	SSB_DEMO_TEST_START				X
			0x21	33	SSB_DEMO_TEST_STOP				X
			0x22 - 0x2F	34 - 47					X
			0x30	48	SSB_DEMO_TEST_POLL_STATUS				X
			0x31	49	SSB_DEMO_TEST_RF_ATTENUATION				X
			0x32 - 0x3F	50 - 63					X
			0x40	64	SSB_DEMO_TEST_REF_POSITION				X
			0x41	65	SSB_DEMO_TEST_PFC_CONTINUOUS				X
			0x42	66	SSB_DEMO_TEST_PFC_RESTARTS				X
0xA2	162	MID_HeadSync1							X
0xA3	163								X
0xA4	164								X
0xA5	165	MID_ChangeUartChnl					X		
0xA6	166	MID_SetMsgRate					X		
0xA7	167	MID_LPACqParams					X		
0xA8	168	MID_POLL_CMD_PARAM					X		
0xA9	169	MID_SetDatum					X		
0xAA	170	MID_SetSbasParam					X		
0xAB	171	MID_AdvancedNavInit							X
0xAC	172	MID_DrIn	0x01	1	SID_SetDrNavInit		X		
			0x02	2	SID_SetDrNavMode		X		
			0x03	3	SID_SetGyrFactCal		X		
			0x04	4	SID_SetDrSensParam		X		
			0x05	5	SID_PollDrValid		X		
			0x06	6	SID_PollGyrFactCal		X		
			0x07	7	SID_PollDrSensParam		X		
			0x08	8	SID_Jamie Colley ?				X
			0x09	9	SID_InputCarBusData		X		
			0x0A	10	SID_CarBusEnabled		X		
			0x0B	11	SID_CarBusDisabled		X		
			0x0C	12	SID_SetGenericSensorParam				
			0x0D	13	SID_PollGenericSensorParam				
			0x0E	14	SID_InputCarBusData2		X		
			0x0F	15	SID_DR_Factory_Test_Calibration				X
			0x10	16	SID_DR_Initial_User_Information				X
			0x11	17	SID_DR_Output_Nav_Information				X
			0x12	18	SID_DR_Uncertainty_Information				X
			0x13	19	SID_DR_Debug_Information		X		
			0x50	80	SSB_MMF_DATA				
			0x51	81	SSB_MMF_SET_MODE				



This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.0
9/25/2009

0xAD	173	MID_OemPoll								X
0xAE	174	MID_OemIn								X
0xAF	175	MID_SendCommandString						X		
0xB0	176	MID_TailSync0								X
0xB1	177	GPS_NAV_LPL_CMDR	0x00	0	LPL_CMDR_POLL_STATUS					X
			0x01	1	LPL_CMDR_POLL_STATUS_RESP					X
			0x02	2	LPL_CMDR_SESSION_START					X
			0x03	3	LPL_CMDR_SESSION_START_RESP					X
			0x04	4	LPL_CMDR_SESSION_STOP					X
			0x05	5	LPL_CMDR_SESSION_IN_PROGRESS					X
			0x06	6	LPL_CMDR_SESSION_IN_PROGRESS_RESP					X
			0x07	7	LPL_CMDR_SESSION_STATUS					X
			0x08	8	LPL_CMDR_SET_PLATFORM_CONFIG					X
			0x09	9	LPL_CMDR_GET_PLATFORM_CONFIG_REQST					X
			0x0A	10	LPL_CMDR_GET_PLATFORM_CONFIG_RESP					X
			0x0B	11	LPL_CMDR_LOAD_NMR_FILE					X
			0x0C	12	LPL_CMDR_GET_NMR_FILE_STATUS					X
			0x0D	13	LPL_CMDR_START_LOGFILE					X
			0x0E	14	LPL_CMDR_STOP_LOGFILE					X
			0x0F	15	LPL_CMDR_GET_LOGFILE_STATUS_RE					X
			0x10	16	LPL_CMDR_GET_LOGFILE_STATUS_RESP					X
			0x11	17	LPL_CMDR_IS_EE_AVAILABLE_REQST					X
			0x12	18	LPL_CMDR_IS_EE_AVAILABLE_RESP					X
			0x13	19	LPL_CMDR_GET_EE_DATA					X
			0x14	20	LPL_CMDR_GET_EE_DATA_RESP					X
			0x15	21	LPL_CMDR_SET_POWER_MODE					X
			0x16	22	LPL_CMDR_GET_POWER_MODE_REQST					X
			0x17	23	LPL_CMDR_GET_POWER_MODE_RESP					X
0xB2	178	SIRF_MSG_SSB_TRACKER_IC	0x00	0	Reserved			X		
			0x01	1	SIRF_MSG_SSB_MEI_TO_CUSTOMIO			X		
			0x02	2	SIRF_MSG_SSB_TRKR_CONFIG			X		
			0x03	3	SIRF_MSG_SSB_TRKR_PEEKPOKE_CMD			X		
			0x04	4	SIRF_MSG_SSB_TRKR_PEEKPOKE_RSP			X		
			0x05	5	SIRF_MSG_SSB_TRKR_FLASHSTORE_RSP			X		
			0x06	6	SIRF_MSG_SSB_TRKR_FLASHERASE_RSP			X		
			0x07	7	SIRF_MSG_SSB_TRKR_HWCONFIG_RSP			X		
			0x08	8	SIRF_MSG_SSB_TRKR_CUSTOMIO_RSP			X		
			0x14	20	PATCH_STORAGE_CONTROL			X		
			0x22	34	PATCH_MEMORY_LOAD_REQUEST			X		
			0x26	38	PATCH_MEMORY_EXIT_REQUEST			X		
			0x28	40	PATCH_MEMORY_START_REQUEST			X		
			0x90	144	PATCH_MANAGER_PROMPT			X		



This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.0
9/25/2009

			0x91	145	PATCH MANAGER ACKNOWLEDGEMENT	X				
0xB3	179	MID_TailSync1								X
0xB4	180	MID_UserInputEnd								X
0xB5	181	RESERVED for SDK User							X	
0xB6	182	RESERVED for SDK User							X	
0xB7	183	RESERVED for SDK User							X	
0xB8	184	RESERVED for SDK User							X	
0xB9	185	RESERVED for SDK User							X	
0xBA	186	RESERVED for SDK User							X	
0xBB	187	RESERVED for SDK User							X	
0xBC	188	RESERVED for SDK User							X	
0xBD	189	RESERVED for SDK User							X	
0xBE	190	RESERVED for SDK User							X	
0xBF	191	RESERVED for SDK User							X	
0xC0	192	RESERVED for SDK User							X	
0xC1	193	RESERVED for SDK User							X	
0xC2	194	RESERVED for SDK User							X	
0xC3	195	RESERVED for SDK User							X	
0xC4	196	RESERVED for SDK User							X	
0xC5	197	RESERVED for SDK User							X	
0xC6	198	RESERVED for SDK User							X	
0xC7	199	MID_UserInputEnd								X
0xC8	200	MID_GPIO_INPUT	0x01	1	SID_PollGPIOParam					X
			0x02	2	SID_SetGPIO					X
0xC9	201	MID_BT_INPUT								X
0xCA	202	MID_POLL_FAILURE_STATUS								X
0xCB	203	GPS_TRK_TESTMODE_COMMAND								X
0xCC	204	MID_MEAS_ENG_IN								X
0xCD	205	MID_SetGenericSWControl	0x10	16	SSB_SW_CMDMANDED_OFF			X		
0xCE	206	MID_RF_Test_Point						X		
0xCF	207	MID_INT_CPUPause						X		
0xD0	208	MID_SiRFLoc								X
0xD1	209	MID_QUERY_REQ				X				
0xD2	210	MID_POS_REQ				X				
0xD3	211	MID_SET_AIDING	0x01	1	SET_IONO	X				
			0x02	2	SET_EPH_CLOCK	X				
			0x03	3	SET_ALM	X				
			0x04	4	SET_ACQ_ASSIST	X				
			0x05	5	SET_RT_INTEG	X				
			0x06	6	SET_UTC_MODEL	X				
			0x07	7	SET_GPS_TOW_ASSIST	X				



This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.0
9/25/2009

			0x08	8	SET_AUX_NAV	X			
			0x09	9	SET_AIDING_AVAIL	X			
0xD4	212	MID_STATUS_REQ	0x01	1	EPH_REQ	X			
			0x02	2	ALM_REQ	X			
			0x03	3	B_EPH_REQ	X			
			0x04	4	TIME_FREQ_APPROX_POS_REQ	X			
			0x05	5	CH_LOAD_REQ	X			
			0x06	6	CLIENT_STATUS_REQ	X			
			0x07	7	OSP_REV_REQ	X			
			0x08	8	SERIAL_SETTINGS_REQ	X			
			0x09	9	TX_BLANKING_REQ	X			
0xD5	213	MID_SESSION_CONTROL_REQ	0x01	1	SESSION_OPEN_REQ	X			
			0x02	2	SESSION_CLOSE_REQ	X			
0xD6	214	MID_HW_CONFIG_RESP				X			
0xD7	215	MID_AIDING_RESP	0x01	1	APPROX_MS_POS_RESP	X			
			0x02	2	TIME_TX_RESP	X			
			0x03	3	FREQ_TX_RESP	X			
			0x04	4	SET_NBA_SF1_2_3	X			
			0x05	5	SET_NBA_SF4_5	X			
0xD8	216	MID_MSG_ACK_IN	0x01	1	ACK_NACK_ERROR	X			
			0x02	2	REJECT	X			
0xD9	217		0x01	1	SENSOR_ON_OFF				X
0xDA	218	MID_PWR_MODE_REQ	0x00	0	FP_MODE_REQ	X			
			0x01	1	APM_REQ	X			
			0x02	2	MPM_REQ	X			
			0x03	3	TP_REQ	X			
			0x04	4	PTF_REQ	X			
0xDB	219	MID_HW_CTRL_IN	0x01	1	VCTCXO	X			
			0x02	2	ON_OFF_SIG_CONFIG	X			
0xDC	220	MID_CW_CONTROLLER_REQ	0x01	1	CONFIG	X			
			0x02	2	EVENT_REG				X
			0x03	3	COMMAND_SCAN				X
			0x04	4	CUSTOM_MON_CONFIG				X
			0x05	5	FFT_NOTCH_SETUP				X
0xDD	221	MID_TCXO_LEARNING_IN	0x00	0	OUTPUT_REQUEST	X			
			0x01	1	CLOCK_MODEL_DATA_BASE	X			
			0x02	2	TEMPERATURE_TABLE	X			
			0x03	3	TEST_MODE_CONTROL	X			
			0x04	4	Not Used				X
			0x05	5	Not Used				X
			0x06	6	Not Used				X
			0x07	7	Not Used				X



This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.0
9/25/2009

			0x08	8	Not Used					X
			0x09	9	Not Used					X
			0x0A	10	Not Used					X
			0x0B	11	Not Used					X
			0x0C	12	Not Used					X
0xDE	222	Reserved for Russ Thomas								X
0xDF	223									X
0xE0	224	MID_Peek_Poke_Command								X
0xE1	225	MID_SiRFOutput		6	STATISTICS	x	X			
0xE2	226	MID_UI_LOG								
0xE3	227	MID_NL_MeasResi								
0xE4	228	MID_SiRFInternal								
0xE5	229	MID_SysInfo								X
0xE6	230	MID_SysInfoOut								X
0xE7	231	MID_UserDebugMessage								X
0xE8	232	MID_EE_INPUT	0x01	1	SSB_EE_SEA_PROVIDE_EPH		X			
			0x02	2	SSB_EE_POLL_STATE		X			
			0x10	16	SSB_EE_FILE_DOWNLOAD					X
			0x11	17	SSB_EE_QUERY_AGE					X
			0x12	18	SSB_EE_FILE_PART					X
			0x13	19	SSB_EE_DOWNLOAD_TCP					X
			0x14	20	SSB_EE_SET_EPHEMERIS					X
			0x15	21	SSB_EE_FILE_STATUS					X
			0x16	22	ECLM_Start_Download	X				
			0x17	23	ECLM_File_Size	X				
			0x18	24	ECLM_Packet_Data	X				
			0x19	25	Get_EE_Age	X				
			0x1A	26	Get_SGEE_Age	X				
			0xFD	253	EE_STORAGE_CONTROL	X				
			0xFE	254	SSB_EE_DISABLE_EE_SECS					X
			0xFF	255	SSB_EE_DEBUG		X			
0xE9	233	MID_SetRFPParams	0x01	1	SET_GRF3iPLUS_IF_BANDWIDTH		X			
			0x02	2	SET_GRF3iPLUS_POWER_MODE		X			
			0x0A	10	POLL_GRF3iPLUS_IF_BANDWIDTH		X			
			0x0B	11	POLL_GRF3iPLUS_POWER_MODE		X			
			0xA5	165	SET_GRF3iPLUS_IF_TESTPOINT_PARAM					
			0xA6	166	SET_GRF3iPLUS_AGC_MODE					
			0xFE	254	OUTPUT_GRF3iPLUS_POWER_MODE		X			
			0xFF	255	OUTPUT_GRF3iPLUS_IF_BANDWIDTH		X			
0xEA	234	MID_SensorControl	0x01	1	SENSOR_CONFIG	X				
			0x02	2	SENSOR_SWITCH	X				
0xEB	235	MID_WiFi_Tag				X				



This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.0
9/25/2009

0xEC	236									X
0xED	237									X
0xEE	238									X
0xEF	239									X
0xF0	240									X
0xF1	241									X
0xF2	242									X
0xF3	243									X
0xF4	244	MID_BufferFull								X
0xF5	245	MID_ParityError								X
0xF6	246	MID_RcvFullError								X
0xF7	247	MID_RcvOverrunError								X
0xF8	248	MID_FrameError								X
0xF9	249	MID_BreakInterrupt								X
0xFA	250	MID_BufferTerminated								X
0xFB	251	MID_TransportDataErr								X
0xFC	252	MID_CheckSumError								X
0xFD	253	MID_LengthError								X
0xFE	254	MID_MessageTypeError								X
0xFF	255	MID_ASCIIData						X		

CSR Confidential - Not for external distribution

DRAFT

 <p>SiRF A CSR plc Company</p>	<h2>One Socket Protocol ICD</h2> <div style="border: 2px solid red; padding: 5px; display: inline-block; margin: 10px 0;"> <p>This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control.</p> </div> <p>Revision 5.5 11/16/2009</p>
--	--


4.2 Mapping between AI3 Messages and OSP Messages

Table 3: Mapping between AI3Messages and OSP Messages

AI3	OSP	Input or Output
AI3 Request	Position Request	I
	Set Ionospheric Model	I
	Set Satellite Ephemeris and Clock Corrections	I
	Set Almanac Assist Data	I
	Set Acquisition Assistance Data	I
	Set Real-Time Integrity	I
	Deleted ICD_REV_NUM, ALM_REQ_FLAG, IONO_FLAG	
	Move NEW_ENHANCE_TYPE to "Hardware Configuration Response" message	
	AI3 Response	Position Response
Measurement Response		O
Deleted fields from SUBALM_FLAG to SUBALM_TOA		
Deleted fields from CP_VALID_FLAG to PR_ERR_TH		
ACK/NACK Message	ACK/NACK/Error Notification	I and O
SLC/CP Message ACK.NACK		
SLC Ephemeris Status Request	Ephemeris Status Request	I
Unsolicited SLC Ephemeris Status Response	Ephemeris Status Response	O
Solicited SLC Ephemeris Status Response		O
Poll Almanac Request	Almanac Request	I
Poll Almanac Response	Almanac Response	O
Unsolicited SLC EE Integrity Warning	Replaced by the existing SSB message: "Extended Ephemeris Integrity – Message ID 56 (Sub ID 2)"	
Unsolicited SLC EE Clock Bias Adjustment	Replaced by the existing SSB message: "EE Provide Synthesized Ephemeris Clock Bias Adjustment Message – Message ID 56 (Sub ID 4)"	
CP Send Auxiliary NAV Message	Set UTC Model	I
	Set GPS TOW Assist	I
	Set Auxiliary Navigation Model Parameters	I
Aiding Request Message	Deleted since RRC/RRLP doesn't provide NAV subframe aiding	
NAV Subframe 1_2_3 Aiding Response Message	<AI – keep this message>	
NAV Subframe 4_5 Aiding Response Message	<AI – keep this message>	
Broadcast Ephemeris Request Message	Broadcast Ephemeris Request	I
Broadcast Ephemeris Response Message	Broadcast Ephemeris Response	O

CS-129291-DC2	© SiRF Technology, Inc., a member of the CSR plc group of companies 2009 This material is subject to SiRF's non-disclosure agreement.	Page 27 of 251
---------------	--	----------------

DRAFT


 <p>SiRF A CSR plc Company</p>	<h2>One Socket Protocol ICD</h2> <div style="border: 2px solid red; padding: 5px; display: inline-block; margin: 10px 0;"> This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control. </div> <p>Revision 5.5 11/16/2009</p>
--	---

4.3 Mapping between F Messages and OSP Messages

Table 4: Mapping between F Messages and OSP Messages

F	OSP	Input or Output
Session Open Request	Session Open Request	I
Session Open Notification	Session Open Notification	O
Error Notification	Replaced by "ACK/NACK/Error Notification" message	
SLC Status	SLC Status	O
Session Closing Request	Session Closing Request	I
Session Closing Notification	Session Closing Notification	O
Hardware Configuration Request	Hardware Configuration Request	O
Hardware Configuration Response	Hardware Configuration Response	I
Time Transfer Request	Time Transfer Request	O
Time Transfer Response	Time Transfer Response	I
Frequency Transfer Request	Frequency Transfer Request	O
Frequency Transfer Response	Frequency Transfer Response	I
Approximate MS Position Request	Approximate MS Position Request	O
Approximate MS Position Response	Approximate MS Position Response	I
Time_Frequency_ApproximatePosition Status Request	Time_Frequency_Approximate_Position Status Request	I
Time_Frequency_ApproximatePosition Status Response	Time_Frequency_Approximate_Position Status Response	O
Push Aiding Availability	Push Aiding Availability	I
ACK/NACK for Push Aiding Availability	ACK/NACK for Push Aiding Availability	O
Wireless Power Request	Deleted since we have not implemented this feature	
Wireless Power Response	Deleted since we have not implemented this feature	
Reject	Reject	O
Reset GPS Command	Replaced by the existing "Initialize Data Source – Message ID 128" message	
Software Version Request	Software Version Request	I
Software Version Response	Software Version Response	O
Set APM	"Power Mode Request" Msg ID 218 subsumes	I
Ack APM	"Power Mode Response" Msg ID 90 subsumes	O
Serial Port Setting Request	Serial Port Setting Request	I
Serial Port Setting Response	Serial Port Setting Response	O
Channel Open Request	Deleted since there is no logical channel anymore	
Channel Open Response	Deleted since there is no logical channel anymore	
Channel Close Request	Deleted since there is no logical channel anymore	
Channel Close Response	Deleted since there is no logical channel anymore	

DRAFT

 SiRF A CSR plc Company	One Socket Protocol ICD <div style="border: 2px solid red; padding: 5px; display: inline-block; color: red; font-weight: bold;">This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control.</div> Revision 5.5 11/16/2009
--	---

F	OSP	Input or Output
Channel Priority Request	Deleted since there is no logical channel anymore	
Channel Priority Response	Deleted since there is no logical channel anymore	
Priority Query	Deleted since there is no logical channel anymore	
Priority Response	Deleted since there is no logical channel anymore	
Channel Load Query	Channel Load Query	I
Channel Load Response	Channel Load Response	O
Tx Blanking Request	Tx Blanking Request	I
Tx Blanking Response	Tx Blanking Response	O
Test Mode Configuration Request	Test Mode Configuration Request	I
Test Mode Configuration Response	Test Mode Configuration Response	O
ICD Version Request	Deleted since we cannot trace AI3 and F ICD version anymore	
ICD Version Response	Deleted since we cannot trace AI3 and F ICD version anymore	

CSR Confidential - Not for external distribution

DRAFT



This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

5 Input Message Definitions

5.1 Position Request

MID (Hex) 0xD2
MID (Dec) 210
Message Name in Code MID_POS_REQ

Table 5: Position Request message

Field	Bytes	Scale	Unit
Message ID	1		
POS_REQ_ID	1		
NUM_FIXES	1		
TIME_BTW_FIXES	1	1	Seconds
HORI_ERROR_MAX	1		Meters
VERT_ERROR_MAX	1		
RESP_TIME_MAX	1	1	Seconds
TIME_ACC_PRIORITY	1		
LOCATION_METHOD	1		

POS_REQ_ID Position request identifier

This is a number in the range of 0 to 255 for the SLC to identify the position response (or measurements) with the associated request.

NUM_FIXES Number of requested MS position (fixes).

The CP shall set this field to the number of "MS Position" messages it requires the CP to send back. If the number is set to 0, SLC shall send MS position continuously to CP. If NUM_FIXES is 1, TIME_BTW_FIXES shall be ignored.

TIME_BTW_FIXES Time elapsed between fixes.

The CP shall set this field to the minimum time between two consecutive fixes of the NUM_FIXES sequence triggered by this request, in second units, in the range from 0 to 255 seconds. The number 0 is for one fix case. The time is minimized in the sense that if the tracking is temporary lost during the sequence of fixes, the time between two consecutive fixes can be larger than TIME_BTW_FIXES to give time to the receiver to reacquire satellites and resume the position fixes delivery. The Advanced Power Management (APM) can also affect the actual time between fixes.

HORI_ERROR_MAX Maximum requested horizontal error.

The CP shall set this field to the maximum requested horizontal position error, in unit of 1 meter. The value of 0x00 indicates "No Maximum". The range of HORI_ERROR_MAX is from 1 meter to 255 meters.

The SLC shall try to provide a position with horizontal error less than this specified value in more than 95% of the cases.

DRAFT



One Socket Protocol ICD

This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

Table 6: Vertical Error

Values	Position Error (in meters)
0x00	<1meter
0x01	<5 meters
0x02	<10 meters
0x03	<20 meters
0x04	<40 meters
0x05	<80 meters
0x06	<160 meters
0x07	No Maximum
0x08 – 0xFF	Reserved

VERT_ERROR_MAX Maximum requested vertical error.

The CP shall set this field to the maximum requested vertical position error according to Table 6. The SLC shall try to provide a position with vertical error less than this specified value in more than 95% of the cases.

Note: The Position Request OSP message and the APM request message both specify QoS parameters and time between fixes. The APM request overrides the Position Request parameter values. When switching to and from APM to another mode, a previously issued multiple fix Position Request might be still in progress. The fixes overlapping the APM validity period will have the APM parameters; the ones outside of the APM validity period will have the Position Request parameters.

RESP_TIME_MAX Maximum response time

The CP shall set this field to the maximum requested response time, as an unsigned binary, in seconds. The value '0' is reserved "for no time limit"

TIME_ACC_PRIORITY Time/accuracy priority.

To indicate no time-limit for a fix, **MAX_RESP_TIME** shall be set to 0. If **RESP_TIME_MAX** and **HERRMAX/VERRM** conditions are contradicting each other, this field determines which one should have the priority. This field shall be coded according to Table 7.

Table 7: Time/Accuracy Priority

TIME_ACC_PRIORITY	Description
0x00	No priority imposed
0x01	RESP_TIME_MAX has priority over HORI_ERROR_MAX/VERT_ERROR_MAX
0x02	HORI_ERROR_MAX/VERT_ERROR_MAX has priority over RESP_TIME_MAX
0x03 – 0xFF	Reserved

LOCATION_METHOD GPS Location Method

The CP shall set this field according to the requested location method (see Table 8).

DRAFT


 <p>SiRF A CSR plc Company</p>	<h2>One Socket Protocol ICD</h2> <div style="border: 2px solid red; padding: 5px; display: inline-block; margin: 10px 0;"> <p>This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control.</p> </div> <p>Revision 5.5 11/16/2009</p>
--	--

Table 8: LOCATION_METHOD Definition

LOCATION_METHOD	Description
0x00	MS Assisted
0x01	MS Based
0x02	MS Based is preferred, but MS Assisted is allowed
0x03	MS Assisted is preferred, but MS Based is allowed
0x04	Simultaneous MS Based and MS Assisted
All others	Reserved

5.2 Set Ionospheric Model

MID (Hex)	0xD3
MID (Dec)	211
Message Name in Code	MID_SET_AIDING
SID (Hex)	0x01
SID (Dec)	1
SID Name in Code	SET_IONO

Table 9: Set Ionospheric Model message

Field	Bytes	Scale	Unit
Message ID	1		
Message Sub ID	1		
ALPHA_0	8 ⁽¹⁾	2 ⁻³⁰	Seconds
ALPHA_1	8 ⁽¹⁾	2 ⁻²⁷	sec/semi-circles
ALPHA_2	8 ⁽¹⁾	2 ⁻²⁴	sec/(semi-circles) ²
ALPHA_3	8 ⁽¹⁾	2 ⁻²⁴	sec/(semi-circles) ³
BETA_0	8 ⁽¹⁾	2 ¹¹	Seconds
BETA_1	8 ⁽¹⁾	2 ¹⁴	sec/semi-circles
BETA_2	8 ⁽¹⁾	2 ¹⁶	sec/(semi-circles) ²
BETA_3	8 ⁽¹⁾	2 ¹⁶	sec/(semi-circles) ³

ALPHA_0 Ionosphere correction parameter α_0 .

The CP shall set this field to the value contained in the associated parameter of the specified GPS ephemeris.

ALPHA_1 Ionosphere correction parameter α_1 .

The CP shall set this field to the value contained in the associated parameter of the specified GPS ephemeris.

 <p>SiRF A CSR plc Company</p>	<h2>One Socket Protocol ICD</h2> <div style="border: 2px solid red; padding: 5px; display: inline-block; margin: 10px 0;"> <p>This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control.</p> </div> <p>Revision 5.5 11/16/2009</p>
--	--

ALPHA_2 Ionosphere correction parameter α_2 .

The CP shall set this field to the value contained in the associated parameter of the specified GPS ephemeris.

ALPHA_3 Ionosphere correction parameter α_3 .

The CP shall set this field to the value contained in the associated parameter of the specified GPS ephemeris.

BETA_0 Ionosphere correction parameter β_0 .

The CP shall set this field to the value contained in the associated parameter of the specified GPS ephemeris.

BETA_1 Ionosphere correction parameter β_1 .

The CP shall set this field to the value contained in the associated parameter of the specified GPS ephemeris.

BETA_2 Ionosphere correction parameter β_2 .

The CP shall set this field to the value contained in the associated parameter of the specified GPS ephemeris.

BETA_3 Ionosphere correction parameter β_3 .


5.3 Set Satellite Ephemeris and Clock Corrections

MID (Hex) 0xD3
MID (Dec) 211
Message Name in Code MID_SET_AIDING
SID (Hex) 0x02
SID (Dec) 2
SID Name in Code SET_EPH_CLOCK

Table 10: Set Satellite Ephemeris and Clock Corrections message

Field	Bytes	Scale	Unit
Message ID	1		
Message Sub ID	1		
NUM SVS	1		
The structure of ephemeris parameters below shall repeat for the number of times indicated in the "NUM SVS" field.			
EPH_FLAG	8	N/A	N/A
SV_PRN_NUM	8	N/A	N/A
URA_IND	8	N/A	N/A
IODE	8	N/A	N/A
C_RS	16 ⁽¹⁾	2 ⁻⁵	Meters

DRAFT

 SiRF <small>A CSR plc Company</small>	One Socket Protocol ICD
	<div style="border: 2px solid red; padding: 5px; display: inline-block;"> This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control. </div> Revision 5.5 11/16/2009

Field	Bytes	Scale	Unit
DELTA_N	16 ⁽¹⁾	2 ⁻⁴³	semi-circles/sec
M0	32 ⁽¹⁾	2 ⁻³¹	semi-circles
C_UC	16 ⁽¹⁾	2 ⁻²⁹	Radians
ECCENTRICITY	32	2 ⁻³³	N/A
C_US	16 ⁽¹⁾	2 ⁻²⁹	Radians
A_SQRT	32	2 ⁻¹⁹	\sqrt{meters}
TOE	16	2 ⁴	Seconds
C_IC	16 ⁽¹⁾	2 ⁻²⁹	Radians
OMEGA_0	32 ⁽¹⁾	2 ⁻³¹	semi-circles
C_IS	16 ⁽¹⁾	2 ⁻²⁹	Radians
ANGLE_INCLINATION	32 ⁽¹⁾	2 ⁻³¹	semi-circles
C_RC	16 ⁽¹⁾	2 ⁻⁵	Meters
OMEGA	32 ⁽¹⁾	2 ⁻³¹	semi-circles
OMEGADOT	32 ⁽¹⁾	2 ⁻⁴³	semi-circles/sec
IDOT	16 ⁽¹⁾	2 ⁻⁴³	semi-circles/sec
TOC	16	2 ⁴	Seconds
T_GD	8 ⁽¹⁾	2 ⁻³¹	Seconds
AF2	8 ⁽¹⁾	2 ⁻⁵⁵	sec/sec ²
AF1	16 ⁽¹⁾	2 ⁻⁴³	sec/sec
AF0	32 ⁽¹⁾	2 ⁻³¹	Seconds

NUM_SVS Number of satellites

This is the number of satellites for which satellite ephemeris and clock corrections are being given with this message.

EPH_FLAG Ephemeris parameter validity flag.

The CP shall set this field to 1 if the following fields from SV_PRN_NUM to AF0 are valid broadcast ephemeris parameters.

If those fields are not valid, The CP shall set this field and the following fields from SV_PRN_NUM to AF0 to 0. This field shall be set to 0 if ephemeris parameters are not present in this AI3 message. The client shall keep its internal ephemeris data in this case.

The CP shall set this field to 2 if the following fields from SV_PRN_NUM to AF0 are valid synthesized ephemeris parameters (ephemeris extension).

For an unhealthy SV ("SV health" is not equal to 0), a separate UNHEALTHY_SAT_FLAG section might be included.

Other values are interpreted as follows

Bit 5 (Bit 0 is LSB) represents the type of ephemeris extension (EE). The value of 0 represents server-based EE, and the value of 1 represents client-based EE.

Bit 0 to Bit 4 represents the age of EE.

The value of 2 represents valid ephemeris extension of age of 1-day.

The value of 3 represents valid ephemeris extension of age of 2-day.

CS-129291-DC2	© SiRF Technology, Inc., a member of the CSR plc group of companies 2009 This material is subject to SiRF's non-disclosure agreement.	Page 34 of 251
---------------	--	----------------

DRAFT



This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

The value of 4 represents valid ephemeris extension of age of 3-day.
 The value of 5 represents valid ephemeris extension of age of 4-day.
 The value of 6 represents valid ephemeris extension of age of 5-day.
 The value of 7 represents valid ephemeris extension of age of 6-day.
 The value of 8 represents valid ephemeris extension of age of 7-day.
 For example: 0x22 represents a client-based ee of age 1, while 0x02 represents a server-based ee of age 1.

SV_PRN_NUM Satellite PRN number.

The CP shall set this field to the value of the PRN number for which the ephemeris is valid. It is represented as an unsigned binary value in the range from 1 to 32.

URA_IND User range accuracy index.

The CP shall set this field to the URA index of the SV. The URA index is an integer in the range of 0 through 15 and has the following relation to the URA of the SV.

Table 11: URA coding

URA Index	URA (meters)
0	$0.00 < URA \leq 2.40$
1	$2.40 < URA \leq 3.40$
2	$3.40 < URA \leq 4.85$
3	$4.85 < URA \leq 6.85$
4	$6.85 < URA \leq 9.65$
5	$9.65 < URA \leq 13.65$
6	$13.65 < URA \leq 24.00$
7	$24.00 < URA \leq 48.00$
8	$48.00 < URA \leq 96.00$
9	$96.00 < URA \leq 192.00$
10	$192.00 < URA \leq 384.00$
11	$384.00 < URA \leq 768.00$
12	$768.00 < URA \leq 1536.00$
13	$1536.00 < URA \leq 3072.00$
14	$3072.00 < URA \leq 6144.00$
15	$6144.00 < URA$ (or no accuracy prediction is available)

IODE Issue of data.

The CP shall set this field to the value contained in the associated parameter of the specified GPS ephemeris.

C_RS Amplitude of the sine harmonic correction term to the orbit radius.

The CP shall set this field to the value contained in the associated parameter of the specified GPS ephemeris.

DRAFT

 <p>SiRF A CSR plc Company</p>	One Socket Protocol ICD <div style="border: 2px solid red; padding: 5px; display: inline-block; margin: 10px 0;">This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control.</div> Revision 5.5 11/16/2009
---	--

DELTA_N Mean motion difference from the computed value.

The CP shall set this field to the value contained in the associated parameter of the specified GPS ephemeris.

M0 Mean anomaly at the reference time.

The CP shall set this field to the value contained in the associated parameter of the specified GPS ephemeris.

C_UC Amplitude of the cosine harmonic correction term to the argument of latitude.

The CP shall set this field to the value contained in the associated parameter of the specified GPS ephemeris.

ECCENTRICITY Eccentricity.

The CP shall set this field to the value contained in the associated parameter of the specified GPS ephemeris.

C_US Amplitude of the sine harmonic correction term to the argument of latitude.

The CP shall set this field to the value contained in the associated parameter of the specified GPS ephemeris.

A_SQRT Square root of the semi-major axis.

The CP shall set this field to the value contained in the associated parameter of the specified GPS ephemeris.

TOE Ephemeris reference time.

The CP shall set this field to the value contained in the associated parameter of the specified GPS ephemeris.

The SLC shall accept the associated parameter if

1. The internal ephemeris has an TOE (let's call it int_TOE) that is in the past when compared to this TOE
2. int_TOE is in the future when compared to this TOE, and $((\text{TOE} * 16) \bmod 3600) \neq 0$.

C_IC Amplitude of the cosine harmonic correction term to the angle of inclination.

The CP shall set this field to the value contained in the associated parameter of the specified GPS ephemeris.

OMEGA_0 Longitude of ascending node of orbit plane at weekly epoch.

The CP shall set this field to the value contained in the associated parameter of the specified GPS ephemeris.

CS-129291-DC2	© SiRF Technology, Inc., a member of the CSR plc group of companies 2009 This material is subject to SiRF's non-disclosure agreement.	Page 36 of 251
---------------	--	----------------

DRAFT

DRAFT

 <p>SiRF A CSR plc Company</p>	One Socket Protocol ICD <div style="border: 2px solid red; padding: 5px; display: inline-block; color: red; font-weight: bold;">This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control.</div> Revision 5.5 11/16/2009
---	---

C_IS Amplitude of the sine harmonic correction term to the angle of inclination.

The CP shall set this field to the value contained in the associated parameter of the specified GPS ephemeris.

ANGLE_INCLINATION Inclination angle at reference time.

The CP shall set this field to the value contained in the associated parameter of the specified GPS ephemeris.

C_RC Amplitude of the cosine harmonic correction term to the orbit radius.

The CP shall set this field to the value contained in the associated parameter of the specified GPS ephemeris.

OMEGA Argument of perigee.

The CP shall set this field to the value contained in the associated parameter of the specified GPS ephemeris.

OMEGADOT Rate of right ascension.

The CP shall set this field to the value contained in the associated parameter of the specified GPS ephemeris.

IDOT Rate of inclination angle.

The CP shall set this field to the value contained in the associated parameter of the specified GPS ephemeris.

TOC Clock data reference time.

The CP shall set this field to the value contained in the associated parameter of the specified GPS ephemeris.

T_GD L1 and L2 correction term.

The CP shall set this field to the value contained in the associated parameter of the specified GPS ephemeris.


AF2 Apparent satellite clock correction a_{f2} .

The CP shall set this field to the value contained in the associated parameter of the specified GPS ephemeris.

AF1 Apparent satellite clock correction a_{f1} .

The CP shall set this field to the value contained in the associated parameter of the specified GPS ephemeris.

DRAFT

 <p>SiRF A CSR plc Company</p>	<h2>One Socket Protocol ICD</h2> <div style="border: 2px solid red; padding: 5px; display: inline-block; margin: 10px 0;"> <p>This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control.</p> </div> <p>Revision 5.5 11/16/2009</p>
--	--

AF0 Apparent satellite clock correction a_{f0} .

The CP shall set this field to the value contained in the associated parameter of the specified GPS ephemeris.

5.4 Set Almanac Assist Data

MID (Hex)	0xD3
MID (Dec)	211
Message Name in Code	MID_SET_AIDING
SID (Hex)	0x03
SID (Dec)	3
SID Name in Code	SET_ALM

Table 12: Set Almanac Assist Data message

Field	Length (nr of bits)	Scale	Unit
Message ID	8		
Message Sub ID	8		
ALM_WEEK_NUM	16	N/A	N/A
NUM_SVS	8		
The structure below of almanac parameters shall repeat a number of times indicated by the "NUM_SVS" field.			
ALM_VALID_FLAG	8	N/A	N/A
ALM_SV_PRN_NUM	8	N/A	N/A
ALM_ECCENTRICITY	16	2^{-21}	dimensionless
ALM_TOA	8	2^{12}	Seconds
ALM_DELTA_INCL	$16^{(1)}$	2^{-19}	semi-circles
ALM_OMEGADOT	$16^{(1)}$	2^{-38}	semi-circles/sec.
ALM_A_SQRT	24	2^{-11}	meters ^{1/2}
ALM_OMEGA_0	$24^{(1)}$	2^{-23}	semi-circles
ALM_OMEGA	$24^{(1)}$	2^{-23}	semi-circles
ALM_M0	$24^{(1)}$	2^{-23}	semi-circles
ALM_AF0	$16^{(1)}$	2^{-20}	Seconds
ALM_AF1	$16^{(1)}$	2^{-38}	sec/sec

ALM_WEEK_NUM The GPS week number of the almanac.

This field shall be equal to the 10 least significant bits of the GPS week number of the almanac. The range for this field is from 0 to 1024.

NUM_SVS Number of satellites

This is the number of satellites for which almanac assistance is being given with this message.

ALM_VALID_FLAG Almanac validity flag.

This field shall be set to 1 if the following fields from ALM_SV_PRN_NUM to ALM_AF1 are valid.

CS-129291-DC2	© SiRF Technology, Inc., a member of the CSR plc group of companies 2009 This material is subject to SiRF's non-disclosure agreement.	Page 38 of 251
---------------	--	----------------

DRAFT



One Socket Protocol ICD

This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

If those fields are not valid, The CP shall set this field and the following fields from ALM_SV_PRN_NUM to ALM_AF1 to 0. For a sub-almanac which is not present (i.e. not due to bad health of the SV, but due to the absence of aiding data), ALM_VALID_FLAG shall be set to 0 (0x00). In this case, the client shall preserve the sub-almanac it has in its memory without overwriting it with the sub-almanac data in this message.

ALM_SV_PRN_NUM The satellite PRN number.

This field shall set to the value of the SV PRN number for which the almanac is valid. It is represented as an unsigned value in the range from 1 to 32.

ALM_ECCENTRICITY Eccentricity

This field shall be set to the value contained in the associated parameter of the specified GPS almanac.

ALM_TOA The reference time of the almanac.

This field shall be set to specify the reference time of the almanac, its unit is 4096 seconds.. Its valid range is from 0 to 602,112 seconds.

ALM_DELTA_INCL Delta inclination

This field shall be set to the value contained in the associated parameter of the specified GPS almanac.

ALM_OMEGADOT Rate of right ascension.

This field shall be set to the value contained in the associated parameter of the specified GPS almanac.

ALM_A_SQRT Square root of the semi-major axis

This field shall be set to the value contained in the associated parameter of the specified GPS almanac.

ALM_OMEGA_0 Longitude of ascending node of orbit plane at weekly epoch

This field shall be set to the value contained in the associated parameter of the specified GPS almanac.

ALM_OMEGA Argument of perigee

This field shall be set to the value contained in the associated parameter of the specified GPS almanac.

ALM_M0 Mean anomaly at reference time

This field shall be set to the value contained in the associated parameter of the specified GPS almanac.

ALM_AF0 Apparent satellite clock correction a_{f0}

This field shall be set to the value contained in the associated parameter of the specified GPS almanac

ALM_AF1 Apparent satellite clock correction a_{f1}

This field shall be set to the value contained in the associated parameter of the specified GPS almanac.

DRAFT

	One Socket Protocol ICD	
	This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control .	Revision 5.5 11/16/2009

5.5 Set Acquisition Assistance Data

MID (Hex)	0xD3
MID (Dec)	211
Message Name in Code	MID_SET_AIDING
SID (Hex)	0x04
SID (Dec)	4
SID Name in Code	SET_ACQ_ASSIST

Table 13: Set Acquisition Assistance Data message

Field	Bytes	Scale	Unit
Message ID	8		
Message Sub ID	8		
REFERENCE_TIME	32	0.001	Seconds
NUM_SVS	8		
The acquisition assistance parameters structure below shall repeat a number of times indicated by the NUM_SVS field.			
ACQ_ASSIST_VALID_FLAG	8	N/A	N/A
SV_PRN_NUM	8		
DOPPLER0	16 ⁽¹⁾	2.5	Hz
DOPPLER1	8 ⁽¹⁾	1/64	Hz/s
DOPPLER_UNCERTAINTY	8		(See Table 14)
SV_CODE_PHASE	16	1	Chips
SV_CODE_PHASE_INT	8	1	Milliseconds
GPS_BIT_NUM	8		
CODE_PHASE_UNCERTAINTY	16	1	Chips
AZIMUTH	16	1	Degrees
ELEVATION	8	1	Degrees

REFERENCE_TIME GPS Time Reference for Acquisition Assistance Data

The CP shall set this field to the GPS seconds since the beginning of the current GPS week at which the acquisition assistance data is valid, in binary format, in units of 1/1000 seconds, in the range from 0s to 604,799.999 seconds.

NUM_SVS Number of satellites
This is the number of satellites for which acquisition assistance data is being set with this message.

ACQ_ASSIST_VALID_FLAG Acquisition Assistance Data Validity Flag.

The CP shall set this field to 1 if the following fields from SV_PRN_NUM to ELEVATION are valid. If those fields are not valid, The CP shall set this field and the following fields from SV_PRN_NUM to ELEVATION to 0.

SV_PRN_NUM Satellite PRN Number

The CP shall set this field to the value of the PRN number for which acquisition assistance data is valid. It is represented as an unsigned binary value in the range from 1 to 32, where the binary value of the field conveys the satellite PRN number.



This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

DOPPLER0 The 0th Order Doppler

The CP shall set this field to the two's complement value of the 0th order Doppler, in units of 2.5 Hz, in the range from -5,120 Hz to 5,120 Hz. The CP shall set this field to 0xF7FF (decimal -2049) if the 0th order Doppler is unknown.

DOPPLER1 The 1st Order Doppler

The CP shall set this field to the two's complement value of the 1st order Doppler, in units of 1/64 Hz/s. The valid value is from -1 Hz/s to +1 Hz/s. The CP shall set this field to 0xBF (decimal -65) if the 1st order Doppler is unknown.

DOPPLER_UNCERTAINTY The Doppler Uncertainty

The CP shall set this field to represent the Doppler uncertainty as specified in Table 14.

Table 14: DOPPLER_UNCERTAINTY Field

DOPPLER_UNCERTAINTY Value	Doppler Uncertainty
'00000000'	200 Hz
'00000001'	100 Hz
'00000010'	50 Hz
'00000011'	25 Hz
'00000100'	12.5 Hz
'00000101' – '11111110'	Reserved
'11111111'	Doppler uncertainty is unknown

SV_CODE_PHASE Code Phase

The CP shall set this field to the code phase in units of 1 C/A code chip. The valid range is from 0 to 1022 Chips. The offset is specified in reference to the current millisecond boundary.

SV_CODE_PHASE_INT The Integer Number of C/A Code Periods That Have Elapsed Since The Latest GPS Bit Boundary

The CP shall set this field to the number of the C/A code periods that have elapsed since the latest GPS bit boundary, in units of C/A code period (1 ms). The valid range is from 0 to 19.

GPS_BIT_NUM The Two Least Significant Bits of The Bit Number (Within The GPS Frame) Being Currently Transmitted

The CP shall set this field to represent the two least significant bits of the bit number being received at REFERENCE_TIME. The valid range is from 0 to 3.

CODE_PHASE_UNCERTAINTY Code Phase Uncertainty

The CP shall set this field to the value of the code phase uncertainty, in units of 1 C/A code chip. The valid range is from 0 to 1023 chips.



This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

AZIMUTH Azimuth Angle of the GPS Satellite

The CP shall set this field to the azimuth, in units of 1 degree. The valid value is from 0 to 359 degrees. The CP shall set this field to 0xFFFF if the azimuth angle is unknown.

ELEVATION Elevation Angle of the GPS Satellite

The CP shall set this field to the elevation angle, in units of 1 degree. The valid value is from -90 to 90 degrees. The CP shall set this field to 0xFF if the elevation angle is unknown

5.6 Set Real-Time Integrity

MID (Hex) 0xD3
 MID (Dec) 211
 Message Name in Code MID_SET_AIDING
 SID (Hex) 0x05
 SID (Dec) 5
 SID Name in Code SET_RT_INTEG

Table 15: Set Real-Time Integrity message

Field	Bytes	Scale	Unit
Message ID	1		
Message Sub ID	1		
UNHEALTHY_SAT_INFO	4		

UNHEALTHY_SAT_INFO Information on unhealthy satellite

This is a 32 bit field to indicate which satellite is unhealthy. Bit 0 corresponds to satellite PRN number 1, and Bit 31 corresponds to satellite PRN number 32. An unhealthy satellite is indicated by setting the corresponding bit to 1; if the bit is zero, the satellite is considered healthy by the aiding source. If a satellite is considered unhealthy, the SLC shall not use it for search nor position computation. For all position modes the SLC shall try to collect satellite health information on its own. SLC shall use the latest satellite health information (either from OSP messages or from self collection). If this information is never received by the SLC during a session, SLC shall use its internal information.

5.7 OSP ACK/NACK/ERROR Notification

MID (Hex) 0xD8
 MID (Dec) 216
 Message Name in Code MID_MSG_ACK_IN
 SID (Hex) 0x01
 SID (Dec) 1
 SID Name in Code ACK_NACK_ERROR

There were no existing messages for autonomous ACK/NACK input, therefore this message is intended for both autonomous and aided cases. For the autonomous case, certain fields are not applicable and will be zeroed out.


 <p>SiRF A CSR plc Company</p>	<h2>One Socket Protocol ICD</h2> <div style="border: 2px solid red; padding: 5px; display: inline-block; margin: 10px 0;"> This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control. </div> <p>Revision 5.5 11/16/2009</p>
--	---

Table 16: ACK/NACK/ERROR NOTIFICATION message

Field	Bytes	Scale	Unit
Message ID	1		
Message Sub ID	1		
Echo Message ID	1		
Echo Message Sub ID	1		
ACK/NACK/ERROR	1		
Reserved	2		

Table 17: ACK/NACK/ERROR Field Description

Value	Description
0x00	Acknowledgement
0x01 – 0xF9	Reserved
0xFA	Message ID and/or Message Sub ID not recognized
0xFB	Parameters cannot be understood by the recipient of the message
0xFC	OSP Revision Not Supported
0xFD	CP doesn't support this type of NAV bit aiding (0 during autonomous operation)
0xFE	CP doesn't accept ephemeris status response (0 during autonomous operation)
0xFF	Non-acknowledgement

5.8 Ephemeris Status Request

MID (Hex)	0xD4
MID (Dec)	212
Message Name in Code	MID_STATUS_REQ
SID (Hex)	0x01
SID (Dec)	1
SID Name in Code	EPH_REQ

Table 18: Ephemeris Status Request message

Field	Bytes	Scale Factor	Unit
Message ID	1		
Message Sub ID	1		

5.9 Almanac Request

MID (Hex)	0xD4
MID (Dec)	212
Message Name in Code	MID_STATUS_REQ
SID (Hex)	0x02
SID (Dec)	2
SID Name in Code	ALM_REQ


 SiRF <small>A CSR plc Company</small>	One Socket Protocol ICD
	<div style="border: 2px solid red; padding: 5px; display: inline-block;"> This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control. </div> Revision 5.5 11/16/2009

Table 19 Almanac Request message

Field	Bytes	Scale Factor	Unit
Message ID	1		
Message Sub ID	1		

5.10 Set UTC Model

MID (Hex)	0xD3
MID (Dec)	211
Message Name in Code	MID_SET_AIDING
SID (Hex)	0x06
SID (Dec)	6
SID Name in Code	SET_UTC_MODEL

Table 20: Set UTC Model message

Field	Length (nr of bits)	Scale	Unit
Message ID	8		
Message Sub ID	8		
R_A0	32	$2^{-30(2)}$	seconds
R_A1	32(24) ⁽¹⁾	$2^{-50(2)}$	sec/sec
R_DELTA_TLS	8	1	seconds
R_T_OT	8	$2^{12(2)}$	seconds
R_WN_T	8	1	weeks
R_WN_LSF	8	1	weeks
R_DN	8	1	days
R_DELTA_T_LSF	8	1	seconds

R_A0	Constant term of polynomial (raw) The CP shall set this field to the value contained in the associated parameter of the UTC data.
R_A1	The first order term of polynomial (raw) The CP shall set this field to the value contained in the associated parameter of the UTC data.
R_DELTA_TLS	Delta time due to leap seconds (raw) The CP shall set this field to the value contained in the associated parameter of the UTC data.
R_T_OT	Reference time for UTC Data (raw) The CP shall set this field to the value contained in the associated parameter of the UTC data.
R_WN_T	UTC reference week number (raw) The CP shall set this field to the value contained in the associated parameter of the UTC data.
R_WN_LSF	Week number at which the scheduled future or recent past leap second becomes effective (raw) The CP shall set this field to the value contained in the associated parameter of the UTC data.
R_DN	Day number at the end of which the scheduled future or recent past leap second becomes effective (raw) The CP shall set this field to the value contained in the associated parameter of the UTC data.
R_DELTA_T_LSF	Delta time due to the scheduled future or recent past leap second (raw) The GPS Data Center shall set this field to the value contained in the associated parameter of the UTC data.



This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

5.11 Set GPS TOW Assist

MID (Hex) 0xD3
 MID (Dec) 211
 Message Name in Code MID_SET_AIDING
 SID (Hex) 0x07
 SID (Dec) 7
 SID Name in Code SET_GPS_TOW_ASSIST

Table 21: Set GPS TOW Assist message

Field	Length (nr of bits)	Scale	Unit
Message ID	8		
Message Sub ID	8		
NUM_SVS	8		
The structure below of GPS TOW assistance parameters shall repeat a number of times indicated by the NUM_SVS field.			
TOW_ASSIST_SV_PRN_NUM	8	N/A	N/A
TLM_MSG	16(14)	N/A	N/A
TOW_ASSIST_INFO	8(1+1+2)	N/A	N/A (this field contains the "Anti-Spoof", "Alert" and the "TLM Reserved" parameters)

NUM_SVS Number of satellites
 This is the number of satellites for which GPS TOW assistance data is being given with this message.

TOW_ASSIST_SV_PRN Satellite PRN Number
 PRN number of the satellite that the GPS_TOW_ASSIST information belongs to. The value 0 indicates that the corresponding GPS_TOW_ASSIST parameters are not valid.

TLM_MSG Telemetry work
 Telemetry word broadcast by the specified satellite.

TOW_ASSIST_INFO Additional TOW Assist Information
 Bit 3 corresponds to the 1 bit "Anti-Spoof" parameter broadcast by the specified satellite.
 Bit 2 corresponds to the 1 bit "Alert" parameter broadcast by the specified satellite.
 Bit 1-0 (LSB) corresponds to the 2 bit "TLM Reserved" parameter broadcast by the specified satellite.

5.12 Set Auxiliary Navigation Model Parameters

MID (Hex) 0xD3
 MID (Dec) 211
 Message Name in Code MID_SET_AIDING
 SID (Hex) 0x08
 SID (Dec) 8
 SID Name in Code SET_AUX_NAV



This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

Table 22: Set Auxiliary Navigation Model Parameters message

Field	Length (nr of bits)	Scale	Unit
Message ID	8		
Message Sub ID	8		
NUM_SVS	8		
The structure of auxiliary navigation model parameters below shall repeat a number of times as indicated by the "NUM_SVS" field above.			
NAVMODEL_SV_PRN_NUM	8		
NAVMODEL_TOE	16	$2^{(2)}$	seconds
NAVMODEL_IODC	16(10) ⁽¹⁾	N/A	N/A
NAVMODEL_SF1_L2_INFO	8(2+1) ⁽¹⁾	N/A	N/A (this field contains the "C/A or P on L2" and the "L2 P Data Flag" parameters)
NAVMODEL_SF1_SV_HEALTH	8(6) ⁽¹⁾	N/A	N/A
NAVMODEL_SF1_RESERVED	88(87) ⁽¹⁾	N/A	N/A
NAVMODEL_SF2_AODO_FIT_INTERVAL	8(1+5)	N/A	N/A (this field contains the "AODO" and the "Fit Interval Flag" parameters)

- (1) The number in parentheses indicates the actual number of bits of the parameter. If multiple parameters are included in a field, the number of bits for each parameter are connected by the "+" sign.
- (2) The detailed description of each parameter can be found in ICD GPS 200C.

NUM_SVS Number of satellites
This is the number of satellites for which auxiliary navigation model parameters are being given with this message.


NAVMODEL_SV_PRN_NUM Satellite ID number for the NAVMODEL
PRN number of the satellite that the NAVMODEL belongs to. The value 0 indicates that the corresponding NAVMODEL parameters are not valid.

NAVMODEL_TOE Time of Ephemeris of the NAVMODEL
This is the TOE of the corresponding NAVMODEL.
The SLC shall accept the associated parameter if

- The internal NavModel parameters has an TOE (let's call it int_TOE) that is in the past when compared to this NAVMODEL_TOE
- int_TOE is in the future when compared to NAVMODEL_TOE, and $((TOE * 16) \bmod 3600) \neq 0$.

NAVMODEL_IODC Issue of Data, Clock of the NAVMODEL
This is the 10 bit IODC that corresponds to the ephemeris of the specified satellite.

NAVMODEL_SF1_L2_INFO
Bits 2 and 1 correspond to the 2 bit "C/A or P on L2" found in bits 71 and 72 of subframe 1 of the specified satellite's navigation message.

 <p>SiRF A CSR plc Company</p>	<h2>One Socket Protocol ICD</h2> <div style="border: 2px solid red; padding: 5px; display: inline-block; margin: 10px 0;"> <p style="color: red; font-size: small;">This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control.</p> </div> <p>Revision 5.5 11/16/2009</p>
--	--

Bit 0 (LSB) corresponds to the 1 bit “L2 P Data Flag” found in bit 91 of subframe 1 of the specified satellite’s navigation message.

NAVMODEL_SF1_SV_HEALTH
Bits 5 to 0 (LSB) correspond to the 6 bit “SV Health” found in subframe 1 of the specified satellites’ navigation message.

NAVMODEL_SF1_RESERVED
The LSB 7 bits of the first byte and the entire next 10 bytes correspond to the 87 reserved bits found in subframe 1 of the specified satellites’ navigation message. The MSB valid bit in the first byte is transmitted from the satellite first.

NAVMODEL_SF2_AODO_FIT_INTERVAL
Bit 5 corresponds to the 1 bit “Fit Interval Flag” found subframe 2 of the specified satellite’s navigation message.
Bits 4 to 0 (LSB) correspond to the 5 bit “AODO” found subframe 2 of the specified satellite’s navigation message.

5.13 Broadcast Ephemeris Request

MID (Hex)	0xD4
MID (Dec)	212
Message Name in Code	MID_STATUS_REQ
SID (Hex)	0x03
SID (Dec)	3
SID Name in Code	B_EPH_REQ

Table 23: Broadcast Ephemeris Request message

Field	Bytes	Scale Factor	Unit
Message ID	1		
Message Sub ID	1		
EPH_RESP_TRIGGER	2	N/A	N/A
NUM_SVS	1		
The following fields are repeated a number of times as indicated by the value of the NUM_SVS field above.			
EPH_INFO_FLAG	1	N/A	N/A
SV_PRN_NUM	1	N/A	N/A
GPS_WEEK	2	N/A	N/A
TOE	2	16	Seconds

EPH_RESP_TRIGGER Broadcast Ephemeris Response Message Trigger(s)

This field is designed to specify how the Broadcast Ephemeris Response Message(s) should be triggered with the following definition.

Bit 0 (LSB) 1 = output the available broadcast ephemeris once if the available broadcast ephemeris is newer than the one specified by valid GPS_WEEK and TOE (EPH_INFO_FLAG = 1). When GPS_WEEK and TOE are not valid (EPH_INFO_FLAG = 0), output the available broadcast ephemeris once



This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

Bit 1 1 = output broadcast ephemeris according to rules specified in Bit 0, then output broadcast ephemeris only when the broadcast ephemeris is updated (not necessarily changed)

Bit 2 1 = output broadcast ephemeris according to rules specified in Bit 0, then output broadcast ephemeris only when the broadcast ephemeris is changed

Bit 3 to Bit 15 (MSB) Reserved

Only 1 out of the following three bits - Bit 0, Bit 1 and Bit 2 - may be set at one time.

NUM_SVS Number of satellites
This is the number of satellites for which broadcast ephemeris is being requested with this message.

EPH_INFO_FLAG Broadcast Ephemeris Information Validity Flag

This field should be set to 1 if the following fields from SV_PRN_NUM to TOE are valid. This field should be set to 0 if the following fields from SV_PRN_NUM to TOE are NOT valid.

SV_PRN_NUM Satellite PRN Number

This field should be set to the value of the PRN number for which the broadcast ephemeris information is valid. It is represented as an unsigned binary value in the range from 1 to 32. When EPH_INFO_FLAG is set to 0, this field should be set to 0.

GPS_WEEK Broadcast Ephemeris Reference Week

This field should be set to the value of GPS week number of the broadcast ephemeris. When EPH_INFO_FLAG is set to 0, this field should be set to 0.

TOE Broadcast Ephemeris Reference Time

This field should be set to the value of TOE of the broadcast ephemeris. When EPH_INFO_FLAG is set to 0, this field should be set to 0.

5.14 Session Opening Request

MID (Hex) 0xD5
MID (Dec) 213
Message Name in Code MID_SESSION_CONTROL_REQ
SID (Hex) 0x01
SID (Dec) 1
SID Name in Code SESSION_OPEN_REQ

Table 24: Session Opening Request message

Field	Bytes	Scale	Unit
Message ID	1		
Message Sub ID	1		
SESSION_OPEN_REQ_INFO	1		

DRAFT



One Socket Protocol ICD

This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

SESSION_OPEN_REQ_INFO: Session open request information.

This field shall be set to an appropriate value as specified in Table 25.

Table 25: SESSION_OPEN_REQ_INFO

Value	Description
0x00 to 0x70	Reserved
0x71	Session opening request
0x72 to 0x7F	Reserved
0x80	Session resume requested
0x81 to 0xFF	Reserved

5.15 Client Status Request

MID (Hex)	0xD4
MID (Dec)	212
Message Name in Code	MID_STATUS_REQ
SID (Hex)	0x06
SID (Dec)	6
SID Name in Code	CLIENT_STATUS_REQ

Table 26: Client Status Request message

Field	Bytes	Scale Factor	Unit
Message ID	1		
Message Sub ID	1		

5.16 Test Mode Configuration Request

This message already exists from SSB and is being kept as is. Since it is a previously existing message and is untouched by the conversion of SSB->OSP, it is not documented in this manual. Details of MID and SID are mentioned here for reference.

Table 27: Existing Test Mode Config Request MID and SID

MID (hex)	MID (dec)	MID Name	SID (hex)	SID (dec)	SID Name
0xE8	232	MID_SSB_EE_INPUT	0xFF	255	SSB_EE_DEBUG

Message details can be found in this document:

http://sirfcentral/sites/devops/SiRFLocServerAndLocationServicesPlatformDevelopment/Project%20SysEng/EASGEE_CLM_GPS_TOO_draft.doc

5.17 Tx Blanking Request

MID (Hex)	0xD4
MID (Dec)	212
Message Name in Code	MID_STATUS_REQ
SID (Hex)	0x09

CS-129291-DC2	© SiRF Technology, Inc., a member of the CSR plc group of companies 2009 This material is subject to SiRF's non-disclosure agreement.	Page 49 of 251
---------------	--	----------------

DRAFT

DRAFT



One Socket Protocol ICD

This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

SID (Dec)
SID Name in Code

9
TX_BLANKING_REQ

CSR Confidential - Not for external distribution

DRAFT

DRAFT

 SiRF A CSR plc Company	One Socket Protocol ICD	
	This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control.	Revision 5.5 11/16/2009

Table 28: Tx Blanking Request message

Field	Bytes	Scale	Unit
Message ID	1		
Message Sub ID	1		
COMMAND	1		
AIR_INTERFACE	1		
MODE	1		
Reserved	4		

COMMAND Message Command

The valid values are either "0" or "1". The value "0" represent a command to start Tx Blanking, the value "1" represents a command to stop Tx Blanking.

AIR_INTERFACE Air interface

This parameter indicates the air interface for which the SLC should perform the Tx blanking for. The value is "0", which represent the GSM air interface. All other values are currently invalid.

MODE Tx Blanking Mode

This parameter indicates Tx Blanking Mode the receiver should do.

Table 29: MODE Field Specification (for GSM)

Values	Description
0x00	1 Slot Blanking
0x01	2 Slot Blanking
0x02 to 0xFF	Reserved

5.18 Channel Load Query

MID (Hex)	0xD4
MID (Dec)	212
Message Name in Code	MID_STATUS_REQ
SID (Hex)	0x05
SID (Dec)	5
SID Name in Code	CH_LOAD_REQ

Table 30: Channel Load Query message

Field	Bytes	Scale	Unit
Message ID	1		
Message Sub ID	1		
PORT	1		
MODE	1		

PORT Serial Port A or B

The CP shall set this field to the port number it wants to query the load. "0" represents the SiRF port A and "1" represents SiRF port B. Any other value has no meaning.

MODE Response Mode

The CP shall set this field according to Table 31. If the periodic mode is enabled, the Channel load response shall be output once per second.

CS-129291-DC2	© SiRF Technology, Inc., a member of the CSR plc group of companies 2009 This material is subject to SiRF's non-disclosure agreement.	Page 51 of 251
---------------	--	----------------

DRAFT

 <p>SiRF A CSR plc Company</p>	<p>One Socket Protocol ICD</p> <div style="border: 2px solid red; padding: 5px; display: inline-block;"> <p>This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control.</p> </div> <p>Revision 5.5 11/16/2009</p>
--	---

Table 31: MODE Field Specification

Values	Description
0x00	Turn off sending periodic message ⁽¹⁾
0x01	Turn on sending periodic message ⁽²⁾
0x02	Send message just once
0x03 to 0xFF	Reserved

⁽¹⁾: No specific acknowledge nor further Channel Load Response message shall be sent after reception of this message.

⁽²⁾: periodic response is sent every second.

5.19 Serial Port Setting Request

MID (Hex)	0xD4
MID (Dec)	212
Message Name in Code	MID_STATUS_REQ
SID (Hex)	0x08
SID (Dec)	8
SID Name in Code	SERIAL_SETTINGS_REQ

This MID is from an existing SSB message which has been modified to include the superset of fields using from the previous analogous SSB and AI3 messages.

Table 32: Serial Port Setting Request Message

Field	Bytes	Scale	Unit
Message ID	1		
Message Sub ID	1		
BAUD_RATE	4		
DATA_BITS	1		
STOP_BIT	1		
PARITY	1		
PORT	1		
Reserved	1		

BAUD_RATE

The CP shall set this field to the desired baud rate. The current baud rates that are supported are 4800, 9600, 19200, 38400, 57600, and 115200. Any other value is illegal and is not supported. The Baud rate shall be coded as its equivalent binary value.

Example 1: "4800 bps" shall be coded as "000012C0" in hexadecimal equivalent.

Example 2: "115200bps" shall be coded "0001C200" in hexadecimal equivalent.

Warning note for 4e: Operation at speeds below 38400 carries risk of dropped messages when using SGEE.

DATA_BITS

Represents how many data bits are used per character.

STOP_BIT

Stop bit length. For example, 1 = 1 stop bit.

CS-129291-DC2	© SiRF Technology, Inc., a member of the CSR plc group of companies 2009 This material is subject to SiRF's non-disclosure agreement.	Page 52 of 251
---------------	--	----------------

DRAFT

 <p>SiRF A CSR plc Company</p>	<p style="text-align: right;">One Socket Protocol ICD</p> <div style="border: 2px solid red; padding: 5px; display: inline-block;"><p>This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control.</p></div> <p style="text-align: right;">Revision 5.5 11/16/2009</p>
---	---

CSR Confidential - Not for external distribution

DRAFT

DRAFT

	One Socket Protocol ICD
	Revision 5.5 11/16/2009

This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

PARITY None = 0, Odd = 1, Even = 2

PORT Serial Port A or B
 The CP shall set this value to the port number that is being configured. "0" represents the port A and "1" represents the port B. Any other value has no meaning.

5.20 Software Version Request

MID (Hex) 0x84
 MID (Dec) 132
 Message Name in Code MID_PollSWVersion

Table 33: Software Version Request message

Field	Bytes	Scale	Unit
Message ID	U1		
Control	U1		

The 'Control' field has a value of 0 and it is not used. The only purpose of it is backward compatibility with the SSB "Poll Software Version" message.

5.21 Reject

MID (Hex) 0xD8
 MID (Dec) 216
 Message Name in Code MID_MSG_ACK_IN
 SID (Hex) 0x02
 SID (Dec) 2
 SID Name in Code REJECT

Table 34: Reject message

Field	Bytes	Scale	Unit
Message ID	1		
Message Sub ID	1		
REJ_MESS_ID	1		
REJ_MESS_SUB_ID	1		
REJ_REASON	1		

REJ_MESS_ID Message ID of Rejected Message
 REJ_MESS_ID Message Sub ID of Rejected Message
 REJ_REASON Reject Reason

DRAFT



This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

Table 35: "REJ_REASON" field Description

Bit Number	Bit Value	Description
Bit 1 (LSB)	"1" true "0" false	(Reserved)
Bit 2	"1" true "0" false	Not Ready
Bit 3	"1" true "0" false	Not Available
Bit 4	"1" true "0" false	Wrongly formatted message(1)
Bit 5	"1" true "0" false	No Time Pulse during Precise Time Transfer
Bit 6		Unused
Bit 7-8	"0"	Reserved

5.22 Time_Frequency_Approximate_Position Status Request

MID (Hex) 0xD4
MID (Dec) 212
Message Name in Code MID_STATUS_REQ
SID (Hex) 0x04
SID (Dec) 4
SID Name in Code TIME_FREQ_APPROX_POS_REQ

Table 36: Time_Frequency_Approximate_Position Status Request message

Field	Bytes	Scale	Unit
Message ID	1		
Message Sub ID	1		
REQ_MASK	1		

REQ_MASK Request mask

- Bit 0 (LSB): {0,1} => {Time status not requested, Time (gps week number and tow) status requested}
- Bit 1 (LSB): {0,1} => {Time accuracy status not requested, Time accuracy status requested}
- Bit 2: {0,1} => {Frequency status not requested, Frequency status requested}
- Bit 3: {0,1} => {ApproximatePosition status not requested, ApproximatePosition status requested}



This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

5.23 Approximate MS Position Response

MID (Hex)	0xD7
MID (Dec)	215
Message Name in Code	MID_AIDING_RESP
SID (Hex)	0x01
SID (Dec)	1
SID Name in Code	APPROX_MS_POS_RESP

The "Approximate MS Position Response" message is output in response to "Approximate MS Position Request" message.

Table 37: Approximate MS Position Response message

Field	Bytes	Scale	Unit
Message ID	1		
Message Sub ID	1		
LAT	4		
LON	4		
ALT	2		
EST_HOR_ER	1		
EST_VER_ER	2		
USE_ALT_AIDING	1		

LAT Approximate MS Latitude

The CP shall set this field to the Approximate MS Latitude in units of $180/2^{32}$ degrees in a range from -90 degrees to $+90 \times (1-2^{-31})$ degrees

LON Approximate MS Longitude

The CP shall set this field to the Approximate MS Longitude in units of $360/2^{32}$ degrees in a range from -180 degrees to $+180 \times (1-2^{-31})$ degrees.

ALT Approximate MS Altitude

The CP shall set this field to the approximate MS altitude in units of 0.1 meters in the range of -500 meters to $+6053.5$ meters, in Unsigned Binary Offset coding. The formula to apply is:

$$ALT(\text{in m}) = B \times 0.1 - 500$$


where B is the unsigned binary value of the "ALT" field from 0 to 65535. "all zeros" represents -500m , "all ones" represents $+6053.5\text{m}$.

EST_HOR_ER Estimated Horizontal Error

The CP shall set this field using the estimated error in the Approximate MS location. The error shall correspond to radius of the maximum search domain the CP requires the SLC to search and shall be encoded according to Table 38.

Table 38: "EST_HOR_ER" field Description

Exponent X	Mantissa Y	Index value I = Y + 16 X	Floating Point Value f_i	Estimated Horizontal Error (meters)
0000	0000	0	24	< 24
0000	0001	1	25.5	$24 \leq \sigma < 25.5$
X	Y	$2 \leq I \leq 253$	$24 \cdot (1 + Y/16) \cdot 2^X$	$f_{i-1} \leq \sigma < f_i$
1111	1110	254	1474560	$1425408 \leq \sigma < 1474560$
1111	1111	255	Not Applicable	≥ 1474560

 <p>SiRF A CSR plc Company</p>	<h2>One Socket Protocol ICD</h2> <div style="border: 2px solid red; padding: 5px; display: inline-block; margin: 10px 0;"> <p style="color: red; font-size: small;">This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control.</p> </div> <p>Revision 5.5 11/16/2009</p>
--	--

EST_VER_ER Estimated Vertical Error
 The CP shall set this field using the estimated vertical error in the Approximate MS location. The error shall correspond to the standard deviation of the error in MS altitude in units of 0.1 meters in the range of 0 meters to 6553.5 meters, in Unsigned Binary Offset coding. The formula to apply is:

$$EST_VER_ER \text{ (in m)} = V \times 0.1$$

where V is the unsigned binary value of the "EST_VER_ER" field from 0 to 65535. "all zeros" represents 0m, "all ones" represents +6553.5m.

USE_ALT_AIDING Use Altitude Aiding
 If the least significant bit of this byte is 1 then the altitude aiding is to be used, otherwise not.

5.24 Frequency Transfer Response

MID (Hex)	0xD7
MID (Dec)	215
Message Name in Code	MID_AIDING_RESP
SID (Hex)	0x03
SID (Dec)	3
SID Name in Code	FREQ_TX_RESP

The "Frequency Transfer Response" message is output in response to "Frequency Transfer Request" message.

Note: the frequency offset returned in this message is the CP clock error from the nominal value, scaled to the GPS L1 frequency; it is not the SLC clock error.

Table 39: Frequency Transfer Response message

Field	Bytes	Scale	Unit
Message ID	1		
Message Sub ID	1		
SCALED_FREQ_OFFSET	2		
REL_FREQ_ACC	1		
TIME_TAG	4		
REF_CLOCK_INFO	1		
NOMINAL_FREQ	5 This field is presented only if Bit 4 of REF_CLOCK_INFO is '1'		

SCALED_FREQ_OFFSET: SCALED_Frequency Offset (in Hz)
 The CP shall set the bits in this field equal to the relative frequency difference between the theoretical and the real value of the CP clock, multiplied by the L1 frequency (1575.42 Mhz), in units of Hertz. If the theoretical value is higher than the real one, the value shall have a positive sign. The range of values shall be from -2^{14} Hz to $+2^{14}-1$ Hz. The encoding shall be in two's complement.
 Example: if the nominal CP clock is 10Mhz, and the real CP clock frequency is 9.999975Mhz, the relative frequency difference is +2.5ppm, and the value of the SCALED_FREQ_OFFSET field is: $2.5e-6 \cdot 1575.42e6 = 3938.6$ Hz which shall be rounded to the closest integer number of Hz, and coded as 0x0F63.



This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

REL_FREQ_ACC: Relative Frequency Offset Accuracy

The CP shall set this field based on the estimated accuracy of the frequency offset.

Note 1: the SLC only guarantees to search in a domain just large enough to encompass the search uncertainty engendered by the REL_FREQ_ACC field, but not beyond. It is CP's responsibility to choose this field value large enough.

Note 2: The REL_FREQ_ACC is one-sided: the SLC shall consider that the actual scaled frequency lies in the interval between "SCALED_FREQ_OFFSET - REL_FREQ_ACCxL1" and "SCALED_FREQ_OFFSET+ REL_FREQ_ACCxL1" where L1=1575.42 MHz.

The encoding shall be according to Table 40.

Table 40: "REL_FREQ_ACC" Field Description

Exponent X	Mantissa Y	Index value I= Y + 16 X	Floating Point Value f_i	Accuracy (ppm)
0000	0000	0	0.00390625	< 0.00390625
0000	0001	1	0.004150390625	$0.00390625 < \sigma < 0.004150390625$
X	Y	$2 \leq I \leq 253$	$0.00390625 (1 + Y/16) \times 2^X$	$f_{i-1} \leq \sigma < f_i$
1111	1110	254	240	$232 \leq \sigma < 240$
1111	1111	255	Not Applicable	≥ 240

TIME_TAG: Time Tag of the measurement contents of the Frequency response message

The CP shall set this field to the time of the beginning of the period over which the contents of this message are valid. The time tag shall be seconds elapsed since the beginning of the current GPS week in Unsigned Binary coding of 32bits. The resolution of the time tag message will be 1ms. When time tag is not available (in the case where precise time transfer did not precede frequency transfer), the CP shall set the TIME_TAG field as follows.

- Set to 0xFFFFFFFF indicates that the contents of the message are valid from the time of reception forward and will not change until notified with another Frequency Response message. Note the CP must ensure that the clock is on and stable prior to sending the Frequency Transfer Response message with the TIME_TAG field set to 0xFFFFFFFF.
- Set to 0xFFFFFFFF to inform the SLC that this message is invalid.

Note: The rollover of the GPS_WEEK_NUM will be handled by SLC.

REF_CLOCK_INFO: Reference clock information for frequency transfer message

This is used to provide additional information about the clock used.



This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

Table 41: REF_CLOCK_INFO Field Definition

Bits in REF_CLOCK_INFO	Description
Bit 1 (LSB)	Bit1 = 0 implies that this frequency transfer message is related to the reference clock input to the counter (and thus use of counter method) Bit1 = 1 implies that this frequency transfer message is related to the SLC clock
Bit 2	Valid only if the frequency transfer method is counter Bit 2 = 0: Reference clock is on Bit 2 = 1: Reference clock is off
Bit 3	Valid only if the frequency transfer method is counter Bit 3 = 0: Don't request to turn off reference clock Bit 3 = 1: Request to turn off reference clock
Bit 4	Bit 4 = 0: NOMINAL_FREQ field is not included in this message Bit 4 = 1: NOMINAL_FREQ field is included in this message
Bit 5 to Bit 8	Reserved

NOMINAL_FREQ Nominal CP Frequency

The CP shall set this field to the absolute frequency value of the clock derived from CP by division and delivered to the SLC for counter frequency measurement. The resolution is in 10^{-3} Hz. The format is unsigned binary over 40 bits. The range is from 0.001Hz to 1.0995GHz. Otherwise, the CP shall set this field to all '0's.

5.25 Time Transfer Response

MID (Hex)	0XD7
MID (Dec)	215
Message Name in Code	MID_AIDING_RESP
SID (Hex)	0x02
SID (Dec)	2
SID Name in Code	TIME_TX_RESP

The "Time Transfer Response" message is output in response to "Time Transfer Request" message.

Depending on the hardware configuration, this message can be returned along with a hardware timing pulse ("Precise Time Transfer" mode) or without hardware timing pulse ("Coarse Time Transfer" mode). The SLC will know which case is implemented by checking the "HW_CONFIG" field in the "Hardware Configuration Response" message.

Given the high resolution of the GPS_TIME field, the timing pulse can be sent any time convenient for the CP, provided the GPS_TIME is reported in the "Time Transfer Response" Message consistently.

Table 42: Time Transfer Response message

Field	Bytes	Scale	Unit
Message ID	1		
Message Sub ID	1		
TT_TYPE	1		
GPS_WEEK_NUM	2		
GPS_TIME	5		
DELTAT UTC	3		
TIME_ACCURACY	1		



This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

TT_TYPE Time Transfer Type
If the "Coarse Time Transfer" method is used, this field shall be set to all '0's. If the "Precise Time Transfer" method is used, this field shall be set to all '1's.

GPS_WEEK_NUM GPS Week Number
The GPS Week Number is the absolute Week number and not rolled over to Modulo 1024. The GPS shall set this field to the value of the current GPS Week Number

GPS_TIME: GPS Time
The SLC shall set this field to the time of the week in Units of 1 microsecond. This time shall be the GPS time valid at the preceding time pulse (for "Precise Time Transfer" mode), or at the time of the transmission of the message (for "Coarse Time Transfer" mode). The values range from 0 to 604800 seconds.

DELTAT.UTC GPS Time to UTC Time Correction
Correction in milliseconds to apply to the full GPS time (counted from GPS zero time point) to get UTC time from same zero time point. The formula to apply is: $T_{UTC} = T_{GPS} - DELTAT_UTC$. The format is in two's complement, in units of 1ms, in the range from -8388.608 seconds to +8388.607 seconds.

TIME_ACCURACY Time Transfer Accuracy
The CP shall set this field equal to the estimated accuracy of the time in this message. This field will be used to set the maximum search domain the SLC will search.

Note 1: the SLC only guarantees to search in a domain just large enough to encompass the search uncertainty engendered by the TIME_ACCURACY field, but not beyond. It is CP's responsibility to choose this field value large enough.

Note 2: The TIME_ACCURACY is one-sided: the SLC shall consider that the actual GPS time lies in the interval between "GPS_TIME - TIME_ACCURACY" and "GPS_TIME + TIME_ACCURACY".

If the "Coarse Time Transfer" is used (see TT_TYPE field), this field shall be in units of 1 milliseconds and encoded as per Table 43.

If the "Precise Time Transfer" is used (see TT_TYPE field), this field shall be in units of 1 microsecond and encoded as per Table 44.

Table 43: "TIME_ACCURACY" field description-"Coarse Time Transfer" method

Exponent X	Mantissa Y	Index value I= Y + 16 X	Floating Point Value f_i	Accuracy (Milliseconds)
0000	0000	0	1.0	< 1.0
0000	0001	1	1.0625	$1.0 < \sigma < 1.0625$
X	Y	$2 \leq I \leq 253$	$1.0 (1 + Y/16) \times 2^X$	$f_{i-1} \leq \sigma < f_i$
1111	1110	254	61440	$59392 \leq \sigma < 61440$
1111	1111	255	Not Applicable	≥ 61440

 SiRF <small>A CSR plc Company</small>	<h2 style="margin: 0;">One Socket Protocol ICD</h2> <div style="border: 2px solid red; padding: 5px; margin: 10px auto; width: fit-content;"> <p style="font-size: small; margin: 0;">This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control.</p> </div>	<p style="margin: 0;">Revision 5.5 11/16/2009</p>
--	---	---

Table 44: "TIME_ACCURACY" field description-"Precise Time Transfer" method

Exponent X	Mantissa Y	Index value I= Y + 16 X	Floating Point Value f_i	Accuracy (Microseconds)
0000	0000	0	0.125	< 0.125
0000	0001	1	0.1328125	$0.125 < \sigma < 0.1328125$
X	Y	$2 \leq I \leq 253$	$0.125 (1 + Y/16) \times 2^x$	$f_{i-1} \leq \sigma < f_i$
1111	1110	254	7680	$7424 \leq \sigma < 7680$
1111	1111	255	Not Applicable	≥ 7680

5.26 Push Aiding Availability

MID (Hex)	0xD3
MID (Dec)	211
Message Name in Code	MID_SET_AIDING
SID (Hex)	0x09
SID (Dec)	9
SID Name in Code	SET_AIDING_AVAIL

Table 45: Push Aiding Availability message

Field	Bytes	Scale	Unit
Message ID	1		
Message Sub ID	1		
AIDING_AVAILABILITY_MASK	1		
FORCED_AIDING_REQ_MASK	1		
EST_HOR_ER	1		
EST_VER_ER	2		
REL_FREQ_ACC	1		
TIME_ACCURACY_SCALE	1		
TIME_ACCURACY	1		
SPARE	2		

AIDING_AVAILABILITY_MASK Mask to indicate the type of aiding available

- Bit 0=1: Position aiding accuracy has improved, EST_HOR_ER and EST_VER_ER are valid;
- Bit 0=0: Position aiding status has not changed
- Bit 1=1: Frequency aiding available, REL_FREQ_ACC valid;
- Bit 1=0: Frequency aiding status has not changed
- Bit 2=1: Time aiding available, TIME_ACCURACY valid;
- Bit 2=0: Time aiding status has not changed

The SLC may or may not request for aiding based on this availability mask. Once the aiding response is sent to the SLC, the SLC may not use the new aiding if the uncertainty level of the new aiding is not as good as SLC's internal information.

FORCED_AIDING_REQ_MASK Mask to indicate the type of aiding that the CP would like to force the SLC to re-request

- Bit 0=1: Position aiding source has changed, SLC shall re-request for new aiding;
- Bit 1=1: Frequency aiding source has changed, SLC shall re-request for new aiding;
- Bit 2 = 1: SLC shall re-request for new time aiding



This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

- This mask indicates the type(s) of aiding that the SLC shall request again. The SLC shall re-request regardless of the uncertainty level of the new aiding, but shall accept and use the aiding response only if the uncertainty is better than what the SLC has internally when the SLC is not navigating.
- When the SLC is navigation, the SLC may accept the aiding with better uncertainty. For example, if SLC is navigating with a 2D-position with no GPS week number, when a forced time and position aiding re-request comes in, the SLC shall request for time and position (using Time Transfer Request and Approximate MS Position Request). The SLC will only accept and use the GPS week number, and the height information in the new aiding. However, if the SLC is navigating with full knowledge of time, when a forced time aiding comes in, the SLC will request for time aiding, but it will not use the new time aiding.

EST_HOR_ER and EST_VER_ER

These parameters have the same definitions as the ones in Table 38.

REL_FREQ_ACC

This parameter has the same definition as the ones in Table 40.

TIME_ACCURACY_SCALE

scale factor for the time accuracy

This represents the scale factor used to encode the time accuracy.

TIME_ACCURACY_SCALE = 0 => time_scale = 1.0

TIME_ACCURACY_SCALE = 1 => time_scale = 0.125

TIME_ACCURACY_SCALE = 0xFF => time accuracy unknown

All other values are reserved.

TIME_ACCURACY

time accuracy

This is the time accuracy of the aiding.

If time_scale (obtained from TIME_ACCURACY_SCALE) is 1.0, Table 43 shall be used to get the time accuracy.

If time_scale (obtained from TIME_ACCURACY_SCALE) is 0.125, Table 44 shall be used to get the time accuracy.

A value of 0xFF means "unknown accuracy"

5.27 Hardware Configuration Response

MID (Hex) 0xD6

MID (Dec) 214

Message Name in Code MID_HW_CONFIG_RESP

The "Hardware Configuration Response" message is output by the CP after startup when receives the hardware config request message from the SLC. After each startup and the hardware config request message is received, a "Hardware Configuration Response" message should be sent.

Table 46: Hardware Configuration Response message

Field	Bytes	Scale	Unit
Message ID	1		
HW_CONFIG	1		
NOMINAL_FREQ	5		
NW_ENHANCE_TYPE	1		

DRAFT

 <p>SiRF A CSR plc Company</p>	<h2>One Socket Protocol ICD</h2> <div style="border: 2px solid red; padding: 5px; display: inline-block; margin: 10px 0;"> <p>This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control.</p> </div> <p>Revision 5.5 11/16/2009</p>
---	--

HW_CONFIG: Hardware configuration information.

This field shall be set to an appropriate value as specified in Table 47.

Table 47: HW_CONFIG Field Specification

Bits in HW_CONFIG	Value	CONFIGURATION
Bit 1(LSB)	0: No 1: Yes	Precise Time Transfer Availability ⁽¹⁾
Bit 2	0: CP → SLC 1: CP ↔ SLC	Precise Time Transfer direction between CP and SLC
Bit 3	0: No 1: Yes	Frequency Transfer Availability
Bit 4	1: No Counter 0: Counter	Frequency Transfer Method
Bit 5	1: Yes 0: No	RTC Availability
Bit 6	1: Internal to GPS 0: External to GPS	RTC for GPS
Bit 7	0: No 1: Yes	Coarse Time Transfer Availability ⁽¹⁾
Bit 8	0: Reference clock is on 1: Reference clock is off	Valid only if Bit 4 is '0' Reference Clock Status for "Counter" type Frequency Transfer

(1) : Either "Precise Time Transfer" or "Coarse Time Transfer" can be available for a hardware configuration, but not both simultaneously.

NOMINAL_FREQ Nominal CP Frequency

If, in HW_CONFIG Bit 3 is set to '1' and Bit 4 is set to '0' (counter method), the CP shall set this field to the absolute frequency value of the clock derived from CP by division and delivered to the SLC for counter frequency measurement. The resolution is in 10^{-3} Hz. The format is unsigned binary over 40 bits. The range is from 0.001Hz to 1.0995GHz. Otherwise, the CP shall set this field to all '0's.

NW_ENHANCE_TYPE Network Enhancement Type

The CP shall use this field to inform the SLC which network enhanced features are available.

Table 48: NW_ENHANCE_TYPE Definition

NW_ENHANCE_TYPE	Description
Bit 0	Reserved
Bit 1	Reserved
Bit 2	0 = AUX_NAVMODEL Aiding is NOT supported 1 = AUX_NAVMODEL Aiding is supported
Bit 3	0 = NAVBit Subframe 1, 2, and 3 Aiding is NOT supported 1 = NAVBit Subframe 1, 2, and 3 Aiding is supported
Bit 4	0 = NavBit Subframe 4 and 5 Aiding is NOT supported 1 = NavBit Subframe 4 and 5 Aiding is supported
Bit 5	Reserved

DRAFT



This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

NW_ENHANCE_TYPE	Description
Bit 6	Reserved
Bit 7	Reserved

Note: Network providers tend to support these enhancement types consistently in their coverage zone. Therefore, it is sufficient to specify the supported types at the initial configuration time here. When roaming into a different provider's network seamlessly in a single navigation session, the support configuration might change. If the new network does not support certain types that were originally declared as supported in the NW_ENHANCE_TYPE field here, the change becomes visible in the first position Navbit request response message if the SLC requested it.

5.28 Session Closing Request

MID (Hex)	0xD5
MID (Dec)	213
Message Name in Code	MID_SESSION_CONTROL
SID (Hex)	0x02
SID (Dec)	2
SID Name in Code	SESSION_CLOSE_REQ

Table 49: Session Closing Request message

Field	Bytes	Scale	Unit
Message ID	1		
Message Sub ID	1		
SESSION_CLOSE_REQ_INFO	1		

SESSION_CLOSE_REQ_INFO: Session closing request information.
This field shall be set to an appropriate value as specified in Table 50.

Table 50: SESSION_CLOSE_REQ_INFO

Value	Description
0x00	Session Closing requested
0x01 to 0x7F	Reserved
0x80	Session Suspend requested
0x81 to 0xFF	Reserved

5.29 OSP Revision Request

MID (Hex)	0xD4
MID (Dec)	212
Message Name in Code	MID_STATUS_REQ
SID (Hex)	0x07
SID (Dec)	7
SID Name in Code	OSP_REV_REQ

Table 51: OSP Revision Request message

Field	Bytes	Scale Factor	Unit
Message ID	1		
Message Sub ID	1		



This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

5.30 Nav Subframe 1_2_3 Aiding Response Message

MID (Hex) 0xD7
 MID (Dec) 215
 Message Name in Code MID_AIDING_RESP
 SID (Hex) 0x04
 SID (Dec) 4
 SID Name in Code SET_NBA_SF1_2_3

This message is in response to the Nav Bit Aiding Request Message (“NBA_REQ”).

Table 52: Nav Subframe 1_2_3 Aiding Response Fields

Field	Length (bits)	Units
Message ID	8	
Message Sub ID	8	
NUM_SVS	8	
The following fields are repeated a number of times as specified by the value in the NUM_SVS field above.		
SUBF_1_2_3_FLAG	8	NA
SAT_PRN_NUM	8	NA
SUBF_1_2_3	904	NA

NUM_SVS Number of satellites

This is the number of satellites for which ephemeris status parameters are given by this message.

SUBF_1_2_3_FLAG Subframe 1, 2, and 3 Flag

If set to “0x00”, SAT_PRN_NUM and SUBFRAME_1_2_3 fields are invalid and must be set to zero. If set to “0x01”, SAT_PRN_NUM and SUBFRAME_1_2_3 fields are valid.

SAT_PRN_NUM Satellite PRN number

This field contains satellite PRN number for which SUBF_1_2_3 is valid. It is represented as an unsigned binary value in the range from 1 to 32, where the binary value of the field conveys the satellite PRN number.

SUBF_1_2_3 Subframe 1, 2 and 3

This field contains subframe 1, 2 and 3 of the navigation message bits for the satellite specified by SV_PRN_NUM, in that order transmitted by the satellite. The most significant bit of the first byte shall contain the first bit of Subframe 1. There should be 900 valid bits. Therefore, the least significant 4 bit of the last byte shall be set to 0's.

5.31 Nav Subframe 4_5 Aiding Response Message

MID (Hex) 0xD7
 MID (Dec) 215
 Message Name in Code MID_AIDING_RESP
 SID (Hex) 0x05
 SID (Dec) 5
 SID Name in Code SET_NBA_SF4_5

 <p>SiRF A CSR plc Company</p>	<h2>One Socket Protocol ICD</h2> <div style="border: 2px solid red; padding: 5px; display: inline-block; margin: 10px 0;"> <p>This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control.</p> </div> <p>Revision 5.5 11/16/2009</p>
--	--

This message is in response to the Nav Bit Aiding Request Message (“NBA_REQ”). There could be one or two such messages in response to a single NBA_REQ message, which will always request SF45 data for all satellites. Generally, a single SF45_data set applies for all satellites and then, a single response message carries the SF45 data for all satellites. But, at least one day of the week, there are two versions of the Almanac are being broadcast, each of them applicable to two disjunctive sets of satellites. In these cases there are two response messages, and the SAT_LINK bitmaps in them should complement one another to cover all satellites.

Table 53: Nav Subframe 4_5 Aiding Response Fields

Field	Length (bits)	Units
Message ID	8	
Message Sub ID	8	
SAT_LIST	32	
The following fields are repeated 25 times.		
FRAME_NUM	8	NA
SUBF_4_5	600	NA

SAT_LIST Satellite List

This is a bitmap representing the satellites for which SUBF_4_5 are valid. If SUBF_4_5 are valid for the satellite represented by a bit of this field, CP shall set that bit to ‘1’. The LSB (Bit 0) of this field represents satellite PRN number 1. The MSB (Bit 31) of this field represents satellite PRN 32.

Note: SAT_LIST include all satellites for which SUBF_4_5 in this message are valid, whether they were specified in the NBA_REQ Navbit aiding request message or not.

FRAME_NUM Frame number

This field shall be set to the frame number for which the data in SUBF_4_5 is valid for. The frame number is the GPS frame number, within the 12.5 minute of the GPS superframe. The value range is 1 to 25 where the binary value of the field conveys the GPS frame number. The CP shall set this field to 0 if the data in SUBF_4_5 is invalid.

SUBF_4_5 Subframe 4 and 5

This field contains subframe 4 and 5 of the navigation message bits in the order transmitted by the satellite. The most significant bit of the first byte shall contain the first bit of the subframe 4. There should be 600 valid bits.

5.32 Power Mode Request

This message is a pair with the Power Mode Response message.

MID (Hex)	0xDA
MID (Dec)	218
Message Name in Code	MID_PWR_MODE_REQ
SID (Hex)	Listed below
SID (Dec)	Listed below
SID Name in Code	Listed below



This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

Table 54: Power Mode Request SIDs

0x00	0	FP_MODE_REQ
0x01	1	APM_REQ
0x02	2	MPM_REQ
0x03	3	TP_REQ
0x04	4	PTF_REQ

APM_REQ Request to transition to Advanced Power Management mode
When sent in a full power mode, a direct transition is requested to the Advanced Power Management low power mode. When sent from any other low power mode, first a default transition is performed to full power mode and then, immediately a transition from the full power mode to the Advanced Power Management low power mode is performed. In either case, a single Power Mode Response message will confirm this message.

MPM_REQ Request to transition to Micro Power Management mode
When sent in a full power mode, a direct transition is requested to the Micro Power Management low power mode. When sent from any other low power mode, first a default transition is performed to full power mode and then, immediately a transition from the full power mode to the Micro Power Management low power mode is performed. In either case, a single Power Mode Response message will confirm this message.

ATP_REQ Request to transition to Trickle Power Management mode
When sent in a full power mode, a direct transition is requested to the Adaptive Trickle Power Management low power mode. When sent from any other low power mode, first a default transition is performed to full power mode and then, immediately a transition from the full power mode to the Adaptive Trickle Power Management low power mode is performed. In either case, a single Power Mode Response message will confirm this message.

PTF_REQ Request to transition to Push-To-Fix Power Management mode
When sent in a full power mode, a direct transition is requested to the Push-To-Fix Power Management low power mode. When sent from any other low power mode, first a default transition is performed to full power mode and then, immediately a transition from the full power mode to the Push-To-Fix Power Management low power mode is performed. In either case, a single Power Mode Response message will confirm this message.

FP_MODE_REQ Request to transition to Full Power mode
When sent in a any of the low power modes, the current low power mode is cancelled and a direct transition is requested to the full power mode.

The scope of this message and the rules of overriding other power mode setting values that may have already been stored are described in section 7.14.

The message description for each SID follows.

SID 0x00 (0) FP_MODE_REQ

Field	Bytes	Scale	Unit
Message ID	1		
Message Sub ID	1		

DRAFT



One Socket Protocol ICD

This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

When this message is received, any low power (LP) mode which is currently active is disabled and full power mode is entered.

SID 0x01 (1) APM REQ

Field	Bytes	Scale	Unit
Message ID	1		
Message Sub ID	1		
NUM_FIXES	1		
TBF	1		sec
POWER_DUTY_CYCLE	1	*0.2	%
MAX_HOR_ERR	1		
MAX_VERT_ERR	1		
PRIORITY	1		
MAX_OFF_TIME	4		msec
MAX_SEARCH_TIME	4		msec
TIME_ACC_PRIORITY	1		
Reserved	1		

NUM_FIXES Number of requested APM cycles
Valid range is 0-255. A value of 0 indicated that continuous APM cycles are requested. The default value is zero.

TBF Time between fixes
Requested time between fixes. 1 – 180sec. In SLC, if this value is equal or less than 10 sec, the **POWER_DUTY_CYCLE** parameter is disregarded and a trickle power mode is engaged where the TBF value also derives the “On Time” length, as shown in the table below:

Table 55: TBF Cycle Time Derived On Time Period Length

Time Between Fixes (sec)	On Time (msec)
1	300
2	400
3	400
4	400
5	500
6	600
7	700
8	800
9	900
10	900

DRAFT

DRAFT



One Socket Protocol ICD

This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

CSR Confidential - Not for external distribution

DRAFT



This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

POWER_DUTY_CYCLE Duty cycle of the APM mode
The CP shall set this field to the power duty cycle desired. The values in this field will range from 1 to 20. 1 shall represent a 5% duty cycle and 20 shall represent a 100%. The default value is 50%.

MAX_HOR_ERR Maximum requested horizontal error
The maximum requested horizontal position error, in unit of 1 meter. The value of 0x00 indicates "No Maximum". The range of **HORI_ERROR_MAX** is from 1 meter to 255 meters. The SiRF Client shall try to provide a position with horizontal error less than this specified value in more than 95% of the cases.

MAX_VERT_ERR Maximum requested vertical error
The maximum requested vertical position error according to the table below. The SiRF Client shall try to provide a position with vertical error less than this specified value in more than 95% of the cases.

Table 56: Maximum Vertical Error

Value	Position Error
0x00	< 1 meter
0x01	< 5 meters
0x02	< 10 meters
0x03	< 20 meters
0x04	< 40 meters
0x05	< 80 meters
0x06	<160 meters
0x07	No Maximum
0x08-0xFF	Reserved

PRIORITY Specifies if time or power duty has priority
0x01 = Time between two consecutive fixes has priority
0x02 = Power duty has higher priority
Bits 2-7 reserved for expansion

MAX_OFF_TIME Maximum time for sleep mode
Default value is 30s. When the receiver is unable to acquire satellites for a TP cycle, it returns to sleep mode for this period of time before it tries again.

MAX_SEARCH_TIME Maximum satellite search time
Default value is 120s. When the receiver is unable to reacquire at the start of a cycle, this parameter determines how long it will try to reacquire for. After this time expires, the unit returns to sleep mode for the value set in the **MAX_OFF_TIME** field. Entering a value of 0 for this field makes max search time disabled such that when the receiver attempts to reacquire continuously. When a value of 0 is entered for the **MAX_SEARCH_TIME**, the value entered in the **MAX_OFF_TIME** field is N/A and ignored.

TIME_ACC_PRIORITY Time/Accuracy Priority

0x00	No priority imposed (default)
0x01	MAX_SEARCH_TIME has higher priority
0x02	MAX_HOR_ERR has higher priority
0x03-0xFF	Reserved

DRAFT



One Socket Protocol ICD

This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

Reserved

Byte reserved for future use.

Note: The Position Request OSP message and the APM request message both specify QoS parameters and time between fixes. The APM request overrides the Position Request parameter values. When switching to and from APM to another mode, a previously issued multiple fix Position Request might be still in progress. The fixes overlapping the APM validity period will have the APM parameters; the ones outside of the APM validity period will have the Position Request parameters.

SID 0x02 (2) MPM REQ

Field	Bytes	Scale	Unit
Message ID	1		
Message Sub ID	1		
Reserved	4		

Reserved

Bytes reserved for future use

SID 0x03 (3) TP REQ

Field	Bytes	Scale	Unit
Message ID	1		
Message Sub ID	1		
DUTY_CYCLE	2	*10	%
ON_TIME	4		msec
MAX_OFF_TIME	4		msec
MAX_SEARCH_TIME	4		msec

DUTY_CYCLE

Percent time on

Desired time to be spent tracking with full power. A duty cycle of 1000 (100%) means continuous operation. When the duty cycle is set to 100% the on-time has no effect. The default value is 50%.

ON_TIME

Actual time on

The value range is 100 – 900 msec. When the cycle time is 1 second, ON_TIME should be specified as less than 700 ms. For any other cycle times, the ON_TIME field value should be specified as less than or equal to 900 ms. The TBF time is derived from the values specified here in the ON_TIME and in the DUTY_CYCLE fields. If the resulting TBF value is too low and not supported, the request is rejected with an error message. When the specified ON_TIME and DUTY_CYCLE values can not be enforced to get a fix, power management reverts back to full power mode, until the signal conditions improve again to meet the specified ON_TIME and DUTY_CYCLE values.

MAX_OFF_TIME

Maximum time for sleep mode


Default value is 30s. When the receiver is unable to acquire satellites for a TP cycle, it returns to sleep mode for this period of time before it tries again.

MAX_SEARCH_TIME

Maximum satellite search time

Default value is 120s. When the receiver is unable to reacquire at the start of a cycle, this parameter determines how long it will try to reacquire for. After this time expires, the unit returns to sleep mode for the value set in the MAX_OFF_TIME field. Entering a value of 0 for this field makes max search time disabled such that when the receiver attempts to reacquire continuously. When a value of 0 is entered for the MAX_SEARCH_TIME, the value entered in the MAX_OFF_TIME field is N/A and ignored.

DRAFT

 <p>SiRF A CSR plc Company</p>	<h2>One Socket Protocol ICD</h2> <div style="border: 2px solid red; padding: 5px; display: inline-block; color: red; font-size: small;"> This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control. </div> <p>Revision 5.5 11/16/2009</p>
--	---

Note: In trickle power mode, the parameters of this request may contradict with the similar parameters defined in the POS_REQ message. Therefore, the responses to the POS_REQ request may get suspended while in trickle power mode in which case only the MID 2 “Measure Navigation Data Out” SSB PVT messages are generated using TP mode.

SID 0x04 (4) PTF REQ

Field	Bytes	Scale	Unit
Message ID	1		
Message Sub ID	1		
PTF_PERIOD	4		sec
MAX_SEARCH_TIME	4		msec
MAX_OFF_TIME	4		msec

PTF_PERIOD Push-To-Fix cycle time in seconds
Default value is 1800s. Value range: 10 – 7200 sec.

MAX_SEARCH_TIME Maximum satellite search time
Default value is 120s. When the receiver is unable to reacquire at the start of a cycle, this parameter determines how long it will try to reacquire for. After this time expires, the unit returns to sleep mode for the value set in the PTF_PERIOD field. Entering a value of 0 for this field makes max search time disabled such that when the receiver attempts to reacquire continuously.

MAX_OFF_TIME Maximum time for sleep mode
The longest period in msec for which the receiver will deactivate due to the MAX_SEARCH_TIME time-out. When the receiver is unable to acquire satellites for a cycle, it returns to sleep mode for this period of time before it tries again. Default value is 30000ms. Value range: 1000 – 180000 msec.

Note: In push-to-fix power mode, the parameters of this request may contradict with the similar parameters defined in the POS_REQ message. Therefore, the responses to the POS_REQ request may get suspended while in trickle power mode in which case only the MID 2 “Measure Navigation Data Out” SSB PVT messages are generated using TP mode.

5.33 Query Request

The intent of this message is to query the receiver to determine what modes/settings are active. The first implementation has the query messaging for low power and full power, with the intent that in the future this function could be expanded to other messages.

MID (Hex) 0xD1
MID (Dec) 209
Message Name in Code MID_QUERY_REQ

Table 57: Query Request message fields

Field	Bytes	Scale	Unit
Message ID	1		
QUERY_MID	1		
QUERY_SID	1		

 <p>SiRF A CSR plc Company</p>	<h2>One Socket Protocol ICD</h2> <div style="border: 2px solid red; padding: 5px; display: inline-block; margin: 10px 0;"> <p>This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control.</p> </div> <p>Revision 5.5 11/16/2009</p>
---	--

QUERY_MID Message ID for query
Specifies which mode/setting is being queried.

QUERY_SID Sub ID for query
If a particular query requires that a SID be specified, it is in this field. Not all queries require a SID to be specified and therefore if a MID is sent where the SID does not matter, this field is ignored.

Query support is available only for the following MID/SIDs:

Table 58: Query message support

QUERY_MID	QUERY_SID	Description
218	Ignored	Determine if we are in a low power mode or full power.

5.34 Hardware Control Input

This message ID is reserved for future hardware control features, including VCTCXO and on/off signal configuration. Although two SIDs are specified in the master MID list, they are only placeholders to show which features would use this MID and there can be additions/subtractions to the

MID (Hex)	0xDB
MID (Dec)	219
Message Name in Code	MID_HW_CTRL_IN
SID (Hex)	TBD
SID (Dec)	TBD
SID Name in Code	TBD

Table 59: Hardware Control Input message

Field	Bytes	Scale	Unit
Message ID	1		
Message Sub ID	1		
Message details TBD			

 <p>SiRF A CSR plc Company</p>	<p>One Socket Protocol ICD</p> <div style="border: 2px solid red; padding: 5px; margin: 10px auto; width: fit-content;"> <p>This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control.</p> </div>	<p>Revision 5.5 11/16/2009</p>
--	--	------------------------------------

5.35 CW Configuration

CW Configuration message allows for control (enable/disable) of specific hardware and software features of the CW Controller. Scanning can be disabled or set to run the automatic scan progression as specified in the system design. Filtering can be disabled, forced to just the 2MHz filter or the OFFT notch filter, or set to automatic.

Table 60: CW Configuration Message Definition

MID (Hex)	0xDC
MID (Dec)	220
Message Name in Code	MID_CW_INPUT
SID (Hex)	0x01
SID (Dec)	1
SID Name in Code	CW_CONFIG

Table 61: CW Configuration Field Definitions

Field	Bytes	Unit	Description
Message ID	U1		Message ID (0xDC)
Sub ID	U1		Sub ID (0x01)
Configuration Mode	U1		Enumeration of configuration modes: 0: Enable scan, enable filtering 1: Enable scan, use OFFT 2: Enable scan, use 2MHz 3: Enable scan, no filter 4: Disable scan, disable filtering 254: Factory Scan (not for 4t, reserved only) 255: Disable scan, disable filtering. Use only complex 8f ₀ .


The SLC responds to this message with an ACK/NACK/ERROR 0x4B output message.

Notes: The MID 150 “Switch Operating Modes” message always overrides these configuration settings. This CW configuration message is received and processed only if the SLC is in “normal” operating mode as defined in the “Mode” field of the MID 150 message. The CW controller configuration settings are cleared ONLY through factory reset X₀ (Msg ID 128).

5.36 TCXO Learning Input

Table 62: TCXO Learning Input

Message Name	TCXO_LEARNING
Input or Output	Input
MID (Hex)	DD
MID (Dec)	221
Message Name in Code	MID_TCXO_LEARNING_IN
SID (Hex)	See below
SID (Dec)	See below
SID Name in Code	See below

 SiRF A CSR plc Company	One Socket Protocol ICD
	Revision 5.5 11/16/2009

This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Table 63: TCXO Learning Input SID Descriptions

Field Being Described		
SID Field	Description	Inclusion in Builds
0x00	Clock Model Test Output Control.	All builds
0x01	Clock Model Data Base	All builds
0x02	Clock Model TCXO Temperature Table	Xo Test Builds Only
0x03	Clock Model Test Mode Control	Xo Test Builds Only

Messages marked as “Xo Test Builds Only” in the above table are missing in standard builds for products to be shipped to customers. These messages are present in special test builds only made for the purpose of testing the TCXO features.

5.36.1 TCXO Learning Clock Model Output Control

Table 64: Clock Model Output Definition

Message Name	TCXO_LEARNING
Input or Output	Input
MID (Hex)	DD
MID (Dec)	221
Message Name in Code	MID_TCXO_LEARNING_IN
SID (Hex)	0x00
SID (Dec)	0
SID Name in Code	CLOCK_MODEL_OUTPUT_CONTROL

Table 65: Clock Model Output Message Field Definitions

Name	Bytes	Binary (Hex)		Unit	ASCII (Dec)		Description
		Scale	Example		Scale	Example	
Message ID	U1					221	TCXO Learning In
Sub ID	U1					0	Clock Model Output Control
							The following fields are Bit Masks for message 0x5D output enabling. The bit position corresponds to the sID for 0x5D where bit 0 = sID 0 If the sID is not defined it is ignored. All output can be disabled by setting both lists to 0.
One Time SID List	U2						One Time sID List
Continuous SID List	U2						Continuous sID List
Output	U2						Requested control for Output

DRAFT

	One Socket Protocol ICD				
	This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control .				

Request							sIDs. Bit 0: 0 = TRec Msg (0x5D,4) outputs current value only Bit 0: 1 = TRec Msg (0x5D,4) outputs all queued values
spare	U2						

5.36.2 TCXO Learning Clock Model Data Base Input

Table 66: Clock Model Data Base Input Message Definition

Message Name	TCXO_LEARNING
Input or Output	Input
MID (Hex)	DD
MID (Dec)	221
Message Name in Code	MID_TCXO_LEARNING_IN
SID (Hex)	0x01
SID (Dec)	1
SID Name in Code	CLOCK_MODEL_DATA_BASE

Table 67: Clock Model Data Base Input Message Field Definitions

Name	Bytes	Binary (Hex)		Unit	ASCII (Dec)		Description
		Scale	Example		Scale	Example	
Message ID	U1					221	TCXO Learning In
Sub ID	U1					1	Clock Model Data Base
Source	U1						Bit mask indicating source of the clock model. 0x0 = NOT_SET 0x1 = ROM 0x2 = DEFAULTS 0x4 = MFG 0x8 = TEST_MODE 0x10 = FIRST_NAV
Aging Rate Uncertainty	U1			Ppm/year	0.1	10	Aging rate of uncertainty
Initial Offset Uncertainty	U1			ppm	0.1	10	Initial Frequency offset of the TCXO
Spare1	U1						
Clock Drift	S4			ppb	1	60105	Clock drift
Temp Uncertainty	U2			ppm	0.01	50	Temperature uncertainty
Manufacturing Week Number	U2			GPS Week #	1	1465	TCXO Manufacturing week number in full GPS weeks
Spare2	U4						

CS-129291-DC2	© SiRF Technology, Inc., a member of the CSR plc group of companies 2009 This material is subject to SiRF's non-disclosure agreement.	Page 76 of 251
---------------	--	----------------

DRAFT

DRAFT

 <p>SiRF A CSR plc Company</p>	<h2>One Socket Protocol ICD</h2> <div style="border: 2px solid red; padding: 5px; display: inline-block; margin: 10px 0;"> <p>This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control.</p> </div> <p>Revision 5.5 11/16/2009</p>
--	--

5.36.3 TCXO Learning Temperature Table Input

This message is missing in standard builds for products to be shipped to customers, and present in special test builds only made for the purpose of testing the TCXO features.

Table 68: TCXO Learning Temperature Table Input Definition

Message Name	TCXO_LEARNING
Input or Output	Input
MID (Hex)	DD
MID (Dec)	221
Message Name in Code	MID_TCXO_LEARNING_IN
SID (Hex)	0x02
SID (Dec)	2
SID Name in Code	TEMPERATURE_TABLE

Table 69: TCXO Learning Temperature Table Input Field Definitions

Name	Bytes	Binary (Hex)		Unit	ASCII (Dec)		Description
		Scale	Example		Scale	Example	
Message ID	U1					221	TCXO Learning In
Sub ID	U1					2	TCXO Temperature Table
Counter	U4						Counter updates by 1 for each output. Rolls over on overflow.
Offset	S2			ppb	1	-331	Frequency offset bias of the table from the CD default
Global Min	S2			ppb	1	-205	Minimum XO error observed
Global Max	S2			ppb	1	442	Maximum XO error observed
First Week	U2			GPS Week #	1	1480	Full GPS week of the first table update
Last Week	U2			GPS Week #	1	1506	Full GPS week of the last table update
LSB	U2			Ppb	1	4	Array LSB Scaling of Min[] and Max[]
Aging Bin	U1				1	37	Bin of last update
Aging Up Count	S1				1	4	Aging up or down count accumulator
Bin Count	U1						Count of bins filled
Spare2	U1						
Min []	1 * 64			Ppb * LSB			Min XO error at each temp scaled by LSB
Max []	1 * 64			Ppb * LSB			Max XO error at each temp scaled by LSB

DRAFT

DRAFT

 <p>SiRF A CSR plc Company</p>	<h2>One Socket Protocol ICD</h2> <div style="border: 2px solid red; padding: 5px; display: inline-block; margin: 10px 0;"> <p>This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control.</p> </div> <p>Revision 5.5 11/16/2009</p>
--	--

5.36.4 TCXO Learning Test Mode Control

This message is missing in standard builds for products to be shipped to customers, and present in special test builds only made for the purpose of testing the TCXO features.

Table 70: Test Mode Control Message Definition


Message Name	TCXO_LEARNING
Input or Output	Input
MID (Hex)	DD
MID (Dec)	221
Message Name in Code	MID_TCXO_LEARNING_IN
SID (Hex)	0x03
SID (Dec)	3
SID Name in Code	TEST_MODE_CONTROL

Table 71: Test Mode Control Message Field Definitions

Name	Bytes	Binary (Hex)		Unit	ASCII (Dec)		Description
		Scale	Example		Scale	Example	
Message ID	U1					221	TCXO Learning In
Sub ID	U1					3	Clock Model Test Mode Control
TM Enable / Disable	U1				1	1	Bit Field for control of TCXO Test Mode. Bit 0: 0 = Rtc Cal will use Host updates 1 = Rtc Cal will ignore Host updates Bit 1: 0 = New TRec readings will update Temperature Table 1 = Ignore updates to the Temperature Table
spare1	U1						
spare2	U2						

DRAFT

DRAFT

 SiRF A CSR plc Company	One Socket Protocol ICD <div style="border: 2px solid red; padding: 5px; display: inline-block; margin: 10px 0;">This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control.</div> Revision 5.5 11/16/2009
--	--

5.37 WiFi Tag Message

The host sends a WiFi tag message whenever it discovers an active WiFi tower in range with a signal strength reaching a predefined threshold.

5.37.1 WiFi Tag Notification

Table 72: WiFi Tag Notification Message Definition

Message Name	WIFI_TAG
Input or Output	Input
MID (Hex)	0xEB
MID (Dec)	235
Message Name in Code	MID_WIFI_TAG
SID (Hex)	0x00
SID (Dec)	0
SID Name in Code	TAG_NOTIFICATION

Table 73: WiFi Tag Notification Message Field Definitions

Name	Bytes	Binary (Hex)		Unit	ASCII (Dec)		Description
		Scale	Example		Scale	Example	
Message ID	U1						
Sub ID	U1						
Tower ID	U6					This is typically the Mac address of the WiFi tower	
Signal Strength	S4			dBm		If zero, then the WiFi signal strength is unknown. If this value increases by a predefined threshold, a new WIFI_TAG message is sent to the engine with the new Signal Strength.	

DRAFT

5.38 Sensor Control Input

The Location Manager software will be implemented on the Tracker and the Host processor as shown by a block diagram in Figure 1. below. MEMS sensor data acquisition, limited error checking and packaging of sensor data into a message will occur in the Measurement Engine (tracker). The rest of the sensor data processing will be completed on the host processor. A sensor configuration message will be sent from the host processor to the Measurement or Location Engine at the time of startup. This message will describe the sensor set connected to the sensor I2C port on the Measurement or Location Engine, and the process of initialization and data acquisition for each the sensors connected to the I2C port. This mechanism will enable the customer to select the sensor set to be attached to I2C port of Measurement or Location Engine chip. The data acquisition software in the Measurement Engine will conduct limited error checking and packaging of the sensor data into a message which would be sent back to the host.

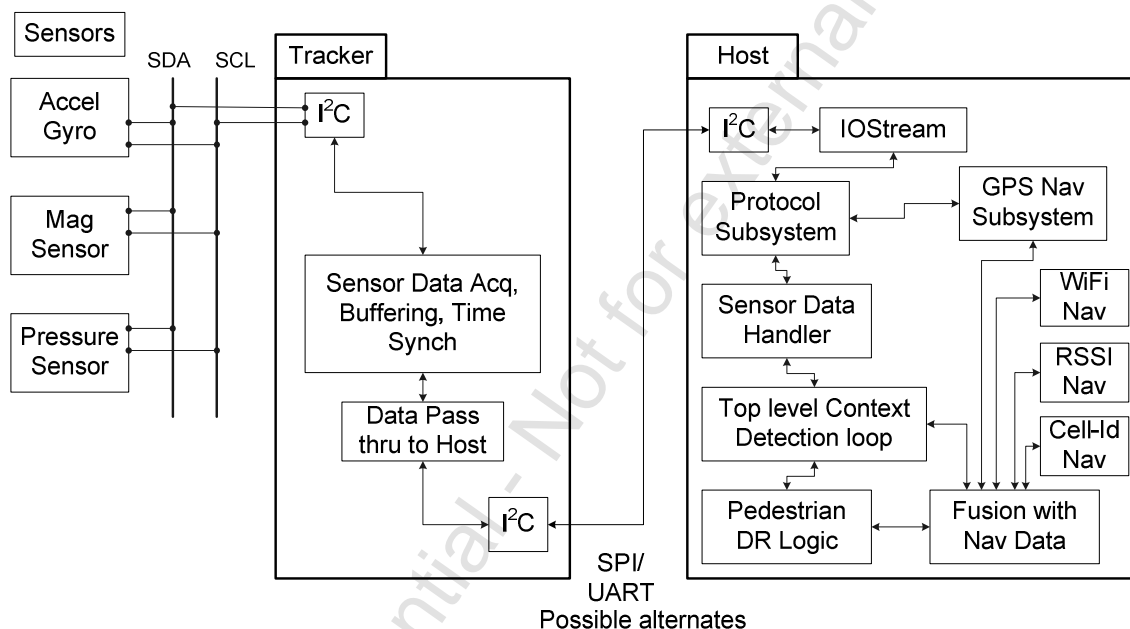



Figure 1. Sensor Control Architecture Block Diagram.

A sensor configuration message will be sent from the host processor to the Measurement or Location Engine at the time of startup. This message will describe the sensor set connected to the I2C port on the Measurement or Location Engine, the process of initialization and data acquisition for each the sensors connected to the tracker chip. This mechanism will enable the customer to select the sensor set to be attached to I2C port on in the Measurement or Location Engine.

	One Socket Protocol ICD
	Revision 5.5 11/16/2009

This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Table 74: Sensor Control Input

Message Name	SENSOR_CONTROL
Input or Output	Input
MID (Hex)	0xEA
MID (Dec)	234
Message Name in Code	MID_SensorControl
SID (Hex)	Listed Below
SID (Dec)	Listed Below
SID Name in Code	Listed Below

Table 75: Sensor Control Input SID Descriptions

Field Being Described	
Bit Field	Description
0x01	SENSOR_CONFIG
0x02	SENSOR_SWITCH

Each sensor control input message sent by the Host is responded to by a MID_MSG_ACK_OUT, ACK_NACK_ERROR SID message.

Table 76: Sensor Configuration Message information


Message Name	SENSOR_CONTROL
Input or Output	Input
MID (Hex)	0xEA
MID (Dec)	234
Message Name in Code	MID_SensorControl
SID (Hex)	0x01
SID (Dec)	1
SID Name in Code	SENSOR_CONFIG

Sensor configuration message is generated on the Host and sent across to the Measurement or Location Engine in order to provide the configuration information to the sensor data acquisition logic for the sensor(s) attached to I2C DR port. The sensor configuration information will be stored in a configuration file on the Host. This file will be read by the host application at startup, then a sensor configuration message (SSB) is formed and sent to the Nav thread running on the host. The Host application will create the sensor configuration MEI message which then will be sent to the Measurement Engine. The SSB message will contain additional information, such as zero point and scale factor for each sensor, which does not need to be sent to the Measurement Engine. This information will be extracted on the Host and stored on appropriate structures for use by the sensor data processing logic running on the Host.

Table 77: Sensor Configuration Message Fields Description

Name	Bytes	Binary (Hex)		Unit	ASCII (Dec)		Description
		Scale	Example		Scale	Example	
Message ID	U1		0xEA			234	SENSOR_CONTROL
Sub ID	U1		0x01			1	SENSOR_CONFIG
NUM_SENS	U1					1	Number of sensors
I2C_SPEED_SET	U1					3	I2C bus speed setting
SDA_SENS1	U2					24	Slave Device Address for

DRAFT

 <p>SiRF A CSR plc Company</p>	<h2>One Socket Protocol ICD</h2> <div style="border: 2px solid red; padding: 5px; display: inline-block; margin: 10px 0;"> <p style="color: red; font-size: small;">This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control.</p> </div> <p style="font-size: small;">Revision 5.5 11/16/2009</p>
--	--

		Binary (Hex)		ASCII (Dec)			
Sensor 1							
SENSR_TYP E_SEN1	U1				1	Sensor Type for sensor 1	
SEN_INIT_TI ME1	U1			ms	10	0	Sensor1 initialization period
NUM_BYTES _RES_SENS1	U1					198	Number of Bytes to be read from Register 1 and bit resolution in data read
SAMP_RATE 1	U1					6	Sample Rate for Sensor 1
SND_RATE1	U1					3	Sending rate of sensor 1 data back to the Host
DECM_MET HOD1	U1					0	Data decimation method setting
ACQ_TIME_ DELAY1	U1			microse conds	10	32	Acquisition time delay for sensor1
NUM_SEN_R EAD_REG1	U1					1	Number of registers to read sensor data from
READ_OPR_ REG1_SEN1	U1					1	Read operation method for register1 for sensor1
SENS_DATA _READ_ADD 1	U1					0	Register 1 address from which to read sensor 1 data
... Only one sensor registers to be read for data...							
LO_PWR_RE G_SEN1	U1					13	Register to put sensor 1 into Low Power mode
LO_PWR_M ODE_SET1	U1					0	Setting for above register to effect Low Power Mode
NRML_PWR _MODE_SET 1	U1					64	Setting for above register to effect normal power consumption mode
NUM_INIT_R EAD_REG_S EN1	U1					2	Number of registers to read sensor specific data from Sensor 1
INIT_READ_ REG1	U1					12	Register 1 address to read at time of initialization
NUM_BYTES _REG1	U1					1	Nr of bytes to read from Register 1 at initialization
INIT_READ_ REG2	U1					13	Register 2 address to read at time of initialization
NUM_BYTES _REG2	U1					1	Nr of bytes to read from Register 2 at initialization
.....End of init registers (only 2)details for sensor 1.....							
NUM_CNTR L_REG_SEN1	U1					2	Nr of Control registers for sensor 1 to configure
REG_WRITE _DELAY1	U1			ms	1	0	Time delay between two consecutive register writes
CNTRL_REG 1	U1					12	Control Register 1 address for sensor 1
CNTRL_REG	U1					227	Register 1 setting to be

DRAFT

DRAFT

 SiRF <small>A CSR plc Company</small>	One Socket Protocol ICD	
	This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control .	Revision 5.5 11/16/2009

		Binary (Hex)		ASCII (Dec)			
1_SET					sent to sensor 1.		
CNTRL_REG 2	U1			13	Control Register 2 address for sensor 1		
CNTRL_REG 2_SET	U1			64	Register 2 setting to be sent to sensor 1.		
.....End of ctrl registers (only 2) details for sensor 1.....							
SDA_SENS2	U1	NOT USED. ONLY ONE SENSOR ATTACHED CURRENTLY			Slave dev addr for sensor 2		
SENSR_TYPE_SEN2	U1				Sensor Type of sensor 2		
SEN_INIT_TIME2	U1				Sensor1 initialization period		
...	...						
SEN_DATA_PROC_RATE	U1		Hertz	1	1	Sensor data processing rate	
ZERO_PT_SEN1	U2				248	Zero Point Value for sensor 1	
SF_SEN1	U2				410	Scale Factor (sensitivity) for sensor 1	
ZERO_PT_SEN2	U2	NOT USED. ONLY ONE SENSOR ATTACHED CURRENTLY					Zero Point Value for sensor 2
SF_SEN2	U2						
...			
...			

NUM_SENS

Number of Sensor in the sensor set connected to DR sensor I2C port of GSD4t

I2C_SPEED_SET

I2C bus speed setting. The values for the bus speed setting are as follows:

- 0 - Low Speed,
- 1- Standard,
- 2 - Fast Mode,
- 3 - Fast mode Plus,
- 4- High speed.

Sensor with the lowest speed setting in the sensor set determines the speed mode for all sensors.

SDA_SENS1

Slave Device Address for Sensor 1. This supports 10 bit addressing.

SENSR_TYPE_SEN1

Sensor Type for sensor 1. The value for this setting is as follows:

- 1 - Accelerometer
- 2 - Magnetic sensor
- 3 - Pressure sensor
- 4 - Gyroscope
- 5 - Accelerometer + Gyroscope
- 6 - Accelerometer + Magnetic sensor
- 7 - Gyroscope + Magnetic sensor
- 8 = Accelerometer + Magnetic sensor + Gyro

CS-129291-DC2	© SiRF Technology, Inc., a member of the CSR plc group of companies 2009 This material is subject to SiRF's non-disclosure agreement.	Page 83 of 251
---------------	--	----------------

DRAFT



This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

SEN_INIT_TIME1

Sensor1 initialization period after power-up (milliseconds X 10). This is the amount of time which should be allowed before sensor is ready.

NUM_BYTES_RES_SENS1

Number of Bytes to be read from Register 1, sensor 1 (lower 4 bits). Resolution for each axis (upper 4 bits). This value can range from 9 through 16. Number of bytes would be 2, 4, 6 based on 1, 2 or 3 sensor axes

SAMP_RATE1

Sample Rate for Sensor 1 (Hertz). The values for this setting are as follows:

- 1 - 0.5Hz,
- 2 - 1Hz,
- 3 - 2Hz,
- 4 - 5Hz,
- 5 - 10 Hz,
- 6 - 25Hz,
- 7 - 50Hz,
- 8 through 15 – reserved

SND_RATE1

Rate (units Hertz) at which sensor 1 data is sent back to Host. The values for this setting are as follows:

- 1 - 0.5Hz,
- 2 - 1Hz,
- 3 - 2Hz,
- 4 - 5Hz,
- 5 - 10 Hz,
- 6 - 25Hz,
- 7 - 50Hz,
- 8 through 15 - reserved.

SND_RATE cannot be greater than SAMP_RATE.

DECM_METHOD1

Data decimation method setting. The values for this setting are as follows:

- 0 - raw,
- 1 - averaging,
- 2 - sliding median,
- 3 - reserved1,
- 4 - reserved2

ACQ_TIME_DELAY1

Acquisition time delay for sensor1 (microsecond X 10). Time period between triggering the sensor data acquisition and the sensor read operation.

NUM_SEN_READ_REG1

Number of registers to read sensor data from

READ_OPR_REG1_SEN1

Read operation method for register1 for sensor1.

DRAFT



One Socket Protocol ICD

This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

0 - means read only from SENS_DATA_READ_ADD. Other values mean Write with repeated start read.

SENS_DATA_READ_ADD1

Register 1 address from which sensor 1 data will be read

SENS_DATA_READ_ADD2

Register 2 address from which sensor 1 data will be read

... ..

LO_PWR_REG_SEN1

Register to put sensor 1 into Low Power mode

LO_PWR_MODE_SET1

Setting for LO_PWR_REG_SEN1 to affect Low Power Mode for sensor 1

NRML_PWR_MODE_SET1

Setting for LO_PWR_REG_SEN1 to affect normal power consumption mode for sensor 1

NUM_INIT_READ_REG_SEN1

Number of registers to read sensor specific data from Sensor 1 at the time of initialization. If the value is set to 0, then no register addresses would be specified.

INIT_READ_REG1

Register 1 address to be read at time of initialization

NUM_BYTES_REG1

Number of bytes to read from Register 1 at initialization

INIT_READ_REG2

Register 2 address to be read at time of initialization

NUM_BYTES_REG2

Number of bytes to read from Register 2 at initialization

... ..

NUM_CNTRL_REG_SEN1

Number of Control registers for sensor 1 which need to be configured. Configuration of the control registers takes place at the time of initialization of sensors.

REG_WRITE_DELAY1

Time delay (milliseconds) between two consecutive register writes

CNTRL_REG1

Control Register 1 address for sensor 1

CNTRL_REG1_SET

Register 1 setting to be sent to sensor 1. If the setting is 0xFF then CNTRL_REG1 address is to be used as a write command only.

CNTRL_REG2

DRAFT



This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

Control Register 2 address for sensor 1

CNTRL_REG1_SET

Register 2 setting to be sent to sensor 1. If the setting is 0xFF then CNTRL_REG2 address is to be used as a write command only.

... ..

(This is the start of description of second sensor in the message)

SDA_SENS2

Slave Device Address for sensor 2

SENSR_TYPE_SEN2

Sensor Type:

- 1 - Accelerometer
- 2 - Magnetic sensor
- 3 - Pressure sensor
- 4 - Gyroscope
- 5 - Accelerometer + Gyroscope
- 6 - Accelerometer + Magnetic sensor
- 7 - Gyroscope + Magnetic sensor
- 8 = Accelerometer + Magnetic sensor + Gyro

SEN_INIT_TIME2

Sensor 2 initialization period after power-up (milliseconds X 10)

... ..

SEN_DATA_PROC_RATE

Sensor data processing rate (in Hertz). This is rate at which sensor data will be processed on Host. Range: 1 - 256 Hz. This value can not be higher than SND_RATE.

ZERO_PT_SEN1

Zero Point Value for sensor 1. This is the bias value which will be subtracted from the sensor data measurement (in ADC counts) for sensor 1

SF_SEN1

Scale Factor (sensitivity) for sensor 1. The expression used for converting the sensor measurement in ADC counts to Engineering units is

Sensor 1 measurement = (sensor 1 ADC counts - ZERO_PT_SEN1) / SF_SEN1

ZERO_PT_SEN2

Zero Point Value for sensor 2

SF_SEN2

Scale Factor (sensitivity) for sensor 2

... ..

Notes:

1. This is a variable length message. The message payload length will be contained in the header of the message.
2. SAMP_RATE: For the first release we plan on supporting 50 Hz as the highest sampling rate. The other samples rates which will be supported are 25 Hz, 10 Hz, 5 Hz, 2 Hz, 1 Hz, and 0.5 Hz.

DRAFT



One Socket Protocol ICD

This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

3. **SND_RATE**: For the first implementation, the highest rate at which data can be sent from GSD4t to Host is 25 Hz. Also, **SND_RATE** cannot be higher than **SAMP_RATE**.
4. **LO_PWR_MODE_SET1**: If a sensor does not have the capability to switch to low power mode, then, **LO_PWR_REG_SEN1**, **LO_PWR_MODE_SET1** and **NRML_PWR_MODE_SET1** will contain 0x0.
5. The data acquisition software on GSD4t has following limitations for the maximum number of registers for each sensor :
 Maximum number of sensor data read registers **NUM_SEN_READ_REG** = 12
 Maximum number of initialization data registers **NUM_INIT_READ_REG_SE** = 12
 Maximum number of Control registers **NUM_CNTRL_REG_SEN** = 32
6. The maximum number of Bytes read from initialization data read register **NUM_BYTES_REG** = 20

Table 78: Information on messages to turn sensors on/off

Message Name	SENSOR_CONTROL
Input or Output	Input
MID (Hex)	0xEA
MID (Dec)	234
Message Name in Code	MID_SensorControl
SID (Hex)	0x02
SID (Dec)	2
SID Name in Code	SENSOR_SWITCH

This message sent from Host to the Measurement or Location Engine will turn the attached, entire sensor set OFF/ ON anytime after the configuration message has been sent. This message would be logged along with sensor data for post processing in NavOffline.

Table 79: Sensor Switch Message Fields Description

Name	Bytes	Binary (Hex)		Unit	ASCII (Dec)		Description
		Scale	Example		Scale	Example	
Message ID	U1		0xEA			234	SENSOR_CONTROL
Sub ID	U1		0x02			2	SENSOR_SWITCH
STATE_SENSOR_SET	U1						Bit 0 – 0 - turn sensor set OFF 1 - turn sensor set ON Bit 1 – 0 - turn the receiver state change notifications OFF 1 - turn the receiver state change notifications ON Bits 2-7 – Reserved.

DRAFT



This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

5.39 SirfDRive Input Messages

5.39.1 Msg-ID 0x2D (MID_TrkADCOdoGPIO)

MSG ID:

Number: 0x2D
Name: MID_TrkADCOdoGPIO
Purpose: Input Tracker to NAV – ADC/ODOMETER DATA

Message Length:

111 bytes @ 1Hz or 12 bytes @ 10Hz

Rate:

111 bytes @ 1Hz or 12 bytes @ 10Hz

Binary Message Definition:

This message is sent at a rate of 1Hz (default) or 10Hz whenever it is enabled by the control words in the Track Reset message on the GSP2t. Both ADC channels are sampled in a round-robin fashion at 50Hz whose raw measurements are then averaged every 100mSeconds in the tracker interrupt along with the current odometer counter value and GPIO states. The GSP2t Rev D on-chip ADC is a 14-bit successive approximation two channel ADC outputting signed 16-bit values from -12000 to 28000.

The GSP2eLP with DR option currently only has one ADC input that is sampled at 50Hz and whose raw measurements are then averaged every 100mSeconds in the tracker interrupt along with the current odometer counter and GPIO state. The DR option is a Maxim MAX1240 12-bit ADC on a daughter-board installed on the SDKL. The 12-bit resolution provides unsigned values from 0 to 4095.

On the GSP2t, this message can be transmitted in 1Hz mode or 10Hz mode. On the GSP2eLP, this message is only transmitted in 1Hz mode. In 1Hz mode, there are 10 data measurement blocks in one single message. In 10Hz mode, there is a single data measurement per message.

Byte #	Field	Data Type	Bytes	Units	Range	Res
1	Message ID	UINT8	1	n/a	0x2D	n/a
2 + (n-1)*11 (Note 0)	currentTime (Note 1)	UINT32	4	ms	0-4294967295	n/a
6 + (n-1)*11 (Note 0)	Gyro adc Avg (Note 2)	UINT16 Or INT16	2	n/a	0 to 4095 (GSP2eLP w/ DR option) Or -12000 to 28000 (GSP2t)	n/a
8 + (n-1)*11 (Note 0)	adc3Avg (Note 3)	UNIT16 Or INT16	2	n/a	0 (GSP2eLP w/ DR option) Or -12000 to 28000 (GSP2t)	n/a

DRAFT

 SiRF A CSR plc Company	One Socket Protocol ICD				
	This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control.				

10 + (n-1)*11 (Note 0)	odoCount (Note 4)	UINT16	2	n/a	0 to 65535	n/a
12 + (n-1)*11 (Note 0)	gpioStat (Note 5)	UINT8	1	Bit Map	bit 0 – if = 1: Reverse “ON” bits 1 to 7 Reserved	n/a

Note 0: n corresponds to either 1 or 1-10 depending on whether the message comes out a 10Hz (10 messages 1 data set) or 1Hz (1 message 10 data sets)

Note 1: Tracker Time, millisecond counts

Note 2: Averaged measurement from Gyro input. On the GSP2t, this is the ADC[2] input, on the GSP2eLP, this is the Maxim ADC input

Note 3: On a GSP2eLP system, there is currently only one ADC input so this field is always 0.

Note 4: Odometer counter measurement at the most recent 100mSec tracker interrupt. This field will rollover to 0 after 65535

Note 5: GPIO input states at the most recent 100mSec tracker interrupt

API:

```
#define NUM_OF_DR_RAW 10
```

```
typedef struct
```

```
{
```

```
    UINT32 currentTime;
```

```
    UINT16 adc2Avg;
```

```
    UINT16 adc3Avg;
```

```
    UINT16 odoCount;
```

```
    UINT8 gpioStat;
```

```
} tADCOdometer;
```

```
typedef struct
```

```
{
```

```
    struct
```

```
    {
```

```
        tADCOdometer ADCOdometer[NUM_OF_DR_RAW];
```

```
    } DrRaw;
```

```
} tDrRawData, *tDrRawDataPtr;
```

5.39.2 Msg-ID 0xAC;Sub-ID 0x01 (SID_SetDrNavInit)

MSG ID:

Number: 0xAC

Name: MID_DrIn

SUB ID:

Number: 0x01

Name: SID_SetDrNavInit

Purpose: DR NAV Initialization Input Message

CS-129291-DC2	© SiRF Technology, Inc., a member of the CSR plc group of companies 2009 This material is subject to SiRF's non-disclosure agreement.	Page 89 of 251
---------------	--	----------------

DRAFT

DRAFT

 SiRF A CSR plc Company	One Socket Protocol ICD
	Revision 5.5 11/16/2009

This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Message Length:

28 bytes

Rate:

Input

Binary Message Definition:

Byte #	Field	Data Type	Bytes	Units	Range	Res
1	Message ID	UINT8	1	n/a	0xAC	n/a
2	Sub-ID	UINT8	1	n/a	0x01	n/a
3-6	Latitude	INT32	4	deg	-90 to 90	10 ⁻⁷
7-10	Longitude	INT32	4	deg	-180 to 180	10 ⁻⁷
11-14	Altitude (from Ellipsoid)	INT32	4	meters	-2000 to 100000.0	.01
15-16	Heading (True)	UINT16	2	deg	0 to 360	.01
17-20	Clock Offset	INT32	4	Hz	25000 to 146000	n/a
21-24	Time Of Week	UINT32	4	secs	0 to 604800.00	.001
25-26	Week Number	UINT16	2	n/a	0 to 1023	n/a
27	Number of Channels	UINT8	1	n/a	1-12	n/a
28	Reset Configuration	UINT8	1	BitMap	Bit 0: Data valid flag (set warm/hot start) Bit 1: Clear ephemeris (set warm start) Bit 2: Clear memory (set cold start) Bit 3: Factory reset Bit 4: Enable raw track data Bit 5: Enable debug data for SiRF binary Bit 6: reserved Bit 7: reserved	n/a

API:

```
typedef struct
{
    INT32  Lat;
    INT32  Lon;
    INT32  Alt;
    UINT16 Hd;
    INT32  clkOffset;
    UINT32 timeOfWeek;
    UINT16 weekno;
    UINT8  chnlCnt;
    UINT8  resetCfg;
} MI_DR_NAV_INIT;
```

DRAFT

DRAFT



One Socket Protocol ICD

This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

5.39.3 Msg-ID 0xAC;Sub-ID 0x02(SID_SetDrNavMode)

MSG ID:

Number: 0xAC
Name: MID_DrIn

SUB ID:

Number: 0x02
Name: SID_SetDrNavMode
Purpose: DR NAV Mode Control Input Message

Message Length:

4 bytes

Rate:

Input

Binary Message Definition:

Byte #	Field	Data Type	Bytes	Units	Range	Res
1	Message ID	UINT8	1	n/a	0xAC	n/a
2	Sub-ID	UINT8	1	n/a	0x02	n/a
3	DR NAV Mode Control	UINT8	1	Bit Map	Bit settings are exclusive Bit 0: 1 = GPS Nav Only Bit 1: 1 = DR Nav Ok (with Stored or Default Calibration) Bit 2: 1 = DR Nav Ok with Current GPS calibration Bit 3: 1 = DR NAV Only Bits 4-7 Reserved	n/a
4	Reserved	UINT8	1	n/a	undefined	n/a

API:

```
typedef struct  
{  
    UINT8 Mode;  
    INT8 Reserved;  
} MI_DR_NAV_MODE;
```

DRAFT

DRAFT



One Socket Protocol ICD

This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

5.39.4 Msg-ID 0xAC;Sub-ID 0x03(SID_SetGyrFactCal)

MSG ID:

Number: 0xAC
Name: MID_DrIn

SUB ID:

Number: 0x03
Name: SID_SetGyrFactCal
Purpose: Gyro Factory Calibration Control Input Message

Message Length:

4 bytes

Rate:

Input

Binary Message Definition:

Byte #	Field	Data Type	Bytes	Units	Range	Res
1	Message ID	UINT8	1	n/a	0xAC	n/a
2	Sub-ID	UINT8	1	n/a	0x03	n/a
3	Gyro Factory Calibration Control (Note 1)	Bit Map	1	n/a	bit 0 = 1: Start Gyro Bias calibration bit 1 = 1: Start Gyro Scale Factor calibration (Note 2)	n/a
4	Reserved	UINT8	1	n/a	undefined	n/a

Note 1: The bit map of the Field variable controls the gyro factory calibration stages. The Gyro Factory Calibration procedure calls for the Gyro Bias Calibration to be done first while the gyro is stationary, and the Gyro Scale Factor Calibration to be done next while the gyro rotates smoothly through 360 degrees.

Note 2: The individual bits are referenced by their offset from the start of the bit map, starting with offset 0 for the LSB of the Least-Significant byte.

API:

```
typedef struct  
{  
    UINT8 Cal;  
    UINT8 Reserved;  
} MI_GYR_FACT_CAL;
```

DRAFT

DRAFT

 SiRF A CSR plc Company	One Socket Protocol ICD <div style="border: 2px solid red; padding: 5px; display: inline-block; margin: 10px 0;">This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control.</div> Revision 5.5 11/16/2009
--	--

5.39.5 Msg-ID 0xAC;Sub-ID 0x04(SID_SetDrSensParam)

MSG ID:

Number: 0xAC
Name: MID_DrIn

SUB ID:

Number: 0x04
Name: SID_SetDrSensParam
Purpose: DR Sensor's Parameters Input Message

Message Length:

7 bytes

Rate:

Input

Binary Message Definition:

Byte #	Field	Data Type	Bytes	Units	Range	Res
1	Message ID	UINT8	1	n/a	0xAC	n/a
2	Sub-ID	UINT8	1	n/a	0x04	n/a
3	Baseline Speed Scale Factor	UINT8	1	ticks/m	1 to 255 (default:4)	1
4-5	Baseline Gyro Bias	UNIT16	2	zero rate Volts	2.0 to 3.0 (default:2.5)	.0001
6-7	Baseline Gyro Scale Factor	UINT16	2	mV / (deg/sec)	1 to 65 (default: 22)	.001

API:

```
typedef struct  
{  
    UINT8 BaseSsf;  
    UINT16 BaseGb;  
    UINT16 BaseGsf;  
} MI_DR_SENS_PARAM;
```

CS-129291-DC2	© SiRF Technology, Inc., a member of the CSR plc group of companies 2009 This material is subject to SiRF's non-disclosure agreement.	Page 93 of 251
---------------	--	----------------

DRAFT

DRAFT



One Socket Protocol ICD

This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

5.39.6 Msg-ID 0xAC;Sub-ID 0x05(SID_PollDrValid)

MSG ID:

Number: 0xAC
Name: MID_DrIn

SUB ID:

Number: 0x05
Name: SID_PollDrValid
Purpose: Request Dr Valid to be outputted

Message Length:

10 bytes

Rate:

Input

Binary Message Definition:

Byte #	Field	Data Type	Bytes	Units	Range	Res
1	Message ID	UINT8	1	n/a	0xAC	n/a
2	Sub-ID	UINT8	1	n/a	0x05	n/a
3-6	Data Valid	UINT32	4	BitMap	bit 0: 1= invalid position bit 1: 1= invalid position error bit 2: 1= invalid heading bit 3: 1= invalid heading error bit 4: 1= invalid speed scale factor bit 5: 1= invalid speed scale factor error bit 6: 1= invalid gyro bias bit 7: 1= invalid gyro bias error bit 8: 1= invalid gyro scale factor bit 9: 1= invalid gyro scale factor error bit 10: 1= invalid baseline speed scale factor bit 11: 1= invalid baseline gyro bias bit 12: 1= invalid baseline gyro scale factor bit 13 - 31: reserved	n/a
7-10	Reserved	UNIT32	4	n/a	undefined	n/a

API

```
typedef struct  
{  
    UINT32 Valid;  
    UINT32 Reserved;  
} MI_DR_VALID;
```

DRAFT

DRAFT



One Socket Protocol ICD

This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

5.39.7 Msg-ID 0xAC;Sub-ID 0x06(SID_PollGyrFactCal)

MSG ID:

Number: 0xAC
Name: MID_DrIn

SUB ID:

Number: 0x06
Name: SID_PollGyrFactCal
Purpose: Request gyro calibration data to be outputted

Message Length:

4 bytes

Rate:

Input

Binary Message Definition:

Byte #	Field	Data Type	Bytes	Units	Range	Res
1	Message ID	UINT8	1	n/a	0xAC	n/a
2	Sub-ID	UINT8	1	n/a	0x06	n/a
3	Calibration	UINT8	1	bitmap	bit 0: 1 = start gyro bias calibration bit 1: 1 = start gyro scale factor calibration	n/a
4	Reserved	UNIT8	1	n/a	undefined	n/a

API:

```
typedef struct  
{  
    UINT8 Cal;  
    UINT8 Reserved;  
} MI_GYR_FACT_CAL;
```

DRAFT

DRAFT



One Socket Protocol ICD

This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

5.39.8 Msg-ID 0xAC;Sub-ID 0x07(SID_PollDrSensParam)

MSG ID:

Number: 0xAC
Name: MID_DrIn

SUB ID:

Number: 0x07
Name: SID_PollDrSensParam
Purpose: Request gyro & odo scale factors be outputted

Message Length:

7 bytes

Rate:

Input

Binary Message Definition:

Byte #	Field	Data Type	Bytes	Units	Range	Res
1	Message ID	UINT8	1	n/a	0xAC	n/a
2	Sub-ID	UINT8	1	n/a	0x07	n/a
3	Baseline Speed Scale Factor	UINT8	1	ticks/m	1 to 255 (default:4)	1
4-5	Baseline Gyro Bias	UNIT16	2	zero rate Volts	2.0 to 3.0 (default:2.5)	.0001
6-7	Baseline Gyro Scale Factor	UINT16	2	mV / (deg/sec)	1 to 65 (default: 22)	.001

API:

```
typedef struct  
{  
    UINT8 BaseSsf;  
    UINT16 BaseGb;  
    UINT16 BaseGsf;  
} MI_DR_SENS_PARAM;
```

DRAFT

DRAFT



One Socket Protocol ICD

This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

5.39.9 Msg-ID 0xAC;Sub-ID 0x09(SID_InputCarBusData)

MSG ID:

Number: 0xAC
Name: MID_DrIn

SUB ID:

Number: 0x09
Name: SID_InputCarBusData
Purpose: Input Car Bus Data to NAV

Message Length:

22 to 182 bytes

Rate:

Input at 1Hz

Binary Message Definition:

Byte #	Field	Data Type	Bytes	Units	Range	Res
1	Message ID	UINT8	1	N/A	0xAC	N/A
2	Sub-ID	UINT8	1	N/A	0x09	N/A
3	Sensor Data Type (SDT)	UINT8	1	N/A	0-127 1: Gyro, Speed Data, and Reverse 2: 4 Wheel Pulses, and Reverse 3: 4 Wheel Speed, and Reverse 4: 4 Wheel Angular Speed, and Reverse 5: Gyro, Speed Data, NO Reverse 6: 4 Wheel Pulses, NO Reverse 7: 4 Wheel Speed, NO Reverse 8: 4 Wheel Angular Speed, NO Reverse 9: Gyro, Speed Data, Reverse, Steering Wheel Angle, Longitudinal Acceleration, Lateral Acceleration 10: Yaw Rate Gyro, Downward Acceleration (Z), Longitudinal Acceleration (X), Lateral Acceleration (Y) 10-127: Reserved	N/A
4	Number of Valid data sets	UINT8	1	N/A	0-11	N/A
5	Reverse Bit Map N/A for SDT = 10	UINT16	2	N/A	Bit-wise indication of REVERSE status corresponding to each sensor data set, i.e. bit 0 corresponds to the first data set, bit 1 corresponds to the second data set, etc.	N/A

DRAFT

DRAFT



One Socket Protocol ICD


This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

Byte #	Field	Data Type	Bytes	Units	Range	Res
7+(N-1)* 16 (see Note 1)	Valid Sensor Indication	UINT8	1	N/A	Valid/Not Valid indication for each one of the 4 possible sensor inputs in a individual data set; when a particular bit is set to 1 the corresponding data is Valid, when the bit is set to 0 the corresponding data is NOT valid. Bit 0 corresponds to Data Set Time Tag Bit 1 corresponds to Odometer Speed Bit 2 corresponds to Data 1 Bit 3 corresponds to Data 2 Bit 4 corresponds to Data 3 Bit 5 corresponds to Data 4 Bits 6-7 : Reserved	N/A
8+(N-1)* 16 (see Note 1)	Data Set Time Tag	UINT32	4	msec	0-4294967295	1
12+ (N-1)*16 (see Note 1)	Odometer Speed (also known as VSS) N/A for SDT = 10	UINT16	2	m/sec	0 to 100	0.01
14+(N-1)* 16 (see Note 1)	Data 1 (Depends on SDT)	INT16	2	(Depends on (SDT))	(Depends on (SDT))	(Depends on (SDT))
	SDT = 1, 5, 9, 10: Gyro Rate			Deg/sec	-120 to 120	0.01
	SDT = 2, 6: Right Front Wheel Pulses			N/A	4000	1
	SDT = 3, 7: Right Front Wheel Speed			m/sec	0 to 100	0.01
	SDT = 4, 8: Right Front Wheel Angular Speed		rad/sec	-327.67 to 327.67	0.01	
16+(N-1)* 16 (see Note 1)	Data 2 (Depends on SDT)	INT16	2	(Depends on (SDT))	(Depends on (SDT))	(Depends on (SDT))
	SDT = 1: N/A			N/A	N/A	N/A
	SDT = 2, 6: Left Front Wheel Pulses			N/A	4000	1
	SDT = 3, 7: Left Front Wheel Speed			m/sec	0 to 100	0.01
	SDT = 4, 8: Left Front Wheel Angular Speed			rad/sec	-327.67 to 327.67	0.01
	SDT = 9: Steering Wheel Angle			deg	-720 to 720	0.05
	SDT = 10: Downwards Acceleration			m/sec ²	-15 to 15	0.001

DRAFT

DRAFT

 SiRF <small>A CSR plc Company</small>	One Socket Protocol ICD
<div style="border: 2px solid red; padding: 5px; width: fit-content; margin: auto;"> This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control. </div>	Revision 5.5 11/16/2009

Byte #	Field	Data Type	Bytes	Units	Range	Res
18+(N-1)* 16 (see Note 1)	Data 3 (Depends on SDT)	INT16	2	(Depends on (SDT))	(Depends on (SDT))	(Depends on (SDT))
	SDT = 1: N/A			N/A	N/A	N/A
	SDT = 2, 6: Right Rear Wheel Pulses			N/A	4000	1
	SDT = 3, 7: Right Rear Wheel Speed			m/sec	0 to 100	0.01
	SDT = 4, 8: Right Rear Wheel Speed			rad/sec	-327.67 to 327.67	0.01
	SDT = 9,10: Longitudinal Acceleration			m/sec ²	-15 to 15	0.001
20+(N-1)* 16 (see Note 1)	Data 4 (Depends on SDT)	INT16	2	(Depends on (SDT))	(Depends on (SDT))	(Depends on (SDT))
	SDT = 1: N/A			N/A	N/A	N/A
	SDT = 2, 6: Left Rear Wheel Pulses			N/A	4000	1
	SDT = 3, 7: Left Rear Wheel Speed			m/sec	0 to 100	0.01
	SDT = 4, 8: Left Rear Wheel Speed			rad/sec	-327.67 to 327.67	0.01
	SDT = 9,10: Lateral Acceleration			m/sec ²	-15 to 15	0.001
22+(N-1)* 16 (see Note 1)	Reserved	UINT8	1	N/A	N/A	N/A

Note 1: N indicates the number of valid data sets in the message

API:

```

typedef struct
{
    UINT8    ValidSensorIndication;
    UINT32   DataSetTimeTag;
    UINT16   OdometerSpeed;
    INT16    Data1;
    INT16    Data2;
    INT16    Data3;
    INT16    Data4;
    UINT8    Reserved;
} tCarSensorData;

typedef struct
{
    UINT8    SensorDataType;
    UINT8    NumValidDataSets;
    UINT16   ReverseBitMap;
    
```

CS-129291-DC2	© SiRF Technology, Inc., a member of the CSR plc group of companies 2009 This material is subject to SiRF's non-disclosure agreement.	Page 99 of 251
---------------	--	----------------

DRAFT

DRAFT



One Socket Protocol ICD

This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

```
tCarSensorData CarSensorData[11];  
} tCarBusData;
```

5.39.10 Msg-ID 0xAC;Sub-ID 0x0A(SID_CarBusEnabled)

MSG ID:

Number: 0xAC
Name: MID_DrIn

SUB ID:

Number: 0x0A
Name: SID_CarBusEnabled
Purpose: Indicates Car Bus is enabled and ready for function

Message Length:

6 bytes

Rate:

Input

Binary Message Definition:

Byte #	Field	Data Type	Bytes	Units	Range	Res
1	Message ID	UINT8	1	n/a	0xAC	n/a
2	Sub-ID	UINT8	1	n/a	0x0A	n/a
3 - 6	Mode ¹	UINT8	4	n/a	undefined	n/a

API:

```
typedef struct  
{  
    UINT32 Mode;  
} MI_DR_CAR_BUS_ENABLED;
```

¹ For future use

DRAFT

DRAFT



One Socket Protocol ICD

This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

5.39.11 Msg-ID 0xAC;Sub-ID 0x0B(SID_CarBusDisabled)

MSG ID:

Number: 0xAC
Name: MID_DrIn

SUB ID:

Number: 0x0B
Name: SID_CarBusDisabled
Purpose: Indicates Car Bus is not enabled and not ready for function

Message Length:

6 bytes

Rate:

Input

Binary Message Definition:

Byte #	Field	Data Type	Bytes	Units	Range	Res
1	Message ID	UINT8	1	n/a	0xAC	n/a
2	Sub-ID	UINT8	1	n/a	0x0B	n/a
3 - 6	Mode ²	UINT32	4	n/a	undefined	n/a

API:

```
typedef struct  
{  
    UINT32 Mode;  
} MI_DR_CAR_BUS_DISABLED;
```

5.39.12 Msg-ID 0xAC;Sub-ID 0x0C(SID_SetGenericSensorParam)

MSG ID:

Number: 0xAC
Name: MID_DrIn

SUB ID:

Number: 0x0C
Name: SID_SetGenericSensorParam
Purpose: DR set Sensor's Parameters Input Message

² For future use

DRAFT

DRAFT



One Socket Protocol ICD

This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

Message Length:

30 bytes

Rate:

Input

Binary Message Definition:

Byte #	Field	Data Type	Bytes	Units	Range	Res
1	Message ID	UINT8	1	N/A	0xAC	N/A
2	Sub-ID	UINT8	1	N/A	0x0C	N/A
3	Sensors[0].SensorType	UINT8	1	N/A	GYRO_SENSOR = 0x1 ACCELERATION_SENSOR = 0x2	N/A
4 – 5	Sensors[0].ZeroRateVolts	UINT16	2	volts	0 to 5.0 ³	0.0001
6– 7	Sensors[0].MilliVoltsPer	UINT16	2	millivolts	0 to 1000 ⁴	0.0001
8 – 9	Sensors[0].ReferenceVoltage	UINT16	2	volts	0 to 5.0	0.0001
10	Sensors[1].SensorType	UINT8	1	N/A	GYRO_SENSOR = 0x1 ACCELERATION_SENSOR = 0x2	N/A
11 – 12	Sensors[1].ZeroRateVolts	UINT16	2	volts	0 to 5.0	0.0001
13 – 14	Sensors[1].MilliVoltsPer	UINT16	2	millivolts	0 to 1000	0.0001
15 – 16	Sensors[1].ReferenceVoltage	UINT16	2	volts	0 to 5.0	0.0001
17	Sensors[2].SensorType	UINT8	1	N/A	GYRO_SENSOR = 0x1 ACCELERATION_SENSOR = 0x2	N/A
18 – 19	Sensors[2].ZeroRateVolts	UINT16	2	volts	0 to 5.0	0.0001
20 – 21	Sensors[2].MilliVoltsPer	UINT16	2	millivolts	0 to 1000	0.0001
22 – 23	Sensors[2].ReferenceVoltage	UINT16	2	volts	0 to 5.0	0.0001
24	Sensors[3].SensorType	UINT8	1	N/A	GYRO_SENSOR = 0x1 ACCELERATION_SENSOR = 0x2	N/A
25 – 26	Sensors[3].ZeroRateVolts	UINT16	2	volts	0 to 5.0	0.0001
27 – 28	Sensors[3].MilliVoltsPer	UINT16	2	millivolts	0 to 1000	0.0001
29 – 30	Sensors[3].ReferenceVoltage	UINT16	2	volts	0 to 5.0	0.0001

³ To restore ROM defaults for ALL sensors enter the value 0xdeadabba here. You must still include the remainder of the message but these values will be ignored.

⁴ For gyro this is millivolts per degree per second. For the acceleration sensor it is millivolts per metre per second ^ 2

DRAFT

DRAFT



One Socket Protocol ICD

This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

API:

```
typedef struct
{
    UINT8      SensorType;
    UINT32     ZeroRateVolts;
    UINT32     MilliVoltsPer;
    UINT32     ReferenceVoltage;
}MI_SensorDescriptionType;

typedef struct
{
    MI_SensorDescriptionType Sensors[MAX_NUMBER_OF_SENSORS];
} MI_DR_SENS_PARAM;
```

5.39.13 Msg-ID 0xAC;Sub-ID 0x0D(SID_PollGenericSensorParam)

MSG ID:

Number: 0xAC
Name: MID_DrIn

SUB ID:

Number: 0x0D
Name: SID_PollGenericSensorParam
Purpose: Request sensor scale factors be outputted

Message Length:

30 bytes

Rate:

Input

Binary Message Definition:

Byte #	Field	Data Type	Bytes	Units	Range	Res
1	Message ID	UINT8	1	N/A	0xAC	N/A
2	Sub-ID	UINT8	1	N/A	0x0D	N/A
3	Sensors[0].SensorType	UINT8	1	N/A	GYRO_SENSOR = 0x1 ACCELERATION_SENSOR = 0x2	N/A

DRAFT

DRAFT



One Socket Protocol ICD

This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

4 – 5	Sensors[0].ZeroRateVolts	UINT16	2	volts	0 to 5.0 ⁵	0.0001
6 – 7	Sensors[0].MilliVoltsPer	UINT16	2	millivolts	0 to 1000 ⁶	0.0001
8 – 9	Sensors[0].ReferenceVoltage	UINT16	2	volts	0 to 5.0	0.0001
10	Sensors[1].SensorType	UINT8	1	N/A	GYRO_SENSOR = 0x1 ACCELERATION_SENSOR = 0x2	N/A
11 – 12	Sensors[1].ZeroRateVolts	UINT16	2	volts	0 to 5.0	0.0001
13 – 14	Sensors[1].MilliVoltsPer	UINT16	2	millivolts	0 to 1000	0.0001
15 – 16	Sensors[1].ReferenceVoltage	UINT16	2	volts	0 to 5.0	0.0001
17	Sensors[2].SensorType	UINT8	1	N/A	GYRO_SENSOR = 0x1 ACCELERATION_SENSOR = 0x2	N/A
18 – 19	Sensors[2].ZeroRateVolts	UINT16	2	volts	0 to 5.0	0.0001
20 – 21	Sensors[2].MilliVoltsPer	UINT16	2	millivolts	0 to 1000	0.0001
22 – 23	Sensors[2].ReferenceVoltage	UINT16	2	volts	0 to 5.0	0.0001
24	Sensors[3].SensorType	UINT8	1	N/A	GYRO_SENSOR = 0x1 ACCELERATION_SENSOR = 0x2	N/A
25 – 26	Sensors[3].ZeroRateVolts	UINT16	2	volts	0 to 5.0	0.0001
27 – 28	Sensors[3].MilliVoltsPer	UINT16	2	millivolts	0 to 1000	0.0001
29 – 30	Sensors[3].ReferenceVoltage	UINT16	2	volts	0 to 5.0	0.0001

API:

```
#define MAX_NUMBER_OF_SENSORS 0x4
```

```
typedef struct
```

```
{
    UINT8    SensorType;
    UINT32   ZeroRateVolts;
    UINT32   MilliVoltsPer
    UINT32   ReferenceVoltage;
}
```

```
}MI_SensorDescriptionType;
```

```
typedef struct
```

```
{
    MI_SensorDescriptionType Sensors[MAX_NUMBER_OF_SENSORS];
} MI_DR_SENS_PARAM;
```

⁵ To restore ROM defaults for ALL sensors enter the value 0xdeadabba here. You must still include the remainder of the message but these values will be ignored.

⁶ For gyro this is millivolts per degree per second. For the acceleration sensor it is millivolts per metre per second ^ 2

DRAFT

DRAFT



One Socket Protocol ICD

This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

5.39.14 Msg-ID 0xAC;Sub-ID 0x50(SID_InputMMFData)

MSG ID:

Number: 0xAC
Name: MID_DrIn

SUB ID:

Number: 0x50
Name: SID_InputMMFData
Purpose: Input MMF data into Nav

Message Length:

86 bytes

Rate:

Input at 1Hz

Binary Message Definition:

Byte #	Field	Data Type	Bytes	Units	Range	Res
1	Message ID	UINT8	1	n/a	0xAC	n/a
2	Sub-ID	UINT8	1	n/a	0x50	n/a
3 - 6	RefGpsTow	UINT32	4	sec	0 to 604800.00	.001
7	NumValidDataSets ⁷	UINT8	1	n/a	0 to 3	n/a

⁷ Current implementation considers one and only one MMF packet.

DRAFT

DRAFT



One Socket Protocol ICD


This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

8	UseDataBitMap	UINT8	1	n/a	<p>Bit 0 is LSB</p> <p>Bit 0</p> <p>1 = Position must be updated if bit 3 = 1 0 = Position may be updated if bit 3 = 1</p> <p>Bit 1</p> <p>1 = Heading must be updated if bit 4 = 1 0 = Heading may be updated if bit 4 = 1</p> <p>Bit 2</p> <p>1 = Altitude must be updated if bit 5 = 1 0 = Altitude may be updated if bit 5 = 1</p> <p>Bit 3</p> <p>1 = Position provided is valid 0 = Position provided is NOT valid</p> <p>Bit 4</p> <p>1 = Heading provided is valid 0 = Heading provided is NOT valid</p> <p>Bit 5</p> <p>1 = Altitude provided is valid 0 = Altitude provided is NOT valid</p> <p>Bit 6 to 7: Reserved.</p>	n/a
9 – 12	Latitude[0]	INT32	4	deg	-90 to 90	1e-7f
13 – 16	Longitude[0]	INT32	4	deg	-180 to 180	1e-7f
17-20	HorPosUncert[0]	UINT32	4	metres	0 to 0xffffffff	.01
21-24	Altitude[0]	INT32	4	metre	-2000 to 120000	.1
25-28	VerPosUncert[0]	UINT32	4	metre	122000	.1
29-30	Heading[0]	UINT16	2	deg	0 to 360	.01
31-32	HeadingUncert[0]	UINT16	2	deg	0 to 180	.01
33-34	Reserved[0]	UINT16	2	n/a	undefined	n/a
35-38	Latitude[1]	INT32	4	deg	-90 to 90	1e-7f
39-42	Longitude[1]	INT32	4	deg	-180 to 180	1e-7f
43-46	HorPosUncert[1]	UINT32	4	metres	0 to 0xffffffff	.01
47-50	Altitude[1]	INT32	4	metre	-2000 to 120000	.1
51-54	VerPosUncert[1]	UINT32	4	metre	122000	.1
55-56	Heading[1]	UINT16	2	deg	0 to 360	.01
57-58	HeadingUncert[1]	UINT16	2	deg	0 to 180	.01
59-60	Reserved[1]	UINT16	2	n/a	undefined	n/a
61-64	Latitude[2]	INT32	4	deg	-90 to 90	1e-7f
65-68	Longitude[2]	INT32	4	deg	-180 to 180	1e-7f
69-72	HorPosUncert[2]	UINT32	4	metres	0 to 0xffffffff	.01
73-76	Altitude[2]	INT32	4	metre	-2000 to 120000	.1
77-80	VerPosUncert[2]	UINT32	4	metre	122000	.1
81-82	Heading[2]	UINT16	2	deg	0 to 360	.01
83-84	HeadingUncert[2]	UINT16	2	deg	0 to 180	.01
85-86	Reserved[2]	UINT16	2	n/a	undefined	n/a

DRAFT

DRAFT

 <p>SiRF A CSR plc Company</p>	<p style="text-align: right;">One Socket Protocol ICD</p> <div style="border: 2px solid red; padding: 5px; text-align: center;"><p>This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control.</p></div> <p style="text-align: right;">Revision 5.5 11/16/2009</p>
---	--

API:

```
typedef struct
{
    FLOAT32    Latitude;
    FLOAT32    Longitude;
    FLOAT32    HorPosUncert;
    FLOAT32    Altitude;
    FLOAT32    VerPosUncert;
    FLOAT32    Heading;
    FLOAT32    HeadingUncert;
    UINT16     Reserved;
} tMapFeedbackData2NAV;
```

```
typedef struct
{
    UINT32     MeasurementTime;
    FLOAT32    RefGpsTow;
    UINT16     NumValidDataSets;
    UINT16     UseDataBitMap;
    tMapFeedbackData2NAV  MMFData[3];
} tMapMatchedData2NAV;
```

CSR Confidential - Not for external distribution

DRAFT

DRAFT



One Socket Protocol ICD

This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

5.39.15 Msg-ID 0xAC;Sub-ID 0x51(SID_SetMMFMode)⁸

MSG ID:

Number: 0xAC
Name: MID_DrIn

SUB ID:

Number: 0x51
Name: SID_SetMMFMode
Purpose: Enable or disable MMF feedback processing within NAV

Message Length:

3 bytes

Rate:

Input

Binary Message Definition

Byte #	Field	Data Type	Bytes	Units	Range	Res
1	Message ID	UINT8	1	n/a	0xAC	n/a
2	Sub-ID	UINT8	1	n/a	0x51	n/a
3	Mode	UINT8	1	n/a	0 = disable 1 = enable	n/a

API:

static UINT32 MMFMode;

⁸ Defined but not used by MMF

DRAFT



This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

5.40 SGEE Download Input

These functions are needed to download the SGEE data into the SLC Flash and to get the SGEE and EE age from the SLC.

These SGEE file download input messages will use message id 232 (MID_EE_INPUT) and the output responses have message id 56 (SSB_EE). Different sub-message ids will be used to perform different actions.

Table 80: SGEE Download Input

MID (Hex)	0xE8
MID (Dec)	232
Message Name in Code	MID_EE_INPUT
SID (Hex)	As below
SID (Dec)	As below
SID Name in Code	As below

Table 81 shows the message IDs assigned to the input messages.

Table 81: Input Messages Sub- IDs.

SNo.	Sub-Message ID	Message Name
1.	0x16	ECLM Start Download
2.	0x17	ECLM File Size
3.	0x18	ECLM Packet Data
4.	0x19	Get EE Age
5.	0x1A	Get SGEE Age
6.	0xFD	EE Storage Control Input

SID 0x16 (22) ECLM Start Download

This message is sent from Host EE Downloader to the SLC to indicate that the host EE downloader is initiating the SGEE download procedure.

Table 82: ECLM Start Download Message Fields

Field	Length (bytes)	Description
MID	1	0xE8
SID	1	0x16

Success/failure response upon completion of the command: MID 0x38, SID 0x20.

SID 0x17 (23) ECLM File Size

This message is sent from Host EE Downloader to the SLC to indicate that the host EE downloader is initiating the size of the SGEE file to be downloaded..

DRAFT


 SiRF <small>A CSR plc Company</small>	One Socket Protocol ICD
	<div style="border: 2px solid red; padding: 5px; display: inline-block;"> This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control. </div> Revision 5.5 11/16/2009

Table 83: ECLM File Size Message Fields

Name	Bytes	Binary (Hex)		Unit	Description
		Scale	E.g.		
Message ID	1U		E8		Decimal 232
Sub Message ID	1U		17		23 : SID ECLM File Size
File Length	4U		00 00 28 59		Length of the SGEE File to be downloaded

Success/failure response upon completion of the command: MID 0x38, SID 0x20.

SID 0x18 (24) ECLM Packet Data

This message is used to send the SGEE data from host downloader to the GPS Receiver to be processed by CLM modules and saved in NVM.

Table 84: ECLM Packet Data Message Fields

Name	Bytes	Binary (Hex)		Unit	Description
		Scale	E.g.		
Message ID	1U		E8		Decimal 232
Sub Message ID	1U		18		24: SGEE Packet Data SubMsgld
Packet Sequence Number	2U		00 01		Packet Sequence number of the current packet Starting from 1 .
Packet Length	2U		0020		Length of the sgee data in current packet
Packet Data	Packet Length		62 12 31 06 03 02 07 d9 07 07 00 00 39 6d 8f 12 00 00		SGEE Data of length indicated in Packet Length of the message.

DRAFT

DRAFT

 <p>SiRF A CSR plc Company</p>	One Socket Protocol ICD	This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control .	Revision 5.5 11/16/2009
--	--------------------------------	---	----------------------------

			00 00 00 00 01 2d 9a e7 05 02 ff fe 28 05
--	--	--	---

Payload length: 6+ Packet Length bytes.

Success/failure response upon completion of the command: MID 0x38, SID 0x20.

SID 0x19 (25) Get EE Age

This message is sent to GPS Receiver to get the age of extended ephemeris stored in GPS Receiver.

Table 85: Get EE Age Message Fields

Name	Bytes	Binary (Hex)		Unit	Description
		Scale	E.g.		
Message ID	1U		E8		Decimal 232
Sub Message ID	1U		19		25: Get EE Age
Num Sat	1U		01		Number of satellites
prnNum;	1U		01		Prn Number
ephPosFlag	1U		00		
eePosAge	2U		0000		
cgeePosGPSWeek	2U		0000		
cgeePosTOE	2U		0000		
ephClkFlag	1U		00		
eeClkAge	2U		0000		

DRAFT

DRAFT

 SiRF A CSR plc Company	One Socket Protocol ICD		
	This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control.		Revision 5.5 11/16/2009

cgeeClkGPSWeek	2U		0000		
cgeeClkTOE	2U		0000		
Pad	1U		00		

Payload length: 19 bytes

Success response upon completion of the command is acknowledged with– SSB Message ID 56, Sub Msg ID 0x21 along with EE Age of the satellite(s).

Failure response upon completion of the command is acknowledged with “Nack” using Command Negative Acknowledgement - MID 0x38, SID 0x20.

SID 0x1A (26) Get SGEE Age

This message is sent to GPS Receiver to get the age of SGEE stored in GPS Receiver.

Table 86: Get SGEE Age Message Fields

Name	Bytes	Binary (Hex)		Unit	Description
		Scale	E.g.		
Message ID	1U		E8		Decimal 232
Sub Message ID	1U		1A		26: Get SGEE Age
Sat ID	1U		01		Satellite ID for which SGEE Age is requested

Payload length: 3 bytes

Success response upon completion of the command is acknowledged using Command Acknowledgement Message ID 56, Sub Msg ID 0x22 along with SGEE Age of the satellite(s).

Failure response upon completion of the command is acknowledged with “Rejected: MID_ECLMAckNack” using Command Negative Acknowledgement - MID 0x38, SID 0x20.

SID 0xFD (253) EE Storage Control Input

This message determines where to store extended ephemeris. This message is supported only for GSD4e and for products beyond. The scope of this message and the rules of overriding other settings of this value that may have already been stored are described in section 7.14.

Table 87: EE Storage Control Input Message

CS-129291-DC2	© SiRF Technology, Inc., a member of the CSR plc group of companies 2009 This material is subject to SiRF's non-disclosure agreement.	Page 112 of 251
---------------	--	-----------------

DRAFT

DRAFT

 SiRF <small>A CSR plc Company</small>	One Socket Protocol ICD
	<div style="border: 2px solid red; padding: 5px; display: inline-block;"> This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control. </div> Revision 5.5 11/16/2009

Message Name	EE Storage Control
Input or Output	Input
MID (Hex)	0xE8
MID (Dec)	232
Message Name in Code	MID_EE_INPUT
SID (Hex)	0xFD
SID (Dec)	253
SID Name in Code	EE_STORAGE_CONTROL

Table 88: EE Storage Control Input Message Field Definitions

Name	Bytes	Binary (Hex)		Unit	ASCII (Dec)		Description
		Scale	Example		Scale	Example	
Message ID	1		0xE8			232	Message ID
Sub ID	1		0xFD			253	Sub ID
EE Storage Control	1						See bit-field table below

Table 89: EE Storage Control Input Message Bit-Field Specification

EE Storage Control Options Bit Field Description	
Bit Field	Description
[1:0]	00 = storage available on host 01 = I2C EEROM provided for GSD4e access (default) 10 = store to parallel FLASH 11 = no storage
[7:2]	Reserved

5.41 SW Toolbox Input

These messages allow the User System to access Tracker features via the Host. The Host will essentially map the SSB requests from the User System to MEI requests for the Tracker. The mapping is required since a direct pass-through is not always allowed. Some User System requests will require a corresponding change to the Host (for example, a change to the Tracker baud rate will necessitate a change at the Host or communication will be lost).

Table 90: SW Toolbox Input

MID (Hex)	0xB2
MID (Dec)	178
Message Name in Code	MID_TrackerIC (see PROTOCOL.H)
SID (Hex)	As below
SID (Dec)	As below
SID Name in Code	As below

5.41.1 SID 0x01 (1) SID_MeiToCustomIo

The format of this message is dependent upon the custom I/O, therefore the content of this message set is not listed in this document. Instead, a separate ICD describing this message and the associated custom I/O will be distributed to each targeted customer under NDA.

CS-129291-DC2	© SiRF Technology, Inc., a member of the CSR plc group of companies 2009 This material is subject to SiRF's non-disclosure agreement.	Page 113 of 251
---------------	--	-----------------

DRAFT


 <p>SiRF A CSR plc Company</p>	<h2>One Socket Protocol ICD</h2> <div style="border: 2px solid red; padding: 5px; display: inline-block; margin: 10px 0;"> This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control. </div> <p>Revision 5.5 11/16/2009</p>
--	---

Table 91: Tracker MEI to Custom I/O Command

Field	Length (bytes)	Description
MID	1	0xB2
SID	1	0x01
Varies	n	Dependent upon the custom I/O

Response upon completion of the command: 0x0B (MID_ACK). Upon output of the SSB 0x0B (MID_ACK) response, the Host will send the appropriate MEI 0x1F (Select Custom I/O) command to the Tracker.


5.41.2 SID 0x02 (2) SID_TrackerConfig

The scope of this message and the rules of overriding other settings of these values that may have already been stored are described in section 7.14.

Table 92: Tracker Configuration Command

Field	Length (bytes)	Description
MID	1	0xB2
SID	1	0x02
Reference Clock Frequency	4	Value of attached TCXO in Hz. This parameter has no default.
Reference Start-up Delay	2	Tracker inserts the start-up delay on TCXO power-up. The units are RTC clock cycles, and start-up delay can range from 0 to 2 seconds. The Tracker default is 0x03FF or 31.2 ms.
Reference Initial Uncertainty	4	Initial TCXO uncertainty in ppb. The value 0xFFFFFFFF means initial uncertainty unknown, and the Tracker will use the default uncertainty.
Reference Initial Offset	4	Initial TCXO offset in Hz. Note this value is signed. The value 0x7FFFFFFF means the initial offset is unknown, and the Tracker will use the default offset.
LNA	1	0 = Use Internal LNA (Tracker default) 1 = Use External LNA
IO Pin Configuration Enable	1	0 = Disable (also means all IO pins are disabled) 1 = Enable (use IO Pin Configuration field) The default is one.
IO Pin Configuration	4	0 = TM and TSYNC are enabled Other values undefined. The default is zero.
UART Baud	4	The following is the list of valid bauds: 900, 1200, 1800, 2400, 3600, 4800, 7200, 9600, 14400, 19200, 28800, 38400, 57600, 76800, 115200, 153600, 230400, 307200, 460800, 614400, 921600, 1228800, and 1843200. The Tracker default is 115200. Warning note for 4e: Operation at speeds below 38400 carries risk of dropped messages when using SGEE

DRAFT

 SiRF A CSR plc Company	One Socket Protocol ICD <div style="border: 2px solid red; padding: 5px; display: inline-block; margin: 10px 0;">This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control.</div> Revision 5.5 11/16/2009
--	--

Field	Length (bytes)	Description
UART Flow Control	1	0 = Disable hardware flow control (Tracker default) 1 = Enable hardware flow control
UART Wake Up Pattern	1	This byte is repeated in payload field of Tracker Wake Up Message.
UART Wake Up Count	1	This parameter defines the number of times to repeat the UART Wake Up Pattern in the Tracker Wake Up Message. In case of zero, the Tracker Wake Up Message is not generated. The default is zero.
I2C Master Address (user system)	2	Either a 7-bit or a 10-bit I2C address. If this 16-bit field begins with 0xF, then this is a flag indicating 10-bit I2C addressing is being used. For a 7-bit address, only the lower 7 bits are used. For a 10-bit address, only the lower 10-bits are used. The default address is 0x62. For a 7-bit I2C address, this field will range from 0x0008 through 0x007F. Values lower than 0x08 have special uses (see the I2C Bus Specification for a description). For a 10-bit I2C address, this field will range from 0xF000 through 0xF3FF.
I2C Slave Address (GSD4t)	2	Either a 7-bit or a 10-bit I2C address. If this 16-bit field begins with 0xF, then this is a flag indicating 10-bit I2C addressing is being used. For a 7-bit address, only the lower 7 bits are used. For a 10-bit address, only the lower 10-bits are used. The default address is 0x60. For a 7-bit I2C address, this field will range from 0x0008 through 0x007F. Values lower than 0x08 have special uses (see the I2C Bus Specification for a description). For a 10-bit I2C address, this field will range from 0xF000 through 0xF3FF.
I2C Mode	1	0 = Slave 1 = Multi-Master (default)
I2C Rate	1	0 = 100 Kbps 1 = 400 Kbps (default) 2 = 1 Mbps (not available on GSD4t) 3 = 3.4 Mbps (not available on GSD4t)
Power Supply Config Select	1	0 = Switching regulator 1 = Internal LDO 2 = External voltage 3 = Backup LDO

Response upon completion of the command: 0x0B (MID_ACK). Upon output of the SSB 0x0B (MID_ACK) response, the Host will send the appropriate MEI 0x0A (Tracker Configuration) command to the Tracker.

CS-129291-DC2	© SiRF Technology, Inc., a member of the CSR plc group of companies 2009 This material is subject to SiRF's non-disclosure agreement.	Page 115 of 251
---------------	--	-----------------

DRAFT

DRAFT



One Socket Protocol ICD

This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

5.41.3 SID 0x03 (3) SID_PeekPoke

Tracker Peek and Poke Command (four-byte peek)

Table 93: Tracker Peek and Poke Command (four-byte peek)

Field	Length (bytes)	Description
MID	1	0xB2
SID	1	0x03
Type	1	enumeration 0 = Peek (always four bytes) 10 = eFUSE peek (4e and beyond only, 4 bytes)
Access	1	enumeration 1 = 8-bit access (byte access) 2 = 16-bit access (half-word access) 4 = 32-bit access (word access)
Address	4	unsigned integer
Data	4	ignored (usually filled with zero)

Response upon completion of the command: 0x0B (MID_ACK). Upon output of the SSB 0x0B (MID_ACK) response, the Host will send the appropriate MEI 0x1E (Peek and Poke Command) command to the Tracker.

Tracker Peek and Poke Command (four-byte poke)


Table 94: Tracker Peek and Poke Command (four-byte poke)

Field	Length (bytes)	Description
MID	1	0xB2
SID	1	0x03
Type	1	enumeration 1 = Poke (always four bytes)
Access	1	enumeration 1 = 8-bit access (byte access) 2 = 16-bit access (half-word access) 4 = 32-bit access (word access)
Address	4	unsigned integer
Data	4	

Response upon completion of the command: 0x0B (MID_ACK). Upon output of the SSB 0x0B (MID_ACK) response, the Host will send the appropriate MEI 0x1E (Peek and Poke Command) command to the Tracker.

DRAFT

DRAFT

 SiRF A CSR plc Company	One Socket Protocol ICD
<div style="border: 2px solid red; padding: 5px; display: inline-block;">This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control.</div>	
Revision 5.5 11/16/2009	

Tracker Peek and Poke Command (n-byte peek)

Table 95: Tracker Peek and Poke Command (n-byte peek)

Field	Length (bytes)	Description
MID	1	0xB2
SID	1	0x03
Type	1	enumeration 2 = Multi-peek 12 = eFUSE multi-peek (4e and beyond only)
Access	1	enumeration 1 = 8-bit access (byte access) 2 = 16-bit access (half-word access) 4 = 32-bit access (word access)
Address	4	unsigned integer Beginning address
Number of Bytes	2	unsigned integer Range: 0 to 1000 If zero, no data is read

Response upon completion of the command: 0x0B (MID_ACK). Upon output of the SSB 0x0B (MID_ACK) response, the Host will send the appropriate MEI 0x1E (Peek and Poke Command) command to the Tracker.

Tracker Peek and Poke Command (n-byte poke)

Table 96: Tracker Peek and Poke Command (n-byte poke)

Field	Length (bytes)	Description
MID	1	0xB2
SID	1	0x03
Type	1	enumeration 3 = Multi-poke
Access	1	enumeration 1 = 8-bit access (byte access) 2 = 16-bit access (half-word access) 4 = 32-bit access (word access)
Address	4	unsigned integer Beginning address
Number of Bytes	2	unsigned integer Range: 0 to 1000 If zero, no data is written
Data	Number of Bytes	

Response upon completion of the command: 0x0B (MID_ACK). Upon output of the SSB 0x0B (MID_ACK) response, the Host will send the appropriate MEI 0x1E (Peek and Poke Command) command to the Tracker.

5.41.4 SID 0x14 (20) SID_PatchStorageControlInput

CS-129291-DC2	© SiRF Technology, Inc., a member of the CSR plc group of companies 2009 This material is subject to SiRF's non-disclosure agreement.	Page 117 of 251
---------------	--	-----------------

DRAFT

DRAFT

	One Socket Protocol ICD
	<div style="border: 2px solid red; padding: 5px; display: inline-block;"> This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control. </div> Revision 5.5 11/16/2009

This message specifies where to store the patches. This message can only be valid for products GSD4e and beyond. The scope of this message and the rules of overriding other settings of this value that may have already been stored are described in section 7.14.

Table 97: Patch Storage Control Message Definition

Message Name	Patch Storage Control
Input or Output	Input
MID (Hex)	0xB2
MID (Dec)	178
Message Name in Code	SIRF_MSG_SSB_TRACKER_IC
SID (Hex)	0x14
SID (Dec)	20
SID Name in Code	PATCH_STORAGE_CONTROL

Table 98: Patch Storage Control Message Field Definitions

Name	Bytes	Binary (Hex)		Unit	ASCII (Dec)		Description
		Scale	Example		Scale	Example	
Message ID	1		0xB2			178	Message ID
Sub ID	1		0x14			20	Sub ID
Patch Storage Control	1						See bit-field table below

Table 99: Patch Storage Control Message Bit-Field Specification

Patch Storage Control Options Bit Field Description	
Bit Field	Description
[0]	0 = don't store to I2C serial flash (default) 1 = store to I2C serial flash
[7:1]	Reserved

5.41.5 SID 0x22 (34) SID_Initial Patch Memory Load Request

Table 100: Initial Patch Memory Load Request Message Definition

Field	Length (bytes)	Description
Message Id	1	0xB2
Sub Id	1	0x22
Sequence No	2	Message Sequence Number 1
1st Load Type Character	1	If Patch Data, then 'P'.
2nd Load Type Character	1	If Patch Data, then 'M'.
Chip Id	2	Chip Id
Silicon Version	2	Silicon Version
ROM Version Code	2	ROM Version Code
Patch Revision Code	2	Patch Revision Code
Patch Data Base Address	4	Patch Data Base Address
Total Patch Data Length	2	Total Patch Data Length + 2 for Patch Payload CRC16
Patch Load Data	variable (<= 996 bytes)	Patch Load Data (may include Patch Payload CRC16)

DRAFT

DRAFT



One Socket Protocol ICD

This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

Sequence No:

The Sequence No is set to 1 (This marks the Initial PM Load Request)

1st Load Type Character:

If Load Patch Memory Request is being used to load patch data, then this value is set to the 'P'.

2nd Load Type Character:

If Load Patch Memory Request is being used to load patch data, then this value is set to the 'M'.

Chip Id:

This field is the 4e chip id to be stored.

Silicon Version:

This field is the Silicon Version to be stored.

ROM Version Code:

This field is the ROM Version Code to be stored.

Patch Revision Code:

This field is the Patch Revision Code to be stored.

Total Patch Data Length:

This field indicates the total number of bytes in the Patch Load Data.

Patch Data Base Address:

This field contains the start address of where the patch data can reside.

Patch Load Data:

This field contains the sequence of bytes that is to be loaded in the patch memory. The segment offset and segment length is embedded in the Patch Load Data. Note the last 2 bytes of the last Patch Memory Load Request message will contain the patch data CRC16 value.

Subsequent Patch Memory Load Request(s) (if needed)

Table 101: Subsequent Patch Memory Load Request Message Definition

Field	Length (bytes)	Description
Message Id	1	0xB2
Sub Id	1	0x22
Sequence No	2	Message Sequence Number (2,...X)
Patch Load Data	variable (≤ 1008 bytes)	Patch Load Data (last Patch Memory Load Request will contain the Patch Payload CRC16 value)

Sequence No:

The Sequence No is set to something other than 1.

Patch Load Data:

This field contains the sequence of bytes that is to be loaded in the patch memory. The segment offset and segment length is embedded in the Patch Load Data.

DRAFT

DRAFT

 SiRF A CSR plc Company	One Socket Protocol ICD
<div style="border: 2px solid red; padding: 5px; display: inline-block;">This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control.</div>	
Revision 5.5 11/16/2009	

5.41.6 SID 0x26 (38) SID_Patch Manager Exit Request

Table 102: Patch Manager Exit Request Message Definition

Field	Length (bytes)	Description
Message Id	1	0xB2
Sub Id	1	0x26

This message consists only of the MSG_ID and SUB_ID itself and there is no MSG_DATA. It is sent to inform the 4e that all patch related exchanges are complete.

5.41.7 SID 0x28 (40) SID_Patch Manager Start Request

Table 103: Patch Manager Start Request Message Definition

Field	Length (bytes)	Description
Message Id	1	0xB2
Sub Id	1	0x28

This message is sent to query the 4e for its Patch Manager Prompt message and usually indicates the start of the Patch Protocol to load a patch. This message consists only of the MSG_ID and SUB_ID itself and there is no MSG_DATA.

5.42 SiRFNAV Command Messages

The host sends a command message to the SLC.

5.42.1 Store GPS Snapshot Information

This message commands the SLC to save all GPS data in non-volatile memory when this command is executed. The GPS data saved includes but not restricted to AGC value, crystal uncertainty, position, ephemeris, almanac, UTC offset, SV health status, IONO, SBAS data, software version, power control parameters, SV visible list and other receiver data.

Table 104: GPS Data Snapshot Saving Message Definition

Message Name	MID_SIRFNAV_COMMAND
Input or Output	Input
MID (Hex)	0xA1
MID (Dec)	161
Message Name in Code	MID_SSB_SIRFNAV_COMMAND
SID (Hex)	0x07
SID (Dec)	7
SID Name in Code	SSB_SIRFNAV_STORE_NOW


Table 105: GPS Data Snapshot Saving Message Field Definitions

Name	Bytes	Binary (Hex)		Unit	ASCII (Dec)		Description
		Scale	Example		Scale	Example	
Message ID	U1		0xA1			161	
Sub ID	U1		0x07			7	
Reserved	U1						

CS-129291-DC2	© SiRF Technology, Inc., a member of the CSR plc group of companies 2009 This material is subject to SiRF's non-disclosure agreement.	Page 120 of 251
---------------	--	-----------------

DRAFT

DRAFT

 SiRF A CSR plc Company	One Socket Protocol ICD <div style="border: 2px solid red; padding: 5px; display: inline-block; color: red; font-weight: bold;">This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control.</div> Revision 5.5 11/16/2009
--	---

6 Output Message Definition

6.1 Position Response

Table 106: Position Response Message Definition

MID (Hex)	0x45
MID (Dec)	69
Message Name in Code	MID_POS_MEAS_RESP
SID (Hex)	0x01
SID (Dec)	1
SID Name in Code	POS_RESP

Table 107: Position Response Message

Field	Length(bits)	
Message ID	8	
Message Sub ID	8	
POS_REQ_ID	8 bits	
POS_RESULTS_FLAG	8 bits	
POSITION_ERROR_STATUS	8 bits	
POS_ACC_MET	8 bits	
POSITION MAIN SECTION	POS_TYPE	8 bits
	DGPS_COR	8 bits
	MEAS_GPS_WEEK	16 bits
	MEAS_GPS_SECONDS	32 bits
	MEAS_LAT	32 bits
	MEAS_LONG	32 bits
	OTHER SECTIONS	8 bits
Following sections from <u>Horizontal Error</u> to <u>Position Correction</u> are always present, but their validity depends on the value of OTHER SECTIONS		
HORIZONTAL ERROR SECTION	ER_EL_ANG	8 bits
	MAJ_STD_ER	8 bits
	MIN_STD_ER	8 bits
VERTICAL POSITION SECTION	HEIGHT	16 bits
	HEIGHT_STD_ER	8 bits
VELOCITY	HOR_VEL	16 bits

CS-129291-DC2	© SiRF Technology, Inc., a member of the CSR plc group of companies 2009 This material is subject to SiRF's non-disclosure agreement.	Page 121 of 251
---------------	--	-----------------

DRAFT

DRAFT



One Socket Protocol ICD

This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

SECTION		
	HEADING	16 bits
	VER_VEL	8 bits
	VEL_ER_EL_ANG	8 bits
	VEL_MAJ_STD_ER	8 bits
	VEL_MIN_STD_ER	8 bits
	VER_VEL_STD_ER	8 bits
CLOCK CORRECTION SECTION	TIME_REF	8 bits
	CLK_BIAS	16 bits
	CLK_DRIFT	16 bits
	CLK_STD_ER	8 bits
	UTC_OFF	8 bits
POSITION CORRECTION SECTION	NB_SV	8 bits
	Two following fields are repeated 16 times, only the first "NB_SV" fields are valid.	
	SV_PRN	8 bits
	C_N0	8 bits
	INV_WEIGHTS	8 bits

POS_REQ_ID Position/measurement response identifier
This is the POS_REQ_ID (sent in a request) that the returned position/measurements are associated with.

POSITION_RESULTS_FLAG Position Results flag

If set to "0x00", all fields of the position result section from POSITION_ERROR_STATUS to INV_WEIGHTS are invalid and must be set to zero. No position information (even the "no position" information) is delivered.

If set to "0x01", some fields in the position result section are valid.

DRAFT



This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

POSITION_ERROR_STATUS: Position Error Status

If set to 0x00, position information is delivered. POSITION MAIN SECTION is valid, plus other optional fields (see OTHER_SECTIONS field).

If set to any other value, the rest of the position results block is invalid and must be set to all zeros. The non-zero value provides information about the reason of the “no position delivered” information, according to the table below.

Table 97: POSITION_ERROR_STATUS field

Status	Value
Valid Position	0x00
Not Enough satellites tracked ⁽¹⁾	0x01
GPS Aiding data missing (not supported)	0x02
Need more time	0x03
No fix available after full search	0x04
Unused	0x05
Position Reporting Disabled	0x06
Rejected Position Reporting for QoP	0x07
Reserved	0x08-0xff

⁽¹⁾: This case has been added to be compatible with the reporting capabilities defined in the GSM standard. From the document, there is no clear definition when this error case should be reported.

The following list details each situation:

Valid Position:

Position is available in the next fields.

Not Enough Satellites tracked:

SLC is tracking some satellites already, but not enough to compute a position.

GPS Aiding data missing:

Defined but not available aiding information to compute a position with satisfactory QoP.

Need more time:

No position was available within the RESP_TIME_MAX requested in the last data message.

No fix available after full search:

SLC went through all search strategy once and we could not compute a fix (all cases are covered here).



This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

Position Reporting Disabled:

When the QoP specification in the originating POS_REQ can not be met any longer due to a low power transition request with conflicting QoP specification, POS_RESP messages are not generated while in the conflicting low power mode. This might occur after transitioning to trickle power or push-to-fix low power mode.

Rejected Position Reporting for QoP:

When the QoP specification in the originating POS_REQ could not be met due to an existing low power mode with conflicting QoP specification, the POS_REQ request is rejected and no POS_RESP messages are generated, even after transitioning out of the current low power mode.

POS_ACC_MET Position Accuracy Flag

If set to 1 (0) then horizontal error as well as vertical error in the position are estimated to be respectively less (more) than the maximum requested horizontal error and maximum requested vertical error with a confidence level of 95%.

POS_TYPE Position Type

The SLC shall set this field according to what is shown in Table 98 (x indicates a don't care bit).

Table 98: POS_TYPE Field Specification

POS_TYPE field value	Position Type
'xxxxxx00'	2D
'xxxxxx01'	3D
'xx0xxxxx'	Not a trickle power solution.
'xx10xxxx'	Trickle power solution (QoP ignored)
'x00000xx'	QoP guaranteed
'xxxxx1xx'	WiFi-tagged coarse solution
'xxxx1xxx'	Almanac derived coarse solution
'xx01xxxx'	Adjusted QoP APM solution
'x1xxxxxx'	Reverse EE candidate
All others'	(Reserved)

WiFi-tagged coarse solution:

Position was not calculated from GPS pseudo-ranges but copied from an earlier, valid GPS fix associated with the same WiFi tag value reported to the SLC engine.

Almanac derived coarse solution:

Position was calculated based on one or more of the SVs having their states derived from almanac parameters as opposed to ephemerides.



This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

Adjusted QoP APM low power mode solution:

When the QoP specification in the originating POS_REQ can not be met any longer due to a low power transition request with conflicting QoP specification, POS_RESP messages are still generated while in the conflicting low power mode but the original POS_REQ QoP specification is overridden as specified for the new low power mode. This might happen after transitioning to APM low power mode.

Reverse EE candidate:

Reverse EE processing may be used for the data provided, which is populated in the measurement section and in the SV state section.

DGPS_COR DGPS correction type

The SLC shall set this field according to the following table.

Table 108: DGPS_COR Field Specification

DGPS_COR field Value	Correction Type
'00'	No DGPS correction
'01'	Local DGPS correction
'02'	WAAS correction
All others	Other Corrections (Reserved)

MEAS_GPS_WEEK Extended GPS week number

The SLC shall set this field to the extended number of GPS weeks since the beginning of the GPS reference, in binary format, in number of weeks.

Note 1: For the period from August 21st 1999 23:59:47, UTC time, to around midnight the night between April 7th 2019/April 8th 2019.

$$\text{MEAS_GPS_WEEK} = \text{GPS_WEEK NUMBER} + 1024$$

Where GPS_WEEK NUMBER is the equivalent unsigned binary value of the ten most significant bits of the Z-count found in the GPS satellites broadcast message.

The UTC time of the next rollover is given only approximately, as we don't know today how many extra leap seconds will have been introduced between UTC time and TAI time (International Atomic Time).

Note 2: The leap seconds are defined as TAI-UTC.
TAI-UTC=32s at 08/21/1999.

Note 3: As of 11/19/2008:

TAI is ahead of UTC by 33 seconds.
TAI is ahead of GPS by 19 seconds.
GPS is ahead of UTC by 14 seconds.



This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

MEAS_GPS_SECONDS GPS time in the week when the position was computed

The SLC shall set this field to the number of elapsed seconds since the beginning of the current GPS week, in binary format, in units of 1/1000 seconds, in the range from 0s to 604,799.999 seconds.

MEAS_LAT Measured Latitude

The SLC shall set this field to the two's complement value of the latitude, in units of $180/2^{32}$ degrees, in the range from -90 degrees to $+90 \times (1-2^{-31})$ degrees, referenced to the WGS84 reference ellipsoid, counting positive angles north of the equator, and negative angles south of the equator.

MEAS_LONG Measured Longitude

The SLC shall set this field to the two's complement value of the longitude, in units of $360/2^{32}$ degrees, in the range from -180 degrees to $+180 \times (1-2^{-31})$ degrees, referenced to the WGS84 reference ellipsoid, counting positive angles East of the Greenwich Meridian, and negative angles West of the Greenwich Meridian.


OTHER_SECTIONS Indicates the validity status of other sections

The SLC shall indicate what sections are valid in the message. All non valid sections are filled with zeros.

OTHER_SECTIONS consists of 8 bits; each of the bits represents one section. The mapping of the bits is listed in the following table. If a section is valid, the SLC shall set the corresponding bit to '1'; otherwise, the SLC shall set the corresponding bit to '0'. See table below for detailed specification.

Table 109: **OTHER_SECTIONS** Field Specification

Bits in OTHER_SECTIONS	Value	SECTION
Bit 0(LSB)	1: Valid 0: Not Valid	Horizontal Error Section
Bit 1	1: Valid 0: Not Valid	Vertical Position Section
Bit 2	1: Valid 0: Not Valid	Velocity Section
Bit 3	1: Valid 0: Not Valid	Clock Correction Section
Bit 4	1: Valid 0: Not Valid	Position Correction Section
Bit 5-7(MSB)	0	(Reserved)

 <p>SiRF A CSR plc Company</p>	<h2>One Socket Protocol ICD</h2> <div style="border: 2px solid red; padding: 5px; display: inline-block; margin: 10px 0;"> This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control. </div> <p>Revision 5.5 11/16/2009</p>
--	---

ER_EL_ANG Error Ellipse Angle

The SLC shall set this field to the binary value of the Error Ellipse major axis angle with respect to True North in WGS84. The units shall be $180/2^8$ degrees, with a range from 0 to $+180 \times (1-2^{-7})$ degrees, where 0 degrees is True North, and the angle is measured rotating toward the East.

MAJ_STD_ER Major Axis Standard Deviation Error

The SLC shall set this field to the Standard Deviation along the axis specified by the ER_EL_ANG field. The GPS shall set this field according to the following table.

Table 110: MAJ_STD_ER Field Specification

Exponent X	Mantissa Y	Index value I= Y + 16 X	Floating Point Value f_i	Estimated Horizontal Error (meters)
0000	0000	0	0.125	< 0.125
0000	0001	1	0.1328125	$0.125 < \sigma < 0.1328125$
X	Y	$2 \leq I \leq 253$	$0.125 (1 + Y/16) \times 2^X$	$f_{i-1} \leq \sigma < f_i$
1111	1110	254	7680	$7424 \leq \sigma < 7680$
1111	1111	255	Not Applicable	≥ 7680

MIN_STD_ER Minor Axis Standard Deviation Error

The SLC shall set this field to the Standard Deviation perpendicular to the axis specified by the ER_EL_ANG field according to the following table.

Table 111: MIN_STD_ER Field Specification

Exponent X	Mantissa Y	Index value I= Y + 16 X	Floating Point Value f_i	Estimated Horizontal Error (meters)
0000	0000	0	0.125	< 0.125
0000	0001	1	0.1328125	$0.125 < \sigma < 0.1328125$
X	Y	$2 \leq I \leq 253$	$0.125 (1 + Y/16) \times 2^X$	$f_{i-1} \leq \sigma < f_i$
1111	1110	254	7680	$7424 \leq \sigma < 7680$
1111	1111	255	Not Applicable	≥ 7680

HEIGHT Height

Units of 0.1 m in the range of -500 m to +6053.5 m with respect to WGS84 reference ellipsoid, in Unsigned Binary Offset coding. The formula to apply is:

$$\text{HEIGHT (in m)} = B \times 0.1 - 500$$

where B is the unsigned binary value of the "HEIGHT" field from 0 to 65535.

"all zeros" represents -500m, "all ones" represents +6053.5m.



This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

HEIGHT_STD_ER Height Standard Deviation Error

The SLC shall set this field to the Vertical Error Standard Deviation as specified in the table below.

Table 112: HEIGHT_STD_ER Field Specification

Exponent X	Mantissa Y	Index value I= Y + 16 X	Floating Point Value f_i	Estimated Vertical Error (meters)
0000	0000	0	0.125	< 0.125
0000	0001	1	0.1328125	$0.125 < \sigma < 0.1328125$
X	Y	$2 \leq I \leq 253$	$0.125 (1 + Y/16) \times 2^X$	$f_{i+1} \leq \sigma < f_i$
1111	1110	254	7680	$7424 \leq \sigma < 7680$
1111	1111	255	Not Applicable	≥ 7680

HOR_VEL Horizontal Velocity

The SLC shall set this field to the horizontal velocity, in units of 0.0625 meters/second, in the range from 0 to 4095 m/s

HEADING Heading

The SLC shall set this field to the velocity heading, in units of $360/2^{16}$ degrees, in the range from 0 to $360 \times (1-2^{-16})$ degrees. '0' degrees is True North, and the angle increases towards the East.

VER_VEL: Vertical Velocity

The SLC shall set this field to the two's complement value of Vertical Velocity, in units of 0.5m/s in the range from -64m/s to +63.5 m/s.

VEL_ER_EL_ANG Error Ellipse Angle

The SLC shall set this field to the binary value of the Error Ellipse major axis angle with respect to True North in WGS84. The units shall be 0.75 degrees, with a range from 0 to $+180 \times (1-2^{-7})$ degrees, where 0 degrees is True North, and the angle is measured rotating toward the East.

VEL_MAJ_STD_ER Major Axis Standard Deviation Error

The SLC shall set this field to the Standard Deviation along the axis specified by the ER_EL_ANG field. The SLC shall set this field according to the table below.

DRAFT


 SiRF <small>A CSR plc Company</small>	One Socket Protocol ICD
	<div style="border: 2px solid red; padding: 5px; display: inline-block;"> This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control. </div> Revision 5.5 11/16/2009

Table 113: VEL_MAJ_STD_ER Field Specification

Exponent X	Mantissa Y	Index value I= Y + 16 X	Floating Point Value f_i	Estimated Horizontal Velocity Error (meters/second)
0000	0000	0	0.125	< 0.125
0000	0001	1	0.1328125	$0.125 < \sigma < 0.1328125$
X	Y	$2 \leq I \leq 253$	$0.125 (1 + Y/16) \times 2^X$	$f_{i-1} \leq \sigma < f_i$
1111	1110	254	7680	$7424 \leq \sigma < 7680$
1111	1111	255	Not Applicable	≥ 7680 or unknown

VEL_MIN_STD_ER Minor Axis Standard Deviation Error

The SLC shall set this field to the Standard Deviation perpendicular to the axis specified by the ER_EL_ANG field. The SLC shall set this field according to the following table.

Table 114: VEL_MIN_STD_ER Field Specification

Exponent X	Mantissa Y	Index value I= Y + 16 X	Floating Point Value f_i	Estimated Horizontal Velocity Error (meters/second)
0000	0000	0	0.125	< 0.125
0000	0001	1	0.1328125	$0.125 < \sigma < 0.1328125$
X	Y	$2 \leq I \leq 253$	$0.125 (1 + Y/16) \times 2^X$	$f_{i-1} \leq \sigma < f_i$
1111	1110	254	7680	$7424 \leq \sigma < 7680$
1111	1111	255	Not Applicable	≥ 7680 or unknown

VER_VEL_STD_ER Height Standard Deviation Error

The SLC shall set this field to the Vertical Error Standard Deviation as specified in the table below.

Table 115: VER_VEL_STD_ER Field Specification

Exponent X	Mantissa Y	Index value I= Y + 16 X	Floating Point Value f_i	Estimated Vertical Velocity Error (meters/second)
0000	0000	0	0.125	< 0.125
0000	0001	1	0.1328125	$0.125 < \sigma < 0.1328125$
X	Y	$2 \leq I \leq 253$	$0.125 (1 + Y/16) \times 2^X$	$f_{i-1} \leq \sigma < f_i$
1111	1110	254	7680	$7424 \leq \sigma < 7680$
1111	1111	255	Not Applicable	≥ 7680 or unknown

DRAFT

 <p>SiRF A CSR plc Company</p>	One Socket Protocol ICD <div style="border: 2px solid red; padding: 5px; display: inline-block; color: red; font-weight: bold;">This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control.</div> Revision 5.5 11/16/2009
---	---

TIME_REF Time reference in clock computation

The SLC shall set this field to '0' to indicate the tie reference is the local clock. '1' value is reserved.

CLK_BIAS Clock Bias

The SLC shall set this field to the clock bias, in the range from -429.287 seconds to +429.287 seconds with a minimum non-zero value of 100ns. A "floating-point" representation is used where the most significant bit is the sign, the following 5 most significant bits constitute the exponent and the 10 least significant bits constitute the mantissa.

With

S being "0" or "1"

X being the binary value of the exponent field, (0≤X≤31)

Y being the binary value of the mantissa field, (0≤Y≤1023)

The CLOCK_BIAS parameter is given in units of 1 second by the formula:

$$\text{CLK_BIAS} = (-1)^S \cdot 100 \cdot 10^{-9} (1 + Y/1024) \cdot 2^X \text{ seconds}$$

CLK_DRIFT Clock Drift

The SLC shall set this field to the clock drift in the range of -327.52ppm (or us/s) to +327.52 ppm, with a minimum non-zero value of 0.0025ppm. A "floating-point" representation is used where the most significant bit is the sign, the following 4 most significant represent the exponent, and the 11 least significant bits constitute the mantissa.

With

S being "0" or "1"

X being the binary value of the exponent field, (0≤X≤15)

Y being the binary value of the mantissa field, (0≤Y≤2047)

The CLOCK_BIAS parameter is given in units of 1 part-per-million (or us/s) by the formula:

$$\text{CLK_DRIFT} = (-1)^S \cdot 5 \cdot 10^{-3} (1 + Y/2048) \cdot 2^X \text{ ppm}$$

CLK_STD_ER Estimated Time Accuracy.

The SLC shall set this field as defined in the table below.

 <p>SiRF A CSR plc Company</p>	<p>One Socket Protocol ICD</p> <div style="border: 2px solid red; padding: 5px; display: inline-block;"> <p>This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control.</p> </div> <p>Revision 5.5 11/16/2009</p>
--	---

Table 116: CLK_STD_ER Field Specification

Exponent X	Mantissa Y	Index value I= Y + 16 X	Floating Point Value f_i	Estimated Time Accuracy (Microseconds)
0000	0000	0	0.125	< 0.125
0000	0001	1	0.1328125	$0.125 < \sigma < 0.1328125$
X	Y	$2 \leq I \leq 253$	$0.125 (1 + Y/16) \times 2^X$	$f_{i-1} \leq \sigma < f_i$
1111	1110	254	7680	$7424 \leq \sigma < 7680$
1111	1111	255	Not Applicable	≥ 7680

UTC_OFF The offset between GPS time and UTC time in units of seconds.

The SLC shall set this field to the value of the offset between GPS time and UTC time at the time of location computation in units of seconds: range of 0-255 seconds.

NB_SV Number of Satellite Vehicles Currently Tracked

For MS-Based mode,

The SLC shall set this field to the number of GPS satellites currently tracked, in the range from 1 to 10, where the binary value of the field conveys the number of satellites.

SV_PRN Satellite PRN number

For MS-Based mode,

The SLC shall set this field to the value of the PRN signal number of the SV which is being tracked. It is represented as an unsigned value in the range from 1 to 32, where the binary value of the field conveys the satellite PRN number.

C_N0 Satellite C/N0

The SLC shall set this field to the C/N0 value in units of 1 dB-Hz in the range from 0 to 60, in Unsigned binary format.

DRAFT



One Socket Protocol ICD

This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

INV_WEIGHTS Inverse of Weighting Factor in position computation

For MS-Based mode,

This field has a dual purpose:

- to report whether the satellite is used in the position fix,
- if it used in the fix, the value of the inverse weighting factor.

If the satellite is not used in the fix, INV_WEIGHTS shall be set to "0".

If the satellite is used in the fix, SLC shall set INV_WEIGHTS to the inverse of the weighting factor used for the satellite, in the range from 0.125 to 3968m. A "floating-point" representation is used where the 4 most significant bits constitute the exponent and the 4 least significant bits constitute the mantissa as specified in the table below.

Table 117: INV_WEIGHTS Field Specification

Exponent X	Mantissa Y	Index value $I = Y + 16 X$	Floating Point Value f_i	Inverse Weighting Factor (meters)
0000	0000	0	0.125	< 0.125
0000	0001	1	0.1328125	$0.125 < \sigma < 0.1328125$
X	Y	$2 \leq I \leq 253$	$0.125 (1 + Y/16) \times 2^X$	$f_{i-1} \leq \sigma < f_i$
1111	1110	254	7680	$7424 \leq \sigma < 7680$
1111	1111	255	Not Applicable	≥ 7680

DRAFT



This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

6.2 Measurement Response

Table 118: Measurement Response Message Definition

MID (Hex)	0x45
MID (Dec)	69
Message Name in Code	MID_POS_MEAS_RESP
SID (Hex)	0x02
SID (Dec)	2
SID Name in Code	MEAS_RESP

Table 119: Measurement Response Message

Field	Length(bits)	
Message ID	8	
Message Sub ID	8	
POS_REQ_ID	8 bits	
MEASURE- MENT SECTION	GPS_MEAS_FLAG	8 bits
	MEAS_ERROR_STATUS	8 bits
	MEAS_GPS_WEEK	16 bits
	MEAS_GPS_SECONDS	32 bits
	TIME_ACCURACY	8 bits
	NUM_SVS	8 bits
	The following fields are repeated a number of times indicated by the value of the NUM_SVS field.	
	SV_PRN	8 bits
	C_NO	8 bits
	SV_DOPPLER	16 bits
	SV_CODE_PHASE_WH	16 bits
	SV_CODE_PHASE_FR	16 bits
	MULTIPATH_INDICATOR	8 bits
	PSEUDORANGE_RMS_ERROR	8 bits

POS_REQ_ID Position/measurement request identifier
This is the POS_REQ_ID (sent in a request) that the returned position/measurements are associated with.

GPS_MEAS_FLAG GPS Measurement Flag

If set to 0x00, all fields of the GPS measurement section from MEAS_ERROR_STATUS to PSEUDORANGE_RMS_ERROR are invalid and must be set to zero. No GPS measurement information is delivered. If set to 0x01, some fields in the GPS measurement section are valid.

MEAS_ERROR_STATUS GPS Measurement Error Status

If set to 0x00, GPS measurement information is delivered and the MEASUREMENT SECTION is valid. If set to any other value, the MEASUREMENT SECTION is invalid and must be set all zeros. The non zero value provides information about the reason of the "no GPS measurement delivered" information, according to the table below.

DRAFT



One Socket Protocol ICD

This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

Table 120: MEAS_ERROR_STATUS Field

MEAS_ERROR_STATUS Value	Description
0x00	Valid GPS Measurements
0x01	No Enough Satellites Tracked
0x02	GPS Aiding Data Missing
0x03	Need More Time
0x04 – 0xFE	Reserved
0xFF	Requested Location Method Not Supported

TIME_ACCURACY Accuracy of GPS Measurement Time Tag

The SLC shall set this field to the estimated accuracy of GPS measurement time tag according to the table below.

Table 121: TIME_ACCURACY Field

Exponent X	Mantissa Y	Index value I= Y + 16 X	Floating Point Value f_i	Accuracy (Milliseconds)
0000	0000	0	1.0	< 1.0
0000	0001	1	1.0625	$1.0 < \sigma < 1.0625$
X	Y	$2 \leq I \leq 253$	$1.0 (1 + Y/16) \times 2^X$	$f_{i-1} \leq \sigma < f_i$
1111	1110	254	61440	$59392 \leq \sigma < 61440$
1111	1111	255	Not Applicable	≥ 61440

NUM_SVS Number of Satellite Measurements

The SLC shall set this field to the number of valid GPS measurements included in MEASUREMENT SECTION. It is represented an unsigned value in the range from 1 to 32, where the binary value of the field conveys the number of measurements. The valid value is from 1 to 16.

SV_DOPPLER Satellite Doppler Measurement

The SLC shall set this field to the two's complement value of the measured Doppler, in units of 0.2 Hz, in the range from -6,553.6 Hz to +6,553.6 Hz.

SV_CODE_PHASE_WH Satellite Code Phase Measurement – Whole Chips

The SLC shall set this field to the satellite code phase measured as a number of C/A code chips, in units of 1 C/A code chip, in the range from 0 to 1022 chips.

SV_CODE_PHASE_FR Satellite Code Phase Measurement – Fractional Chips

The SLC shall set this field to the fractional value of the satellite code phase measurement, in units of 2^{-10} of C/A code chips, in the range from 0 to $(2^{10}-1)/2^{10}$ chips.

MULTIPATH_INDICATOR Multipath Indicator

The SLC shall set this field to the value shown in the table below.

CS-129291-DC2	© SiRF Technology, Inc., a member of the CSR plc group of companies 2009 This material is subject to SiRF's non-disclosure agreement.	Page 134 of 251
---------------	--	-----------------

DRAFT



This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

Table 122: MULTIPATH_INDICATOR Field

MULTIPATH_INDICATOR Value	Description
'00000000'	Not Measured
'00000001'	Low, Multipath Error ≤ 5 meters
'00000010'	Medium, $5 < \text{Multipath Error} \leq 43$ meters
'00000011'	High, Multipath Error > 43 meters
'00000100' – '11111111'	Reserved

PSEUDORANGE_RMS_ERROR Pseudorange RMS Error

The SLC shall set this field to the pseudorange RMS error, in the range from 0.5m to 112m. A “floating-point” representation is used where the 3 least significant bits (Bit 0, 1, and 2) constitute the mantissa and Bit 3, 4, and 5 constitute the exponent as specified in the table below.

Table 123: Pseudorange RMS Error Representation

Exponent, X	Mantissa, Y	Index Value, $i=Y+8X$	Floating-Point Value, f_i	Pseudorange RMS Error, P (m)
'000'	'000'	0	0.5	$P < 0.5$
'000'	'001'	1	0.5625	$0.5 \leq P < 0.5625$
X	Y	$2 \leq P \leq 61$	$0.5(1+Y/8)2^X$	$f_{i-1} \leq P < f_i$
'111'	'110'	62	112	$104 \leq P < 112$
'111'	111'	63	Not Applicable	$112 \leq P$

6.3 Ephemeris Status Response

Table 124: Ephemeris Status Response Message Definition

MID (Hex)	0x46
MID (Dec)	70
Message Name in Code	MID_STATUS_RESP
SID (Hex)	0x01
SID (Dec)	1
SID Name in Code	EPH_RESP

The “Ephemeris Status Response” message is output in response to “Ephemeris Status Request” message. There is at least one solicited “Ephemeris Status Response” output message sent in response to a received “Ephemeris Status Request” input message. Optionally, several more unsolicited “Ephemeris Status Response” output messages can follow the solicited response message, while the current session is open.



This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

Table 125: Ephemeris Status Response Message

Field	Bytes	Scale	Unit
Message ID	1		
Message Sub ID	1		
GPS_TIME_FLAG	1		
EXTD_GPS_WEEK	2		
GPS_TOW	4		
EPH_STATUS_TYPE	1		
GPS_T_TOE_LIMIT	1		
NUM_SVS	1		
The following structure should repeat a number of times as indicated by the value of the "NUM_SVS" field above.			
SATID	1		
SAT_INFO_FLAG	1		
GPS_WEEK	2		
GPS_TOE	2		
IODE	1		
AZIMUTH	2		
ELEVATION	1		

GPS_TIME_FLAG Flag for the GPS time section
 Bit0 -> isExtdGPSWeekValid {0,1} = {FALSE, TRUE}
 Bit1 -> isGPSTOWValid {0,1} = {FALSE, TRUE}

EXTD_GPS_WEEK Extended GPS week number
 The SLC shall fill in the current GPS week. This field is only valid if isExtdGPSWeekValid (GPS_TIME_FLAG) is TRUE.

GPS_TOW GPS time of week
 The SLC shall fill in the current GPS time of week in the unit of 0.1 seconds. This field is only valid if isGPSTOWValid (GPS_TIME_FLAG) is TRUE.

EPH_STATUS_TYPE The type of ephemeris status report
 If set to 1 -> Aiding server shall make the decision on what to send. The SLC does not provide parameters from "GPS T-TOE Limit" to the "SatList" structure. The server can send all available in visible list, or all satellites that the server has.

If set to 3, "Status Report" -> The SLC shall fill parameters from "GPS T-TOE Limit" to the "SatList" structure with the current satellite states in SLC. The SLC may fill each SatList element partially or fully based on the information it has about the satellite:

- SATID=0 implies that the SLC has no ephemeris information about the satellite
- SATID only
- SATID with GPS_WEEK, GPS_TOE, IODE
- SATID with GPS_WEEK, GPS_TOE, IODE, AZIMUTH & ELEVATION
- SATID with AZIMUTH and ELEVATION

The CP or the server shall decide on what aiding to send based on this information.

All other values are invalid.

 <p>SiRF A CSR plc Company</p>	<p>One Socket Protocol ICD</p> <div style="border: 2px solid red; padding: 5px; display: inline-block;"> <p>This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control.</p> </div> <p>Revision 5.5 11/16/2009</p>
--	---

- GPS_T_TOE_LIMIT** Tolerance of the TOE age.
GPS time of ephemeris time tolerance, in unit of hours. The valid range is from 0 to 10. This parameter is currently set to 2.
- NUM_SVS** Number of satellites
This is the number of satellites for which ephemeris status parameters are given by this message.
- SATLIST** A structure that contains satellite ephemeris status information
This is a structure containing the following sub-elements
This structure can be repeated up to 32 times.
- SATID** The satellite ID (PRN number)
A value of zero means SATID is invalid.
- SAT_INFO_FLAG** The satellite info flag
If this flag is set to 0, the parameters from GPS_WEEK to ELEVATION are not valid.

If bit 0 of this flag is set to 1, the parameters from GPS_WEEK to IODE are valid.
If bit 1 of this flag is set to 1, the parameters from AZIMUTH to ELEVATION are valid.
Otherwise, the specified parameters are not valid.
If bit 2 (SLC_EPH_REQ) is set to 1, the corresponding satellite requires ephemeris aiding as determined by the SLC internal algorithm.
- GPS_WEEK** The GPS week number
The GPS week of the ephemeris in SLC for SATID. Value={0...1023}
For an invalid satellite, this value should be set to 0.
- GPS_TOE** The GPS time of ephemeris
GPS time of ephemeris in hours of the latest ephemeris set contained by the SLC for satellite SATID.
For an invalid satellite, this value should be set to 0.
- IODE** The issue of data of ephemeris
Issue of Data Ephemeris for SATID.
For an invalid satellite, this value should be set to 0.
- AZIMUTH** Azimuth angle of the GPS satellite
The SLC shall set this field to the azimuth, in units of 1 degree. The valid value is from 0 to 359 degrees. The CP shall set this field to 0xFFFF if the azimuth angle is unknown.
- ELEVATION** Elevation angle of the GPS satellite
The SLC shall set this field to the elevation angle, in units of 1 degree. The valid value is form -90 to 90 degrees. The CP shall set this field to 0xFF if the elevation angle is unknown


6.4 ACK/NACK/ERROR Notification

Table 126: ACK/NACK/ERROR Notification Message Definition

MID (Hex)	0x4B
MID (Dec)	75
Message Name in Code	MID_MSG_ACK_OUT
SID (Hex)	0x01
SID (Dec)	1
SID Name in Code	ACK_NACK_ERROR

CS-129291-DC2	© SiRF Technology, Inc., a member of the CSR plc group of companies 2009 This material is subject to SiRF's non-disclosure agreement.	Page 137 of 251
---------------	--	-----------------

DRAFT

 SiRF A CSR plc Company	One Socket Protocol ICD
	Revision 5.5 11/16/2009

This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Table 127: ACK/NACK/ERROR Notification Message

Field	Bytes	Scale	Unit
Message ID	1		
Message Sub ID	1		
Echo Message ID	1		
Echo Message Sub ID	1		
ACK/NACK/ERROR	1		
Reserved	2		

Table 128: ACK/NACK/ERROR Field Description

Value	Description
0x00	Acknowledgement
0x01 – 0xF9	Reserved
0xFA	Message ID and/or Message Sub ID not recognized
0xFB	Parameters cannot be understood by the recipient of the message
0xFC	OSP Revision Not Supported
0xFD	CP doesn't support this type of NAV bit aiding (0 during autonomous operation)
0xFE	CP doesn't accept ephemeris status response (0 during autonomous operation)
0xFF	Non-acknowledgement

Note: At the time of releasing the 4t product, the support of this message for use by new 4t applications will coexist with the support of the SSB ACK (0x0B) and SSB NACK (0x0C) messages for use by legacy applications of earlier products.

6.5 Almanac Response

Table 129: Almanac Response Message Definition

MID (Hex)	0x46
MID (Dec)	70
Message Name in Code	MID_STATUS_RESP
SID (Hex)	0x02
SID (Dec)	2
SID Name in Code	ALM_RESP

The "Almanac Response" message is output in response to "Almanac Request" message.

DRAFT


 <p>SiRF A CSR plc Company</p>	<h2>One Socket Protocol ICD</h2> <div style="border: 2px solid red; padding: 5px; display: inline-block; margin: 10px 0;"> <p>This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control.</p> </div> <p>Revision 5.5 11/16/2009</p>
--	--

Table 130: Almanac Response Fields

Field	Length (nr of Bits)	Scale Factor	Unit
Message ID	8		
Message Sub ID	8		
ALM_DATA_FLAG	8	N/A	N/A
EXTD_GPS_WEEK	16	N/A	weeks
GPS_TOW	32	0.1	seconds
NUM_SVS	8		
The structure of almanac parameters below shall repeat a number of times as indicated by the value of the NUM_SVS field above.			
ALM_VALID_FLAG	8	N/A	N/A
ALM_SV_PRN_NUM	8	N/A	N/A
ALM_WEEK_NUM	16	N/A	N/A
ALM_ECCENTRICITY	16	2^{-21}	dimensionless
ALM_TOA	8	2^{12}	Seconds
ALM_DELTA_INCL	16 ⁽¹⁾	2^{-19}	semi-circles
ALM_OMEGADOT	16 ⁽¹⁾	2^{-38}	semi-circles/sec.
ALM_A_SQRT	24	2^{-11}	meters ^{1/2}
ALM_OMEGA_0	24 ⁽¹⁾	2^{-23}	semi-circles
ALM_OMEGA	24 ⁽¹⁾	2^{-23}	semi-circles
ALM_M0	24 ⁽¹⁾	2^{-23}	semi-circles
ALM_AF0	16 ⁽¹⁾	2^{-20}	Seconds
ALM_AF1	16 ⁽¹⁾	2^{-38}	sec/sec

All parameters (from ALM_VALID_FLAG to ALM_AF1) have the same definition as the ones defined in Section 6.1 (AI3 Request) except that ALM_WEEK_NUM is the week number of the corresponding sub-almanac.

ALM_DATA_FLAG Flag for each data section
 Bit 0 -> isAlmanacValid {0,1} = {No almanac data, at least one sub-almanac present in the message}
 Bit1 -> isExtdGPSWeekValid {0,1} = {FALSE, TRUE}
 Bit2 -> isGPSTOWValid {0,1} = {FALSE, TRUE}

EXTD_GPS_WEEK Extended GPS week number
 The SLC shall fill in the current GPS week. This field is only valid if isExtdGPSWeekValid (ALM_DATA_FLAG) is TRUE.

GPS_TOW GPS time of week
 The SLC shall fill in the current GPS time of week in the unit of 0.1 seconds. This field is only valid if isGPSTOWValid (ALM_DATA_FLAG) is TRUE.

NUM_SVS Number of satellites
 This is the number of satellites for which almanac information is being given with this message.

 <p>SiRF A CSR plc Company</p>	<p>One Socket Protocol ICD</p> <div style="border: 2px solid red; padding: 5px; display: inline-block;"> <p>This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control.</p> </div> <p>Revision 5.5 11/16/2009</p>
--	---

6.6 Broadcast Ephemeris Response

Table 131: Broadcast Ephemeris Response Message Definition.


MID (Hex)	0x46
MID (Dec)	70
Message Name in Code	MID_STATUS_RESP
SID (Hex)	0x03
SID (Dec)	3
SID Name in Code	B_EPH_RESP

The "Broadcast Ephemeris Response" message is output in response to "Broadcast Ephemeris Request" message.

Table 132: Broadcast Ephemeris Response Message Fields

Field	Length (bits)	Scale Factor	Unit
Message ID			
Message Sub ID			
RESERVED	8	N/A	N/A
IONO_FLAG	8	N/A	N/A
ALPHA_0	8 ⁽¹⁾	2 ⁻³⁰	Seconds
ALPHA_1	8 ⁽¹⁾	2 ⁻²⁷	sec/semi-circles
ALPHA_2	8 ⁽¹⁾	2 ⁻²⁴	sec/(semi-circles) ²
ALPHA_3	8 ⁽¹⁾	2 ⁻²⁴	sec/(semi-circles) ³
BETA_0	8 ⁽¹⁾	2 ¹¹	Seconds
BETA_1	8 ⁽¹⁾	2 ¹⁴	sec/semi-circles
BETA_2	8 ⁽¹⁾	2 ¹⁶	sec/(semi-circles) ²
BETA_3	8 ⁽¹⁾	2 ¹⁶	sec/(semi-circles) ³
TIME_FLAG	8	N/A	N/A
EXTD_GPS_WEEK	16	1	Week
GPS_TOW	32	0.1	Seconds
NUM_SVS	8		
The following fields are repeated a number of times indicated by the value of the NUM_SVS field above.			
EPH_FLAG	8	N/A	N/A
HEALTH	8	N/A	N/A
GPS_WEEK	16	N/A	N/A
SV_PRN_NUM	8	N/A	N/A
URA_IND	8	N/A	N/A
IODE	8	N/A	N/A

DRAFT

 <p>SiRF A CSR plc Company</p>	<h2>One Socket Protocol ICD</h2> <div style="border: 2px solid red; padding: 5px; display: inline-block; margin: 10px 0;"> <p style="color: red; font-size: small;">This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control.</p> </div> <p>Revision 5.5 11/16/2009</p>
--	--

C_RS	16 ⁽¹⁾	2 ⁻⁵	Meters
DELTA_N	16 ⁽¹⁾	2 ⁻⁴³	semi-circles/sec
M0	32 ⁽¹⁾	2 ⁻³¹	semi-circles
C_UC	16 ⁽¹⁾	2 ⁻²⁹	Radians
ECCENTRICITY	32	2 ⁻³³	N/A
C_US	16 ⁽¹⁾	2 ⁻²⁹	Radians
A_SQRT	32	2 ⁻¹⁹	\sqrt{meters}
TOE	16	2 ⁴	Seconds
C_IC	16 ⁽¹⁾	2 ⁻²⁹	Radians
OMEGA_0	32 ⁽¹⁾	2 ⁻³¹	semi-circles
C_IS	16 ⁽¹⁾	2 ⁻²⁹	Radians
ANGLE_INCLINATION	32 ⁽¹⁾	2 ⁻³¹	semi-circles
C_RC	16 ⁽¹⁾	2 ⁻⁵	Meters
OMEGA	32 ⁽¹⁾	2 ⁻³¹	semi-circles
OMEGADOT	32 ⁽¹⁾	2 ⁻⁴³	semi-circles/sec
IDOT	16 ⁽¹⁾	2 ⁻⁴³	semi-circles/sec
TOC	16	2 ⁴	Seconds
T_GD	8 ⁽¹⁾	2 ⁻³¹	Seconds
AF2	8 ⁽¹⁾	2 ⁻⁵⁵	sec/sec ²
AF1	16 ⁽¹⁾	2 ⁻⁴³	sec/sec
AF0	32 ⁽¹⁾	2 ⁻³¹	Seconds

TIME_FLAG Time parameter validity flag.

The SLC shall set this field to 1 if the following fields from EXTD_GPS_WEEK to GPS_TOW are valid. If the fields are not valid, the SENDER shall set this field and the following fields from EXTD_GPS_WEEK to GPS_TOW to 0.

EXTD_GPS_WEEK Extended GPS week number

This is the extended GPS week number of the current time of the current time inside the SLC.

GPS_TOW GPS time of week

This is the time of week in unit of 0.1 seconds of the current time inside the SLC.

NUM_SVS Number of satellites

This is the number of satellites for which broadcast ephemeris is being given with this message. This needs to match the NUM_SVS field of the "Broadcast Ephemeris Request" message, for which this is the response pair.


Please see "A13 Request" (Section 6.1) for description of all other fields.

HEALTH Broadcast Ephemeris Health

This field is used to indicate the health of the satellite. A value of 0 means the satellite is health, a value of 1 means the satellite is unhealthy.

CS-129291-DC2	© SiRF Technology, Inc., a member of the CSR plc group of companies 2009 This material is subject to SiRF's non-disclosure agreement.	Page 141 of 251
---------------	--	-----------------

DRAFT

 <p>SiRF A CSR plc Company</p>	<p>One Socket Protocol ICD</p> <div style="border: 2px solid red; padding: 5px; display: inline-block;"> <p>This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control.</p> </div> <p>Revision 5.5 11/16/2009</p>
--	---

6.7 Verified 50 bps Broadcast Ephemeris and Iono Data

Table 133: Verified 50 bps Broadcast Ephemeris Data Message Definition.

MID (Hex)	0x38
MID (Dec)	56
Message Name in Code	SSB_EE
SID (Hex)	0x05
SID (Dec)	5
SID Name in Code	SSB_EE_X-CORR_FREE

This message sends verified data containing broadcast ephemeris and iono parameters for Ephemeris Extension. The payload of this message is 42 bytes long, similarly to SiRF Binary Message 8, which contains 50 bps data in standard GPS ICD format. The payload here has the following sub-frames:

- 1) Sub-frames 1, 2 and 3 containing broadcast ephemeris data that is verified to be free from cross-correlation and verified to have broadcast ephemeris with good health. These sub-frames would be sent per SV each time when a new broadcast ephemeris is received and is verified to be free from cross-correlation and in good health.
- 2) Sub-frame 4 containing Klobucher ionospheric model parameters. This would be sent once only.
- 3) Sub-frame 5 will not be present.

Table 134: Verified 50 bps Broadcast Ephemeris Message Structure

Field	Bytes	Scale	Unit
Message ID	U1		
Message Sub ID	U1		
Channel	U1		
SV ID	U1		
Word[10]	U4		

6.8 Session Opening Response

Table 135: Session Open Message Definition

MID (Hex)	0x4A
MID (Dec)	74
Message Name in Code	MID_SESSION_CONTROL_RESP
SID (Hex)	0x01
SID (Dec)	1
SID Name in Code	SESSION_OPEN_RESP

The "Session Opening Notification" message is output in response to "Session Opening Request" message. Each time a "Session Opening Request" message is received, a "Session Opening Notification" message or a "Reject" message should be sent.

DRAFT


 SiRF A CSR plc Company	One Socket Protocol ICD
<div style="border: 2px solid red; padding: 5px; display: inline-block;">This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control.</div>	
Revision 5.5 11/16/2009	

Table 136: Session Opening Notification

Field	Bytes	Scale	Unit
Message ID	1		
Message Sub ID	1		
SESSION_OPEN_STATUS	1		

SESSION_OPEN_STATUS: Session Open Status
The field shall be set to an appropriate value as specified in the table below.

Table 137: SESSION_OPEN_STATUS Field Description

Value	Description
0x00	Session Opening succeeded.
0x01	Session Opening failed
0x02 to 0x7F	Reserved
0x80	Session Resume succeeded
0x81	Session Resume failed
0x82 to 0xFF	Reserved

6.9 Client Status Response

Table 138: Client Status Response

MID (Hex)	0x46
MID (Dec)	70
Message Name in Code	MID_STATUS_RESP
SID (Hex)	0x06
SID (Dec)	6
SID Name in Code	CLIENT_STATUS_RESP

Table 139: Client Status message

Field	Bytes	Scale	Unit
Message ID	1		
Message Sub ID	1		
STATUS	1		

STATUS Client Status
This field shall be set to the appropriate value as specified in the table below.

DRAFT

 <p>SiRF A CSR plc Company</p>	<p>One Socket Protocol ICD</p> <div style="border: 2px solid red; padding: 5px; display: inline-block; margin-bottom: 10px;"> <p style="color: red; font-size: small;">This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control.</p> </div> <p>Revision 5.5 11/16/2009</p>
--	--

Table 140: STATUS Field Specification

Bits in STATUS	Description
Bit 7-1: STATUS BITS	'xxxxx1'0x01: No fix available after full search 'xxxx10x': OK to send (SLC ready to receive message, e.g. wake-up from standby mode) 'xxxx01x': NOT OK to send (SLC not ready to receive message, e.g. in standby mode during trickle power).
Bit 8: EXTENSION BIT	'0': no byte extension '1': reserved

Bit 7-1: STATUS BITS

This field contains a bit pattern describing one of the SLC status events

Bit 8: EXTENSION BIT

In the future, this bit will be used as a condition reporting extension mechanism. For this version the only acceptable value is '0' (no extensions)

6.10 Session Closing Notification

Table 141: Session Close Notification Message Definition

MID (Hex)	0x4A
MID (Dec)	74
Message Name in Code	MID_SESSION_CONTROL_RESP
SID (Hex)	0x02
SID (Dec)	2
SID Name in Code	SESSION_CLOSE_RESP

The "Session Closing Notification" message is output in response to "Session Closing Request" message. Each time a "Session Closing Request" message is received, a "Session Closing Notification" message or a "Reject" message should be sent.

Table 142: Session Closing Notification message

Field	Bytes	Scale	Unit
Message ID	1		
Message Sub ID	1		
SESSION_CLOSE_STATUS	1		

SESSION_CLOSE_STATUS: Session closing status.

This field shall be set to an appropriate value as specified in the table below.


 <p>SiRF A CSR plc Company</p>	<p>One Socket Protocol ICD</p> <div style="border: 2px solid red; padding: 5px; display: inline-block;"> <p>This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control.</p> </div> <p>Revision 5.5 11/16/2009</p>
--	---

Table 143: SESSION_CLOSE_STATUS Field Specification

Value	Description
0x00	Session closed
0x01	Session closing failed
0x02 to 0x7F	Reserved
0x80	Session suspended
0x81	Session suspension failed
0x82 to 0xFF	Reserved

6.11 Hardware Configuration Request

Table 144: Hardware Configuration Message Definition

MID (Hex)	0x47
MID (Dec)	71
Message Name in Code	MID_HW_CONFIG_REQ

Table 145: Hardware Configuration Request message

Field	Bytes	Scale	Unit
Message ID	1		

6.12 Time Transfer Request


Table 146: Time Transfer Request Message Definition

MID (Hex)	0x49
MID (Dec)	73
Message Name in Code	MID_AIDING_REQ
SID (Hex)	0x02
SID (Dec)	2
SID Name in Code	TIME_TX_REQ

Request time transfer.

Table 147: Time Transfer Request message

Field	Bytes	Scale	Unit
Message ID	1		
Message Sub ID	1		

 <p>SiRF A CSR plc Company</p>	<p>One Socket Protocol ICD</p> <div style="border: 2px solid red; padding: 5px; display: inline-block; margin-bottom: 10px;"> <p style="color: red; font-size: small;">This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control.</p> </div> <p>Revision 5.5 11/16/2009</p>
--	--

6.13 Frequency Transfer Request

Table 148: Frequency Transfer Request Message Definition

MID (Hex)	0x49
MID (Dec)	73
Message Name in Code	MID_AIDING_REQ
SID (Hex)	0x03
SID (Dec)	3
SID Name in Code	FREQ_TX_REQ

Table 149: Frequency Transfer Request message

Field	Bytes	Scale	Unit
Message ID	1		
Message Sub ID	1		
FREQ_REQ_INFO	1		

FREQ_REQ_INFO Information field about frequency request

The SLC shall set this field according to the table below.

Table 150: "FREQ_REQ_INFO" field Description

Bits in FREQ_REQ_INFO	Value	Description
Bit 1(LSB)	"0": single request "1": multiple request	If "single request", only one response message is requested. Bit 2 is ignored If "multiple request", multiples responses are requested. Depending on Bit 2, this mode shall be turned ON or OFF
Bit 2	'1': "ON" "0": "OFF"	Valid only if Bit 1 is "1": If "ON", periodic "Frequency Transfer Response" mode is turned ON If "OFF", periodic "Frequency Transfer Response" mode is stopped
Bit 3	'0': don't turn off '1': turn off	'0' = Don't turn off reference clock '1' = Turn off reference clock
Bit 4 to 8	'0'	Reserved

 <p>SiRF A CSR plc Company</p>	<p>One Socket Protocol ICD</p> <div style="border: 2px solid red; padding: 5px; display: inline-block; margin-bottom: 10px;"> <p>This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control.</p> </div> <p>Revision 5.5 11/16/2009</p>
--	--

6.14 Approximate MS Position Request

Table 151: Approximate MS Position Request Message Definition

MID (Hex)	0x49
MID (Dec)	73
Message Name in Code	MID_AIDING_REQ
SID (Hex)	0x01
SID (Dec)	1
SID Name in Code	APPROX_MS_POS_REQ

Request approximate MS position.

Table 152: Approximate MS Position Request message

Field	Bytes	Scale	Unit
Message ID	1		
Message Sub ID	1		

6.15 Time_Frequency_Approximate_Position Status Response

Table 153: Time_Frequency_Approximate_Position Status Response Message Definition

MID (Hex)	0x46
MID (Dec)	70
Message Name in Code	MID_STATUS_RESP
SID (Hex)	0x04
SID (Dec)	4
SID Name in Code	TIME_FREQ_APPROX_POS_RESP

The "Time_Frequency_Approximate_Position Status Response" message is output in response to "Time_Frequency_Approximate_Position Status Request" message. Each time a "Time_Frequency_Approximate_Position Status Request" message is received, a "Time_Frequency_Approximate_Position Status Response" message or a "Reject" message should be sent.

Table 154: Time_Frequency_Approximate_Position Status Response message

Field	Bytes	Scale	Unit
Message ID	1		
Message Sub ID	1		
STATUS_RESP_MASK	1		
GPS_WEEK	2		
GPS_TOW	4		
STATUS_TIME_ACC_SCALE	1		
STATUS_TIME_ACCURACY	1		
STATUS_FREQ_ACC_SCALE	1		
STATUS_FREQ_ACCURACY	1		
STATUS_SCALED_FREQ_OFFSET	2		
STATUS_FREQ_TIME_TAG	4		
SLC_HOR_UNC	4		
SLC_VER_UNC	2		
SPARE	8		



This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

STATUS_RESP_MASK status response mask
When Bit 0 (LSB) of this mask is set to 1, GPS_WEEK is valid; 0 otherwise.
When Bit 1 of this mask is set to 1, GPS_TOW is valid; 0 otherwise.
When Bit 2 of this mask is set to 1, STATUS_TIME_ACC_SCALE and STATUS_TIME_ACCURARY are valid; 0 otherwise.
When Bit 3 of this mask is set to 1, STATUS_FREQ_ACC_SCALE and STATUS_FREQ_ACCURARY are valid; 0 otherwise.
When Bit 4 of this mask is set to 1, SLC_HOR_UNC is valid; 0 otherwise.
When Bit 5 of this mask is set to 1, SLC_VER_UNC is valid; 0 otherwise.

GPS_WEEK extended GPS week
This is the internal extended GPS week number.

GPS_TOW
This is the internal GPS_TOW time of the receiver, rounded to the nearest second.

STATUS_TIME_ACC_SCALE scale factor for the time accuracy status
This represents the scale factor used to encode the internal time accuracy of the receiver.
STATUS_TIME_ACC_SCALE=0 => time_scale = 1.0
STATUS_TIME_ACC_SCALE=1 => time_scale = 0.125
STATUS_TIME_ACC_SCALE=0xFF => internal time accuracy unknown
All other values are reserved.

STATUS_TIME_ACCURACY time accuracy status
This is the internal time accuracy of the receiver.
If time_scale (obtained from STATUS_TIME_ACC_SCALE) is 1.0, Table 43 shall be used to get the time accuracy.
If time_scale (obtained from STATUS_TIME_ACC_SCALE) is 0.125, Table 43 shall be used to get the time accuracy.
A value of 0xFF means "unknown accuracy"

STATUS_FREQ_ACC_SCALE scale factor of the frequency accuracy
This represents the scale factor used to encode the internal frequency accuracy of the receiver.
STATUS_FREQ_ACC_SCALE=0 => frequency_scale = 0.00390625
STATUS_FREQ_ACC_SCALE=0xFF => internal frequency accuracy unknown
All other values are reserved.

STATUS_FREQ_ACCURACY frequency accuracy status
This is the internal frequency accuracy of the receiver.
If frequency_scale (obtained from STATUS_FREQ_ACC_SCALE) is 0.00390625, Table 40 shall be used to get the frequency accuracy.
A value of 0xFF means "unknown accuracy"

STATUS_SCALED_FREQ_OFFSET Scaled frequency offset
This parameter to the scaled frequency offset as measured by the receiver. The interpretation of this parameter is the same as SCALED_FREQ_OFFSET in Section 5.24.

STATUS_FREQ_TIME_TAG Time tag of the frequency status
This field shall be set to the time when the frequency status measurement is taken. The unit and encoding of this parameter is the same as TIME_TAG used in Section 5.24.



This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

SLC_HOR_UNC

This field shall be set to the estimated horizontal uncertainty of the internal approximate position. The unit is 1 meter. A value of 0xFFFFFFFF means "unknown".

SLC_VER_UNC

This field shall be set to the estimated vertical uncertainty of the internal approximate MS location. The error shall correspond to the standard deviation of the error in MS altitude in units of 0.1 meters in the range of 0 meters to 6553.5 meters, in Unsigned Binary Offset coding. The formula to apply is:

$$EST_VER_ER \text{ (in m)} = V \times 0.1$$

where V is the unsigned binary value of the "EST_VER_ER" field from 0 to 65534. 0x0000 represents 0m, 0xFFFF represents "unknown".

6.16 ACK/NACK for Push Aiding Availability

Removed. There is no need for a separate ACK/NACK for this message. No additional information was proposed here from the ACK/NACK message in section 6.4.

6.17 Reject

Table 155: Reject Message Definition

MID (Hex)	0x4B
MID (Dec)	75
Message Name in Code	MID_MSG_ACK_OUT
SID (Hex)	0x02
SID (Dec)	2
SID Name in Code	REJECT

Table 156: Reject message

Field	Bytes	Scale	Unit
Message ID	1		
Message Sub ID	1		
REJ_MESS_ID	1		
REJ_MESS_SUB_ID	1		
REJ_REASON	1		

REJ_MESS_ID Message ID of Rejected Message

REJ_MESS_ID Message Sub ID of Rejected Message

REJ_REASON Reject Reason

The answering entity shall set this field to the reason of the reject according to the table below.



This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

Table 157: "REJ_REASON" field Description

Bit Number	Bit Value	Description
Bit 1 (LSB)	"1" true "0" false	(Reserved)
Bit 2	"1" true "0" false	Not Ready
Bit 3	"1" true "0" false	Not Available
Bit 4	"1" true "0" false	Wrongly formatted message(1)
Bit 5	"1" true "0" false	No Time Pulse during Precise Time Transfer
Bit 6		Unused
Bit 7-8	"0"	Reserved

6.18 Software Version Response

Table 158: Software Version Response Message Definition

MID (Hex)	0x06
MID (Dec)	6
Message Name in Code	MID_SWVersion

Using pre-existing SSB message (MID 6). This message will need to be modified to include the SiRF customer fields as indicated below. The "AI3" format of this message was chosen to exist versus the existing response to poll message since it was a superset of customer and SiRF version IDs whereas the existing SSB message 6 was only SiRF version IDs.

The "Software Version Response" message is output in response to "Software Version Request" message. Each time a "Software Version Request" message is received, a "Software Version Response" message or a "Reject" message should be sent.

Table 159: Software Version Response message

Field	Bytes	Scale	Unit
Message ID	1		
SIRF_VERSION_ID	[0...80] (variable)		
LENGTH SIRF_VERSION_ID	1		
LENGTH_CUSTOMER_VERSION_ID	1		
CUSTOMER_VERSION_ID	[0...80] (variable)		

CS-129291-DC2	© SiRF Technology, Inc., a member of the CSR plc group of companies 2009 This material is subject to SiRF's non-disclosure agreement.	Page 150 of 251
---------------	--	-----------------

DRAFT



One Socket Protocol ICD

This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

SIRF_VERSION_ID

SiRF Software Version ID

This field shall be set to the SiRF Software version ID. The ASCII representation of the character string, with the null terminator at the end, will be used. The number of characters (including the null terminator) should equal that set by "LENGTH_SIRF_VERSION_ID". For instance, the software version ID string denoted by A would be represented as "0100 0001 0000 0000" (including the null terminator).

LENGTH_SIRF_VERSION_ID

Number of characters in SiRF Version ID

This field shall be set to the length equal to the number of characters in the SIRF_VERSION_ID (including the null terminator). The range shall be from 0 to 80. Any other value has no meaning. For instance, if the SIRF_VERSION_ID is the character string A, then including the null terminator this is 2 bytes long, and hence this field would be represented by "0000 0010" in binary.

LENGTH_CUSTOMER_VERSION_ID

Number of characters in Customer Version ID

This field shall be set to the length equal to the number of characters in the CUSTOMER_VERSION_ID (including the null terminator). The range shall be from 0 to 80. Any other value has no meaning. For instance, if the CUSTOMER_VERSION_ID is the character string A, then including the null terminator this is 2 bytes long, and hence this field would be represented by "0000 0010" in binary.

SIRF_VERSION_ID

SiRF Software Version ID

This field shall be set to the SiRF Software version ID. The ASCII representation of the character string, with the null terminator at the end, will be used. The number of characters (including the null terminator) should equal that set by "LENGTH_SIRF_VERSION_ID". For instance, the software version ID string denoted by A would be represented as "0100 0001 0000 0000" (including the null terminator).

CUSTOMER_VERSION_ID

Customer Software Version ID

This field shall be set to the Customer Software version ID. The ASCII representation of the character string, with the null terminator at the end, will be used. The number of characters (including the null terminator) should equal that set by "LENGTH_CUSTOMER_VERSION_ID". For instance, the software version ID string denoted by A would be represented as "0100 0001 0000 0000" (including the null terminator).

DRAFT



This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

6.19 Serial Port Settings Response

Table 160: Serial Port Settings Response

MID (Hex)	0x46
MID (Dec)	70
Message Name in Code	MID_STATUS_RESP
SID (Hex)	0x08
SID (Dec)	8
SID Name in Code	SERIAL_SETTINGS_RESP

The “Serial Port Settings Response” message is output in response to “Serial Port Settings Request” message. Each time a “Serial Port Settings Request” message is received, a “Serial Port Settings Response” message or a “Reject” message should be sent.

Table 161: Serial Port Settings Response message

Field	Bytes	Scale	Unit
Message ID	1		
Message Sub ID	1		
PORT	1		
BAUD_RATE	4		
ACK_NUMBER	1		

PORT Serial Port A or B

This field shall be set to the port number that has been configured. “0” represents the port A and “1” represents the port B. Any other value has no meaning.


BAUD_RATE Baud Rate

This field shall be set to the desired baud rate. The current baud rates that are supported are 4800, 9600, 19200, 38400, 57600, and 115200. Any other value is illegal and is not supported. The Baud rate shall be coded as its equivalent binary value.

Example 1: “4800 bps” shall be coded as “000012C0” in hexadecimal equivalent.

Example 2: “115200bps” shall be coded “0001C200” in hexadecimal equivalent.

Warning note for 4e: Operation at speeds below 38400 carries risk of dropped messages when using SGEE

 <p>SiRF A CSR plc Company</p>	<h2>One Socket Protocol ICD</h2> <div style="border: 2px solid red; padding: 5px; display: inline-block; margin: 10px 0;"> <p style="color: red; font-size: small;">This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control.</p> </div> <p>Revision 5.5 11/16/2009</p>
--	--

ACK_NUMBER Acknowledge Number
 This field can take 2 values only, "1" and "2". In the serial port settings protocol, two acknowledgements shall be sent, one at the old baud rate ("1"), and the second one at the new baud rate ("2"). This field allows to distinguish between both acknowledges.

6.20 Channel Load Response

Table 162: Channel Load Response

MID (Hex)	0x46
MID (Dec)	70
Message Name in Code	MID_STATUS_RESP
SID (Hex)	0x05
SID (Dec)	5
SID Name in Code	CH_LOAD_RESP

The "Channel Load Response" message is output in response to "Channel Load Request" message. Each time a "Channel Load Request" message is received, a "Channel Load Response" message, multiple "Channel Load Response" messages, a "Reject" message, or no message should be sent. The "Channel Load Response" messages will be reported at a rate depending on the value of the "MODE" field in the "Channel Load Request" message. The reported values shall be calculated as the average during one entire second preceding the message transmission. They will represent a percentage of the total theoretical limit of the port at the current baud rate.

Table 163: Channel Load Response message


Field	Bytes	Scale	Unit
Message ID	1		
Message Sub ID	1		
PORT	1		
TOTAL_LOAD	1		
NUMBER_OF_CHANNELS	1		
The following two fields should be repeated for "NUMBER_OF_CHANNELS" times			
CHANNEL_LOAD	1		

PORT Serial Port A or B
 This field shall be set to the port number for which the load information has been requested. "0" represents the SiRF port A and "1" represents SiRF port B. Any other value has no meaning.

TOTAL_LOAD Total Load of the Port
 This field shall be set to the percentage of the total port bandwidth of the currently opened channels. The value will range from 0 to 100.

NUMBER_OF_CHANNELS The number of channels with data in message
 This field shall be set to the number of logical channels that have load data in the response message. All currently opened channels shall be reported.

CHANNEL_LOAD Total Load of the logical channel
 This field shall be set to the load that the logical channel is using. The value will range from 0 to 100.

 SiRF <small>A CSR plc Company</small>	One Socket Protocol ICD
<div style="border: 2px solid red; padding: 5px; color: red; font-weight: bold;"> This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control. </div>	Revision 5.5 11/16/2009

6.21 Tx Blanking Response

Table 164: Tx Blanking Response Message Definition

MID (Hex)	0x46
MID (Dec)	70
Message Name in Code	MID_STATUS_RESP
SID (Hex)	0x09
SID (Dec)	9
SID Name in Code	TX_BLANKING_RESP

The "Tx Blanking Response" message is output in response to "Tx Blanking Request" message. Each time a "Tx Blanking Request" message is received, a "Tx Blanking Response" message should be sent.

Table 165: Tx Blanking Response message

Field	Bytes	Scale	Unit
Message ID	1		
Message Sub ID	1		
ACK_NACK	1		
Reserved	1		

ACK_NACK Acknowledge or Non-Acknowledge

The value "0" represents ACK, and the value "1" represents NACK. NACK shall be sent if the requested Tx Blanking mode is not supported.

6.22 Test Mode Configuration Response

This message already exists from SSB and is being kept as is. Since it is a previously existing message and is untouched by the conversion of SSB->OSP, it is not documented in this manual. Details of MID and SID are mentioned here for reference.

Table 166: Existing Test Mode Config Response MID and SID

MID (hex)	MID (dec)	MID Name	SID (hex)	SID (dec)	SID Name
0x38	56	SSB_EE	0xFF	255	SSB_EE_ACK

Message details can be found in this document:

http://sirfcentral/sites/devops/SiRFLocServerAndLocationServicesPlatformDevelopment/Project%20SysEng/EASGEE_CLM_GPS_TOO_draft.doc



This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

6.23 OSP Revision Response

Table 167: OSP Revision Response Message Definition

MID (Hex)	0x46
MID (Dec)	70
Message Name in Code	MID_STATUS_RESP
SID (Hex)	0x07
SID (Dec)	7
SID Name in Code	OSP_REV_RESP

Table 168: OSP Revision Response message

Field	Bytes	Scale Factor	Unit
Message ID	1		
Message Sub ID	1		
OSP Revision	1	* 10	unitless

The OSP Revision field has a valid range of 1.0 – 25.5. Since there is one byte allotted, the value in this field should be divided by 10 to get the revision number (ex. A value of 10 in this field translates to OSP rev 1.0).

6.24 Nav Bit Aiding (NBA) Request Message

Table 169: Nav Bit Aiding (NBA) Request Message Definition

MID (Hex)	0x49
MID (Dec)	73
Message Name in Code	MID_AIDING_REQ
SID (Hex)	0x04
SID (Dec)	4
SID Name in Code	NBA_REQ

This message is requesting the Nav Bit Aiding Response Messages (215 (MID_AIDING_RESP), 4 (SET_NBA_SF1_2_3)) and/or (215, (MID_AIDING_RESP), 5, (SET_NBA_SF4_5)), depending on the value of the NAVBIT_REQ_FLAG bit settings in the parameter block below. The message contains a SECTION_VALIDITY_FLAG field followed by request sections. Each request section has a "SECTION_SIZE" as the first byte to indicate the number of bytes in the associated section. The existence of "SECTION_SIZE", and proper handling of this field by SLC and CP supports forward compatibility.



This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

Table 170: Nav Bit Aiding Request Fields

Field		Length (bits)	Description
SECTION_VALIDITY_FLAG		16	Bit0 <ul style="list-style-type: none"> 0 = NAVBIT section is NOT valid 1 = NAVBIT section is valid
NAVBIT SECTION	SECTION_SIZE	8	The size of this section in bytes, including "SECTION_SIZE" field. For this release, SECTION_SIZE should be set to 6.
	SAT_MASK_NAVBIT	32	This is a bitmap representing the satellites for which subframe 1, 2, and 3 NavBit aiding is requested. If SLC requests such NAV bit aiding for the satellite represented by a bit of this field, SLC shall set that bit to '1'. The LSB (Bit 0) of this field represents satellite PRN number 1. The MSB (Bit 31) of this field represents satellite PRN 32.
	NAVBIT_REQ_FLAG	8	Bit 0: <ul style="list-style-type: none"> 0 => Subframe 1, 2, and 3 are NOT requested 1 => Subframe 1, 2, and 3 are requested Bit 1: <ul style="list-style-type: none"> 0 => Subframe 4 and 5 are NOT requested 1 => Subframe 4 and 5 are requested Bit 2 – 7: Reserved

6.25 Hardware Control Output

This message ID is reserved for future hardware control features, including VCTCXO and on/off signal configuration. Although two SIDs are specified in the master MID list, they are only placeholders to show which features would use this MID and there can be additions/subtractions to the

Table 171: Hardware Control Output Message Definition


MID (Hex)	0x5B
MID (Dec)	91
Message Name in Code	MID_HW_CTRL_OUT
SID (Hex)	TBD
SID (Dec)	TBD
SID Name in Code	TBD

Table 172: Hardware Control Output message

Field	Bytes	Scale	Unit
Message ID	1		
Message Sub ID	1		
Message details TBD			

6.26 DOP Values Output

This message provides all DOP information: GDOP, PDOP, HDOP, VDOP, and TDOP. This message is sent at 1 Hz rate. The DOP values validity is determined by the "DOP limit Exceeded" flag in the

	One Socket Protocol ICD	
	<div style="border: 2px solid red; padding: 5px;"> This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control. </div>	Revision 5.5 11/16/2009

SSB_GEODETTIC_NAVIGATION message. A value of 50 is used for any DOP of value 50 or more, and for invalid values.

Table 173: DOP Value Output Message Definition

MID (Hex)	0x42
MID (Dec)	66
Message Name in Code	SSB_DOP_VALUES

Table 174: DOP Value Output Fields

Field	Bytes	Scale	Unit	Data range (after de-scaling)	Description
Message ID	1				
gps_tow	4	0.001	sec	0 to 604799.999	GPS time of the week
gdop	2	0.1		0 to 50	Geometric DOP
pdop	2	0.1		0 to 50	Position DOP
hdop	2	0.1		0 to 50	Horizontal DOP
vdop	2	0.1		0 to 50	Vertical DOP
tdop	2	0.1		0 to 50	Time DOP

6.27 CW Controller Output

6.27.1 CW Interference Report

CW Interference message reports the presence of at most 8 interferences detected as a result of the most recent CW scan or monitor.

Table 175: CW Interference Report Message Definition

MID (Hex)	0x5C
MID (Dec)	92
Message Name in Code	MID_CW_OUTPUT
SID (Hex)	0x01
SID (Dec)	1
SID Name in Code	CW_DATA

Table 176: CW Interference Report Field Definitions

Field	Bytes	Unit	Scale	Description
Message ID	U1			Message ID (0x5C)
Sub ID	U1			Sub ID (0x01)
Frequency 0	U4	Hz		Frequency of peak 0
...				Repeat for each peak
Frequency 7	U4	Hz		Frequency of peak 7
C/No 0	U2	dB-Hz	0.01	Signal to Noise of peak 0
...				Repeat for each peak
C/No 7	U2	dB-Hz	0.01	Signal to Noise of peak 7

6.27.2 CW Mitigation Report

CW Mitigation message reports filtering employed to mitigate the effects of the interference.

CS-129291-DC2	© SiRF Technology, Inc., a member of the CSR plc group of companies 2009 This material is subject to SiRF's non-disclosure agreement.	Page 157 of 251
---------------	--	-----------------

DRAFT


 <p>SiRF A CSR plc Company</p>	<h2>One Socket Protocol ICD</h2> <div style="border: 2px solid red; padding: 5px; display: inline-block; margin: 10px 0;"> <p style="color: red; font-size: small;">This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control.</p> </div> <p>Revision 5.5 11/16/2009</p>
--	--


Table 177: CW Mitigation Report Message Definition

MID (Hex)	0x5C
MID (Dec)	92
Message Name in Code	MID_CW_OUTPUT
SID (Hex)	0x02
SID (Dec)	2
SID Name in Code	CW_FILTER

Table 178: CW Mitigation Report Field Definitions

Field	Bytes	Unit	Description
Message ID	U1		Message ID (0x5C)
Sub ID	U1		Sub ID (0x02)
Sampling Mode	U1		Enumeration of sampling modes: 0: Use complex $8f_0$, no filter 1: Use complex $2f_0$, no filter 2: Use 2MHz filter 3: Use OFFT filter
A/D Mode	U1		Enumeration of A/D modes: 0: Use 2-bit A/D 1: Use 4-bit A/D
Center freq bin of freq 0	S1		Center frequency bin of the frequency 0. Range: -128 to 127 When the number of bins field (below) is 0, this field will be 0.
Number of bins for freq 0	U1		Number of bins excised on one side of the center frequency bin. Total number of bins excised = $2 \times$ this number + 1. 0: no bin excised
...			Repeat these two fields above for each frequency.
Center freq bin of freq 7	S1		Center frequency bin of the frequency 7. Range: -128 to 127 When the number of bins field (below) is 0, this field will be 0.
Number of bins for freq 7	U1		Number of bins excised on one side of the center frequency bin. Total number of bins excised = $2 \times$ this number + 1. 0: no bin excised

DRAFT

 <p>SiRF A CSR plc Company</p>	<h2>One Socket Protocol ICD</h2> <div style="border: 2px solid red; padding: 5px; display: inline-block; margin: 10px 0;"> This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control. </div> <p>Revision 5.5 11/16/2009</p>
--	---

6.28 Power Mode Response

This message is output in response to the MID_PWR_MODE_REQ message. This response echoes back the low power mode which was set and it acknowledges either the completion of the transition to the requested power mode or the failure of the transition by remaining in the original power mode from where the MID_PWR_MODE_REQ request was issued.

Table 179: Power Mode Response Message Definition

MID (Hex)	0x5A
MID (Dec)	90
Message Name in Code	MID_PWR_MODE_RESP
SID (Hex)	Listed below
SID (Dec)	Listed below
SID Name in Code	Listed below

Table 180: SIDs for Power Mode Response message

0x00	0	FP_MODE_RESP
0x01	1	APM_RESP
0x02	2	MPM_RESP
0x03	3	ATP_RESP
0x04	4	PTF_RESP

The SID value is equal to the SID value in the requesting MID_PWR_MODE_REQ message in this response, whether the transition to this requested new mode was successful or not.

Table 181 Power Mode Response Message Fields

Field	Bytes	Scale	Unit
Message ID	1		
Message Sub ID	1		
ERROR_CODE	1		

Table 182 Power Mode Response Error Code Values

Value	Condition
0x00	No error, requested transition performed successfully
0x01	Specified mode is same as current, no transition occurred
0x02	Specified power mode is not supported in current product
0x03	Unmet preconditions when transitioning to requested mode
0xXY	Invalid ATP_REQ, resulting TBF is too low, not supported
0xXZ	Transition to ATP suspended sequence of POS_RESP messages with conflicting QoP
0xXW	Transition to PTF suspended sequence of POS_RESP messages with conflicting QoP
0xXN	Transition to APM overriding a conflicting QoP specified in a POS_REQ being served
0x04-0xFF	Reserved



This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

6.29 Query Response

This message is in response to the QUERY REQUEST message.

Table 183: Query Response Message Definition

MID (Hex) 0x51
MID (Dec) 81
Message Name in Code MID_QUERY_RESP

Field	Bytes	Scale	Unit
Message ID	1		
QUERY_MID	1		
QUERY_SID	1		
ECHO_LENGTH	1		
MSG_ECHO	Variable		

QUERY_MID Message ID for query
Specifies which mode/setting is being queried. If the MID/SID combination sent

QUERY_SID Sub ID for query
If a particular query requires that a SID be specified, it is in this field. Not all queries require a SID to be specified and therefore if a MID is sent where the SID does not matter, this field is ignored.

ECHO_LENGTH Number of bytes in the QUERY_ECHO field.

QUERY_ECHO Echo of the MID and SID specified for the query.
Sends back the current settings as known by the client in the message format specified by the MID/SID.

Query support is available only for the following MID/SIDs:

Table 184: Query Response Supported Messages

QUERY_MID	QUERY_SID	Description
218	Ignored	Determine if we are in a low power mode or full power.

NOTE! For the response to be sent to the receiver, it must be awake. Any QUERY_REPSONSE messages sent while the receiver is in standby or hibernate will not be responded to. In this way, receiving a QUERY RESPONSE message indicates here that the receiver is not in a standby or hibernate low power mode.

 <p>SiRF A CSR plc Company</p>	<p>One Socket Protocol ICD</p> <div style="border: 2px solid red; padding: 5px; display: inline-block;"> <p>This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control.</p> </div> <p>Revision 5.5 11/16/2009</p>
--	---

6.30 Low Power Mode Output

This message currently only has one SID defined, though the intent is to have more output messages while in low power (LP) modes put under this MID in the future.

Micro Power Mode Error

This message is only output if there is a problem with going into or maintaining Micro Power Mode (MPM).

Table 185: Low Power Mode Output Message Definition

MID (Hex)	0x4D
MID (Dec)	77
Message Name in Code	MID_LP_OUTPUT
SID (Hex)	0x01
SID (Dec)	1
SID Name in Code	MPM_ERR

Table 186: MPM Power Mode Error Message

Field	Bytes	Scale	Unit
Message ID	1		
Message Sub ID	1		
ERR_REASON	1		
Reserved	4		

ERR_REASON


Reason for exiting MPM mode

The exact details are TBD for this message but this byte will be a bit field which points to the reason MPM did not operate as anticipated. More input is needed from Kevin Powell, but these error conditions will include the following:

- 1) Error exceeds preset threshold values
- 2) No navigation

Reserved

Reserved for future use/definition

 <p>SiRF A CSR plc Company</p>	<p>One Socket Protocol ICD</p> <div style="border: 2px solid red; padding: 5px; display: inline-block; margin-bottom: 10px;"> <p style="color: red; font-size: small;">This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control.</p> </div> <p>Revision 5.5 11/16/2009</p>
--	--

6.31 Clock Modeling Output

6.31.1 TCXO Learning Output Request

Table 187: TCXO Learning Output

Message Name	TCXO_LEARNING
Input or Output	Output
MID (Hex)	5D
MID (Dec)	93
Message Name in Code	MID_TCXO_LEARNING_OUT
SID (Hex)	See below
SID (Dec)	See below
SID Name in Code	See below

Table 188: TCXO Learning Output SID Descriptions

Bit Field	Description	Inclusion
0x00	Not Used	
0x01	Clock model data base output	In all builds
0x02	Temperature table output	In all builds
0x03	Not Used	
0x04	Temp Recorder output	In Xo Test Builds Only
0x05	EARC output	In Xo Test Builds Only
0x06	RTC alarm output	In Xo Test Builds Only
0x07	RTC calibration output	In Xo Test Builds Only
0x08	Not Used	
0x09	MPM searches output	In Xo Test Builds Only
0x0A	MPM prepos output	In Xo Test Builds Only
0x0B	Micro Nav measurements output	In Xo Test Builds Only
0x0C	TCXO Uncertainty output	In Xo Test Builds Only
0x0D	System time stamps output	In Xo Test Builds Only

Messages marked as “Xo Test Builds Only” in the above table are missing in standard builds for products to be shipped to customers. These messages are present in special test builds only made for the purpose of testing the TCXO features.

DRAFT

 <p>SiRF A CSR plc Company</p>	<h2>One Socket Protocol ICD</h2> <div style="border: 2px solid red; padding: 5px; display: inline-block; margin: 10px 0;"> <p style="color: red; font-size: small;">This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control.</p> </div> <p>Revision 5.5 11/16/2009</p>
--	--

6.31.2 TCXO Learning Clock Model Data Base


Table 189: Clock Model Data Base Message Definition

Message Name	TCXO_LEARNING
Input or Output	Output
MID (Hex)	5D
MID (Dec)	93
Message Name in Code	MID_TCXO_LEARNING_OUT
SID (Hex)	0x01
SID (Dec)	1
SID Name in Code	CLOCK_MODEL_DATA_BASE_OUT

Table 190: Clock Model Data Base Message Field Definitions

Name	Bytes	Binary (Hex)		Unit	ASCII (Dec)		Description
		Scale	Example		Scale	Example	
Message ID	U1					93	TCXO Learning Output
Sub ID	U1					1	Clock model data base output
Source	U1						Bit mask indicating source of the clock model. 0x0 = NOT_SET 0x1 = ROM 0x2 = DEFAULTS 0x4 = MFG 0x8 = TEST_MODE 0x10 = FIRST_NAV
Aging Rate Uncertainty	U1			Ppm /year	0.1	10	Aging rate of uncertainty
Initial offset Uncertainty	U1			ppm	0.1	10	Initial Frequency offset of the TCXO
spare	U1						
Clock Drift	S4			ppb	1	60105	Clock drift
Temp Uncertainty	U2			ppm	0.01	50	Temperature uncertainty
Manufacturing Week number	U2			GPS Week #	1	1465	TCXO Manufacturing week number in full GPS weeks
Spare	U4						

DRAFT

 <p>SiRF A CSR plc Company</p>	<h2>One Socket Protocol ICD</h2> <div style="border: 2px solid red; padding: 5px; display: inline-block; margin: 10px 0;"> <p style="color: red; font-size: small;">This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control.</p> </div> <p>Revision 5.5 11/16/2009</p>
---	--

6.31.3 TCXO Learning Temperature Table


Table 191: Temperature Table Message Definition

Message Name	TCXO_LEARNING
Input or Output	Output
MID (Hex)	5D
MID (Dec)	93
Message Name in Code	MID_TCXO_LEARNING_OUT
SID (Hex)	0x02
SID (Dec)	2
SID Name in Code	TEMPERATURE_TABLE

Table 192: Temperature Table Message Field Definitions

Name	Bytes	Binary (Hex)		Unit	ASCII (Dec)		Description
		Scale	Example		Scale	Example	
Message ID	1					93	TCXO Learning Output
Sub ID	1					2	Temperature table output
Spare1	U4						
Offset	S2			ppb	1	-331	Frequency offset bias of the table from the CD default
Global Min	S2			ppb	1	-205	Minimum XO error observed
Global Max	S2			ppb	1	442	Maximum XO error observed
First Week	U2			GPS Week #	1	1480	Full GPS week of the first table update
Last Week	U2			GPS Week #	1	1506	Full GPS week of the last table update
LSB	U2			Ppb	1	4	Array LSB Scaling of Min[] and Max[]
Aging Bin	U1				1	37	Bin of last update
Aging Up Count	S1				1	4	Aging up / down count accumulator
Bin Count	U1						Count of bins filled
Spare2	U1						
Min []	1 * 64			Ppb * LSB			Min XO error at each temp scaled by LSB
Max []	1 * 64			Ppb * LSB			Max XO error at each temp scaled by LSB

DRAFT

 <p>SiRF A CSR plc Company</p>	<h2>One Socket Protocol ICD</h2> <div style="border: 2px solid red; padding: 5px; display: inline-block; margin: 10px 0;"> This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control. </div> <p>Revision 5.5 11/16/2009</p>
--	---

6.31.4 TCXO Learning Temperature Recorder

This message is missing in standard builds for products to be shipped to customers, and present in special test builds only made for the purpose of testing the TCXO features.

Table 193: Temperature Recorder Message Definition


Message Name	TCXO_LEARNING
Input or Output	Output
MID (Hex)	5D
MID (Dec)	93
Message Name in Code	MID_TCXO_LEARNING_OUT
SID (Hex)	0x04
SID (Dec)	4
SID Name in Code	TEMP_RECORDER_MESSAGE

Table 194: Temperature Recorder Message Field Definitions

Name	Bytes	Binary (Hex)		Unit	ASCII (Dec)		Description
		Scale	Example		Scale	Example	
Message ID	U1					93	TCXO Learning Output
Sub ID	U1					4	Temp Recorder output
Current Time Count	U4			ms			Time since power on
RTC 1 sec time tag	U2			sec			RTC One Second Time of the TR value
TR value	U1			C	140/ 256 - 40C		Temperature Recorder value
N Count	U1						TR Queue rec count
Total Count	U1						TR Queue total count
Status	U1						Bit 1: 0 = New TRec readings will update Temperature Table 1 = Ignore updates to the Temperature Table
Seq number	U2						Sequence number counter. Set to 0 at startup, incremented for each output and rollover on overflow

DRAFT

DRAFT

 SiRF A CSR plc Company	One Socket Protocol ICD <div style="border: 2px solid red; padding: 5px; display: inline-block; color: red; font-weight: bold;">This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control.</div> Revision 5.5 11/16/2009
--	---

6.31.5 TCXO Learning EARC

This message is missing in standard builds for products to be shipped to customers, and present in special test builds only made for the purpose of testing the TCXO features.

Table 195: EARC Message Definition


Message Name	TCXO_LEARNING
Input or Output	Output
MID (Hex)	5D
MID (Dec)	93
Message Name in Code	MID_TCXO_LEARNING_OUT
SID (Hex)	0x05
SID (Dec)	5
SID Name in Code	EARC

Table 196: EARC Message Field Definitions

Name	Bytes	Binary (Hex)		Unit	ASCII (Dec)		Description
		Scale	Example		Scale	Example	
Message ID	U1				93	TCXO Learning Output	
Sub ID	U1				5	EARC output	
Current Time Count	U4			ms		Time since power on	
Acqclk lsw	U4					EARC latched time	
RTC Wclk Secs	U4					EARC latched RTC Wclk Secs	
RTC Wclk Counter	U2			ms		EARC latched RTC Wclk Counter	
EARC r0	U2					EARC r0	
EARC r1	U2					EARC r1	
spare	U2						

DRAFT

DRAFT

 SiRF A CSR plc Company	One Socket Protocol ICD <div style="border: 2px solid red; padding: 5px; display: inline-block; margin: 10px 0;">This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control.</div> Revision 5.5 11/16/2009
--	--

6.31.6 TCXO Learning RTC Alarm

This message is missing in standard builds for products to be shipped to customers, and present in special test builds only made for the purpose of testing the TCXO features.

Table 197: RTC Alarm Message Definition

Message Name	TCXO_LEARNING
Input or Output	Output
MID (Hex)	5D
MID (Dec)	93
Message Name in Code	MID_TCXO_LEARNING_OUT
SID (Hex)	0x06
SID (Dec)	6
SID Name in Code	RTC_ALARM

Table 198: RTC Alarm Message Field Definitions

Name	Bytes	Binary (Hex)		Unit	ASCII (Dec)		Description
		Scale	Example		Scale	Example	
Message ID	U1					93	TCXO Learning Output
Sub ID	U1					6	RTC alarm output
Current Time Count	U4			ms			Time since power on
Acq Clock LSW	U4						Latched Acq clock least significant word
RTC Welk Secs	U4						Latched RTC Welk Secs
RTC Welk Counter	U2						Latched RTC Welk counter
spare	U2						

DRAFT

DRAFT

 <p>SiRF A CSR plc Company</p>	<h2>One Socket Protocol ICD</h2> <div style="border: 2px solid red; padding: 5px; display: inline-block; margin: 10px 0;"> <p style="color: red; font-size: small;">This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control.</p> </div> <p>Revision 5.5 11/16/2009</p>
--	--

6.31.7 TCXO Learning RTC Cal

This message is missing in standard builds for products to be shipped to customers, and present in special test builds only made for the purpose of testing the TCXO features.

Table 199: RTC Cal Message Definition

Message Name	TCXO_LEARNING
Input or Output	Output
MID (Hex)	5D
MID (Dec)	93
Message Name in Code	MID_TCXO_LEARNING_OUT
SID (Hex)	0x07
SID (Dec)	7
SID Name in Code	RTC_CAL

Table 200: RTC Cal Message Field Definitions

Name	Bytes	Binary (Hex)		Unit	ASCII (Dec)		Description
		Scale	Example		Scale	Example	
Message ID	U1					93	TCXO Learning Output
Sub ID	U1					7	RTC calibration output
Current Time Count	U4			ms			Time since power on
ACQ Clock LSW	U4			ns		60.99 ns	ACQ Clock LSW in 60.99 ns resolution
GPS Time Int	U4						Integer part of GPS Time
GPS Time Frac	U4			ns			Fractional part of GPS Time
RTC WClk Sec	U4			sec			RTC WClk Seconds
RTC WClk Ctr	U2			sec		1/32768	Rtc Wclk counter
RTC Freq Unc	U2			ppb		1e-3	RTC Freq Unc
RTC / Acq Drift Int	U4						Integer part of RTC Drift
RTC Drift Frac	U4						Fractional part of RTC Drift
RTC Time Unc	U4			sec		1e-6	RTC Time Unc
RTC / GPS Drift	I4			Hz		1/L1	RTC / GPS Drift
Xo Freq Offset	U4			Hz		1/L1	XO Frequency offset
GPS Week	U2						GPS Week
Spare	U2						

DRAFT

DRAFT



One Socket Protocol ICD

This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

6.31.8 TCXO Learning TBD (Not Used)

Table 201: Not Used

Message Name	TCXO_LEARNING
Input or Output	Output
MID (Hex)	5D
MID (Dec)	93
Message Name in Code	MID_TCXO_LEARNING_OUT
SID (Hex)	0x08
SID (Dec)	8
SID Name in Code	Not Used

6.31.9 TCXO Learning MPM Searches

This message is missing in standard builds for products to be shipped to customers, and present in special test builds only made for the purpose of testing the TCXO features.

Table 202: MPM Searches Message Definition


Message Name	TCXO_LEARNING
Input or Output	Output
MID (Hex)	5D
MID (Dec)	93
Message Name in Code	MID_TCXO_LEARNING_OUT
SID (Hex)	0x09
SID (Dec)	9
SID Name in Code	MPM_SEARCHES

Table 203: MPM Searches Message Field Definitions

Name	Bytes	Binary (Hex)		Unit	ASCII (Dec)		Description
		Scale	Example		Scale	Example	
Message ID	U1					93	TCXO Learning Output
Sub ID	U1					9	MPM searches output
Number of records	U1						Number of records
Spare1	U1						
Spare2	U2						
Current Time Count	U4			ms			Time since power on
Acqclk lsw	U4						
							following fields are based on number of records
Code Phase record [num]	U4						Code phase
Doppler [num]	I4						Frequency
Code Offset	U4						
Peak Mag	U4			dB-Hz			Peak Magnitude
Status[num]	U2						

DRAFT

DRAFT

	One Socket Protocol ICD			
	This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control .			Revision 5.5 11/16/2009

		Binary (Hex)		ASCII (Dec)		
SVID [num]	U1					SVID searched
Spare [num]	U1					

6.31.10 TCXO Learning MPM Pre-Positioning

This message is missing in standard builds for products to be shipped to customers, and present in special test builds only made for the purpose of testing the TCXO features.


Table 204: MPM Pre-positioning Message Definition

Message Name	TCXO_LEARNING
Input or Output	Output
MID (Hex)	5D
MID (Dec)	93
Message Name in Code	MID_TCXO_LEARNING_OUT
SID (Hex)	0x0A
SID (Dec)	10
SID Name in Code	MPM_PREPOS

Table 205: MPM Pre-positioning Message Field Definitions

Name	Bytes	Binary (Hex)		Unit	ASCII (Dec)		Description
		Scale	Example		Scale	Example	
Message ID	U1					93	TCXO Learning Output
Sub ID	U1					10	MPM prepos output
Number of records	U1						Number of records
Spare1	U1						
Spare2	U2						
Current Time Count	U4			ms			Time since power on
Acqclk lsw	U4						acqclk, lsw
							following fields are based on number of records
Pseudo Range [num]	U4			m			Pseudo Range of the SVID
Pseudo Range Rate [num]	U2			m/s			Pseudo Range Rate of the SVID
SVID [num]	U1						SVIDs searched in MPM search list
Spare [num]	U1						

DRAFT

 SiRF <small>A CSR plc Company</small>	<h2 style="margin: 0;">One Socket Protocol ICD</h2> <div style="border: 2px solid red; padding: 5px; margin: 5px 0;"> <p style="font-size: small; color: red; margin: 0;">This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control.</p> </div> <div style="margin-top: 5px;"> <p style="font-size: small; margin: 0;">Revision 5.5 11/16/2009</p> </div>
--	---

6.31.11 TCXO Learning Micro-Nav Measurement

This message is missing in standard builds for products to be shipped to customers, and present in special test builds only made for the purpose of testing the TCXO features.

Table 206: Micro-Nav Measurement Message Definition

Message Name	TCXO_LEARNING
Input or Output	Output
MID (Hex)	5D
MID (Dec)	93
Message Name in Code	MID_TCXO_LEARNING_OUT
SID (Hex)	0x0B
SID (Dec)	11
SID Name in Code	MICRO_NAV_MEASUREMENT

Table 207: Micro-Nav Measurement Field Definitions

Name	Bytes	Binary (Hex)		Unit	ASCII (Dec)		Description
		Scale	Example		Scale	Example	
Message ID	U1					93	TCXO Learning Output
Sub ID	U1					11	Micro Nav measurements output
Number of measurements	U1						Number of measurements in the message
Mode	U1						Operational mode
Spare	U2						
Current Time Count	U4			ms			Time since power on
Acqclk lsw	U4						acqclk, lsw
Time Corr	S4			ms	1e6		Time Correction
Time Corr Unc	U4			ms	1e6		Time Correction Uncertainty
Freq Corr	S2				1575.42 MHz		TCXO Oscillator Frequency Correction; Scale by L1
Freq Corr Unc	U2				1575.42 MHz		TCXO Oscillator Frequency Correction Uncertainty; Scale by L1
							following fields are based on number of measurements
Pseudo Range[num]	U4			m	10		PR
Pseudo Range Rate [num]	S2			m/s			PRR
C/No [num]	U2				10		C/No
SVID [num]	U1						SVID
Spare1[num]	U1						
Spare	U1						

 SiRF <small>A CSR plc Company</small>	<h2 style="margin: 0;">One Socket Protocol ICD</h2>
<div style="border: 2px solid red; padding: 5px; color: red; font-weight: bold; font-size: small;"> This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control. </div>	Revision 5.5 11/16/2009

6.31.12 TCXO Learning TCXO Uncertainty

This message is missing in standard builds for products to be shipped to customers, and present in special test builds only made for the purpose of testing the TCXO features.


Table 208: TCXO Uncertainty Message Definition

Message Name	TCXO_LEARNING
Input or Output	Output
MID (Hex)	5D
MID (Dec)	93
Message Name in Code	MID_TCXO_LEARNING_OUT
SID (Hex)	0x0C
SID (Dec)	12
SID Name in Code	TCXO_UNCERTAINTY

Table 209: TCXO Uncertainty Message Field Definitions

Name	Bytes	Binary (Hex)		Unit	ASCII (Dec)		Description
		Scale	Example		Scale	Example	
Message ID	U1					93	TCXO Learning Output
Sub ID	U1					12	TCXO Uncertainty
Current Time Count	U4			Ms			Time since power on
Acqclk.lsw	U4						Acqclk.lsw
Frequency	U4			Hz			Clock Drift Frequency
Frequency Uncertainty Nominal	U2			ppb			Nominal Frequency uncertainty = A + T + M
Frequency Uncertainty Full	U2			Ppb			Full Frequency Uncertainty = A + T + M
Temperature Uncertainty Nominal	U2			Ppb			Temperature (T) uncertainty component, nominal
Temperature Uncertainty Full	U2			Ppb			Temperature (T) uncertainty component, full
Aging Uncertainty Nominal	U2			Ppb			Aging (A) uncertainty component, nominal
Measurement Uncertainty Nominal	U2			ppb			Measurement (M) uncertainty component, nominal
Measurement Uncertainty Full	U2			ppb			Measurement (M) uncertainty component, full
GPS Week #	U2			GPS Week #			Current GPS Week number of the uncertainty data
Temperature	U1			Deg C	140/ 256		Raw temperature in 0.549 degrees resolution

DRAFT

	One Socket Protocol ICD	
	This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control .	Revision 5.5 11/16/2009

					- 40		
Spare	U1						
Spare	U4						

6.31.13 TCXO Learning System Time Stamp

This message is missing in standard builds for products to be shipped to customers, and present in special test builds only made for the purpose of testing the TCXO features.

Table 210: System Time Stamp Message Definition

Message Name	TCXO_LEARNING
Input or Output	Output
MID (Hex)	5D
MID (Dec)	93
Message Name in Code	MID_TCXO_LEARNING_OUT
SID (Hex)	0x0D
SID (Dec)	13
SID Name in Code	SYSTEM_TIME_STAMP

Table 211: System Time Stamp Message Field Definitions

Name	Bytes	Binary (Hex)		Unit	ASCII (Dec)		Description
		Scale	Example		Scale	Example	
Message ID	U1					93	TCXO Learning Output
Sub ID	U1					13	System time stamps
Current Time Count	U4			Ms			Time since power on
ACQ Clk msw	U4			ns			Acq Clock Msw
ACQ Clk lsw	U4			ns			Acq Clock Lsw
TOW Int	U4			Sec			Integer part of TOW
TOW Frac Ns	U4			Nsec			Fractional part of TOW
RTC Seconds	U4			sec	1		RTC Seconds
RTC Counter	U2			us	1/ 32768		RTC Counter Value
Clock Bias	I4						Clock Bias, m
Clock Drift	I4						Clock Drift, m/s
Spare	U2						

DRAFT



This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

6.32 SGEE Download Output

These functions are needed to respond to messages requesting download the SGEE data into the SLC Flash and to get the SGEE and EE age from the SLC.

These SGEE file download input messages used message id 232 (MID_EE_INPUT) and the output responses here have message id 56 ((SSB_EE). Different sub- message ids are used to perform different actions.

The table below shows the message IDs assigned to the output messages.

Table 212: SGEE Download Output

MID (Hex)	0x38
MID (Dec)	56
Message Name in Code	SSB_EE
SID (Hex)	As below
SID (Dec)	As below
SID Name in Code	As below

Table 213 : Output Messages Sub- IDs.

SNo.	Sub-Message ID	Message Name
1.	0x20	ECLM Ack/Nack
2.	0x21	ECLM EE Age
3.	0x22	ECLM SGEE Age


SID 0x20 (32) ECLM Ack / Nack

This is the response message to the Input Message ID 232, SubMsgID's 22, 23, 24, 25 or 26.

Table 214: ECLM Start Download Ack/Nack Message Field Definition

Name	Bytes	Binary (Hex)		Unit	Description
		Scale	E.g.		
Message ID	1U		0x38		Decimal 56: SSB_EE
Sub Message ID	1U		0x20		ECLM Ack/Nack
Ack Msg Id	1U		0xE8		Ack Message Id 232
Ack Sub Id	1U		0x16		Ack Sub Id, ECLM Start Download 0x16
Ack/Nack	1U		00		0 = Ack
Ack Nack Reason	1U		00		ECLM_SUCCESS = 0, ECLM_SPACE_UNAVILABLE = 1 ECLM_PKT_LEN_INVALID = 2, ECLM_PKT_OUT_OF_SEQ = 3, ECLM_DOWNLOAD_SGEE_NONE WFILE = 4, ECLM_DOWNLOAD_CORRUPTFIL E_ERROR = 5, ECLM_DOWNLOAD_GENERIC FAI

DRAFT

 SiRF A CSR plc Company	One Socket Protocol ICD		
	This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control.		Revision 5.5 11/16/2009

					LURE = 6, ECLM_API_GENERIC_FAILURE = 7
--	--	--	--	--	--

Payload length: 6 bytes

SID 0x21 (33) ECLM EE Age

This is the response message to the Input Message "ECLM Get EE Age" with Message ID 56, SubMsgID 25.

Table 215: Output ECLM Get EE Age Message Field Definitions

Name	Bytes	Binary (Hex)		Unit	Description
		Scale	E.g.		
Message ID	1U		0x38		Decimal 56
Sub Message ID	1U		0x21		Response to ECLM Get EE Age
numSAT ID	U1		01		This field indicates the number of times following fields are present in the message
prnNum;	U1		02		PRN number of satellite for which age is indicated in other fields.
ephPosFlag	U1		02		Ephemeris flag to indicate the type of ephemeris available for the satellite:(Position Age) 0: Invalid ephemeris, not available, 1: BE, 2: SGEE, 3: CGEE
eePosAge	U2		00 00		Age of EE in 0.01 days (Position Age)
cgeePosGPS Week	U2		00 00		GPS week of BE used in the CGEE generation; 0 if ephPosFlag is not set to 3 or set to 0.(Position Age)
cgeePosTOE	U2		00 00		TOE of BE used in the CGEE generation; 0 if ephPosFlag is not set to 3.or set to 0 (Position Age)
ephClkFlag	U1		02		Ephemeris flag to indicate the type of ephemeris available for the satellite:(Clock Age)
eeClkAge	U2		00 00		Age of EE in 0.01 days(Clock Age)
cgeeClkGPS Week	U2		00 00		GPS week of BE used in the CGEE generation; 0 if ephClkFlag is not set to 3 or set to 0.(Clock Age)
cgeeClkTOE	U2		00 00		TOE of BE used in the CGEE generation; 0 if ephClkFlag is not set to 3.or set to 0(Clock Age)

DRAFT

 <p>SiRF A CSR plc Company</p>	<p>One Socket Protocol ICD</p> <div style="border: 2px solid red; padding: 5px; display: inline-block;"> <p>This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control.</p> </div> <p>Revision 5.5 11/16/2009</p>
--	---

Payload length: 19 bytes

SID 0x22 (34) ECLM SGEE Age

This is the response message to the Input Message "ECLM Get SGEE Age" with Message ID 232, SubMsgID 26

SGEE Age and Prediction Interval has 32 bit length.

Table 216: Output ECLM Get SGEE Age Message Field Definitions

Name	Bytes	Binary (Hex)		Unit	Description
		Scale	E.g.		
Message ID	1U		0x38		Decimal 56
Sub Message ID	1U		0x22		Response to ECLM Get SGEE Age
SGEE Age	4U		00 00 80 ea		Age of the Satellite
Prediction Interval	4U		00 01 51 80		Prediction Interval

Payload length: 10 bytes

6.33 SW Toolbox Output

(Remember, Output means Host to User System.) These messages allow the User System to access Tracker features via the Host. The Host will essentially map the MEI responses from the Tracker to SSB responses for the User System. The mapping is required since a direct pass-through is not always allowed. Some Tracker responses will require a corresponding change to the Host (for example, a change to the Tracker baud rate will necessitate a change at the Host or communication will be lost).

MID (Hex)	0xB2
MID (Dec)	178
Message Name in Code	MID_TrackerIC (see PROTOCOL.H)
SID (Hex)	As below
SID (Dec)	As below
SID Name in Code	As below

6.33.1 SID 0x04 (4) SID PeekPoke Response

Tracker Peek Response (four-byte peek) (unsolicited)

Upon reception of the MEI 0xA0 (Peek Response) from the Tracker, the Host will generate this response for the User System.

DRAFT


 SiRF A CSR plc Company	One Socket Protocol ICD
<div style="border: 2px solid red; padding: 5px; display: inline-block;">This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control.</div>	
Revision 5.5 11/16/2009	

Table 217: Tracker Peek Response (four-byte peek) (unsolicited)

Field	Length (bytes)	Description
MID	1	0xB2
SID	1	0x04
Type	1	enumeration 0 = Peek results 10 = eFUSE peek results (4e and beyond only)
Address	4	unsigned integer
Data	4	always four bytes

Tracker Poke Response (four-byte poke or n-byte poke) (unsolicited)

Upon reception of the MEI 0x81 (Acknowledge for poke) from the Tracker, the Host will generate this response for the User System.

Table 218: Tracker Poke Response (four-byte poke or n-byte poke) (unsolicited)

Field	Length (bytes)	Description
MID	1	0xB2
SID	1	0x04
Type	1	enumeration 1 = Poke command received

Tracker Peek Response (n-byte peek) (unsolicited)

Upon reception of the MEI 0xA0 (Peek Response) from the Tracker, the Host will generate this response for the user system.

Table 219: Tracker Peek Response (n-byte peek) (unsolicited)


Field	Length (bytes)	Description
MID	1	0xB2
SID	1	0x04
Type	1	enumeration 2 = Multi-peek response 12 = eFUSE multi-peek response (4e and beyond only)
Address	4	unsigned integer Beginning address
Number of Bytes	2	unsigned integer Range: 0 to 1000
Data	Number of Bytes	

6.33.2 SID 0x05 (5) SID_FlashStore_Response

CS-129291-DC2	© SiRF Technology, Inc., a member of the CSR plc group of companies 2009 This material is subject to SiRF's non-disclosure agreement.	Page 177 of 251
---------------	--	-----------------

DRAFT

DRAFT

 SiRF A CSR plc Company	One Socket Protocol ICD
	Revision 5.5 11/16/2009

This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Upon reception of the Bootloader ACK/NAK (for the FS command) from the Tracker, the Host will generate this response for the User System.

Table 220: Tracker Flash Store Response (unsolicited)

Field	Length (bytes)	Description
MID	1	0xB2
SID	1	0x05
Result	4	Zero = Flash write successful Non-zero = Flash write unsuccessful

6.33.3 SID 0x06 (6) SID_FlashErase_Response

Upon reception of the Bootloader ACK/NAK (for the FE command) from the Tracker, the Host will generate this response for the User System.

Table 221: Tracker Flash Erase Response (unsolicited)

Field	Length (bytes)	Description
MID	1	0xB2
SID	1	0x06
Result	4	Zero = Flash erase successful Non-zero = Flash erase unsuccessful

6.33.4 SID 0x07 (7) SID_TrackerConfig_Response

Upon reception of the MEI 0x81 (Acknowledge for MEI 0x0A) from the Tracker, the Host will generate this response for the User System.

Table 222: Tracker Configuration Response (unsolicited)

Field	Length (bytes)	Description
MID	1	0xB2
SID	1	0x07

6.33.5 SID 0x08 (8) SID_MeiToCustomIo_Response

Upon reception of the MEI 0x81 (Acknowledge for MEI 0x1F) from the Tracker, the Host will generate this response for the User System.

Table 223: Tracker Custom I/O Response (unsolicited)

Field	Length (bytes)	Description
MID	1	0xB2
SID	1	0x08

CS-129291-DC2	© SiRF Technology, Inc., a member of the CSR plc group of companies 2009 This material is subject to SiRF's non-disclosure agreement.	Page 178 of 251
---------------	--	-----------------

DRAFT



This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

Once the custom I/O has been started, note a hard reset will **NOT** restore the Tracker to the MEI protocol. The custom I/O selection is remembered as long as BBRAM is maintained or, depending on the firmware loaded, external flash memory is used.

6.33.6 SID 0x90 (144) SID Patch Manager Prompt

This message is sent by the 4e to acknowledge a Patch Manager Start Request.

Table 224: Patch Manager Start Request Message Definition

Field	Length (bytes)	Description
Message Id	1	0xB2
Sub Id	1	0x90
Chip Id	2	4e Chip Id (0x41)
Silicon Id	2	4e Silicon Id (0..15)
ROM Version Code	2	ROM Version code embedded in the 4e code in armstart.s
Patch Revision Code	2	Current version of Patch applied to the Flash/ROM code

Chip Id:

This field contains the chip version extracted from 4e chip version register.

Silicon Version:

This field contains the silicon version extracted from 4e chip version register.

ROM Version Code:

This field indicates a unique version code by which the ROM code running on the Target is identified. Value is interpreted as big endian number.

Patch Revision Code:


This field contains the version of Patch Code currently applied to the ROM chip. A value of 0 indicates that no Patch is applied. The value is interpreted as big endian number.

6.33.7 SID 0x91(145) SID Patch Manager Acknowledgement

This message is sent by the 4e to acknowledge the Host Patch Protocol messages: Patch Memory Load Request and Patch Manager Exit Request. If 4e is acknowledging the Patch Manager Exit Request the Message Sequence Number is set to 0, since there is no Message Sequence Number in the Patch Manager Exit Request.

Table 225: Patch Manager Acknowledgement Message Definition

Field	Length (bytes)	Description
Message Id	1	0xB2
Sub Id	1	0x91
Message Sequence Number	2	Message Sequence Number
Sub Id Acknowledged	1	The Host Sub Id message being acknowledged
Acknowledge Status	1	Status response

 <p>SiRF A CSR plc Company</p>	<h2>One Socket Protocol ICD</h2> <div style="border: 2px solid red; padding: 5px; display: inline-block; margin: 10px 0;"> This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control. </div> <p>Revision 5.5 11/16/2009</p>
--	---

Message Sequence Number:

The Sequence No field of the Patch Memory Load Request message being acknowledged. This field is set to 0, when acknowledging the Patch Manager Exit Request.

Sub Id Acknowledged:

This field echoes back the Sub Id of the Host message that is being acknowledged.

Acknowledge Status:

This field describes the status of the requested operation as per the following table:

Table 226: Patch Manager Acknowledge Status Bit Field Definition

Bit 1	Bit 0 (LSB)	Status
1	1	Message successfully received, Operation successful
1	0	Message successfully received, Operation unsuccessful

6.34 ASCII Data Output

Table 227: ASCII Data Output Message

Field	Type	Length (bytes)	Description
MID	U1	1	0xFF
msg_text	U256	256	ASCII string of the message. The actual text length is determined by message length parameter in the header. The msg_text string in this field is <u>not</u> null-terminated.

The ASCII text output can be enabled or disabled after restart using the restart flags of the initialization message MID 128.

6.35 Navigation Library (NL) Auxiliary Initialization Data

Table 228: General message information


Message Name	Navigation Library (NL) Auxiliary Initialization Data
Input or Output	Output
MID (Hex)	40
MID (Dec)	64
Message Name in Code	MID_NL_AuxData
SID (Hex)	01
SID (Dec)	1
SID Name in Code	NL_AUX_INIT_DATA

Table 229: Message Fields Description

Bytes	Binary (Hex)		Unit	ASCII (Dec)		Description
	Scale	Example		Scale	Example	

CS-129291-DC2	© SiRF Technology, Inc., a member of the CSR plc group of companies 2009 This material is subject to SiRF's non-disclosure agreement.	Page 180 of 251
---------------	--	-----------------

DRAFT

 <p>SiRF A CSR plc Company</p>	One Socket Protocol ICD	
	<div style="border: 2px solid red; padding: 5px; display: inline-block;"> This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control. </div>	
		Revision 5.5 11/16/2009


1 U		40			64	Message ID
1 U		01			1	Sub ID
4 U		00000155	usec		341	Uncertainty of the initial software time estimate.
2 U		0619			1561	Whole week number of recorded position if initializing from saved position, or zero otherwise.
4 U		000067AA	sec		26538	Time of week of recorded position if initializing from saved position, or zero otherwise.
2 U		0001	100m		1	Horizontal Position Uncertainty, 2dRMS, of the recorded position if initializing from saved position, or zero otherwise.
2 U		0004	m		4	Altitude uncertainty, 1 σ , of the recorded position if initializing from saved position, or zero otherwise.
1 U		30			48	Software version of the Tracker.
1 U		16			22	ICD version
2 U		0038			56	HW ID
4 U		00F9C57C	Hz		16369020	Default clock rate of the Tracker's internal clock.
4 U		00017FCE	Hz		98254	Default frequency offset of the Tracker's internal clock.
4 U		00000006			6	Tracker System Status, see bit field definition.
4 U		0			0	Reserved

Table 230: Bit Field Description

Tracker Status		
Bit Number	Field	Description
[0]	Status	0=Good 1=Bad
[1]	Cache	0=Disabled 1=Enabled
[2]	RTC Status	0=Invalid 1=Valid
[3-31]	Reserved	Reserved

DRAFT

DRAFT

 SiRF A CSR plc Company	One Socket Protocol ICD <div style="border: 2px solid red; padding: 5px; display: inline-block; margin: 10px 0;">This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control.</div> Revision 5.5 11/16/2009
--	--

6.35.1 Navigation Library (NL) Auxiliary Measurement Data

Table 231: Navigation Library (NL) Auxiliary Measurement Data

Message Name	Navigation Library (NL) Auxiliary Measurement Data
Input or Output	Output
MID (Hex)	40
MID (Dec)	64
Message Name in Code	MID_NL_AuxData
SID (Hex)	02
SID (Dec)	2
SID Name in Code	NL_AUX_MEAS_DATA

CSR Confidential - Not for external distribution

DRAFT

DRAFT



 <p>SiRF A CSR plc Company</p>	<h2>One Socket Protocol ICD</h2> <div style="border: 2px solid red; padding: 5px; display: inline-block; margin: 10px 0;"> <p>This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control.</p> </div> <p>Revision 5.5 11/16/2009</p>
--	--

Table 232: Navigation Library (NL) Auxiliary Measurement Data Message Field Definitions

Name	Bytes	Binary (Hex)		Unit	ASCII (Dec)		Description
		Scale	Example		Scale	Example	
Message ID	1 U		40			64	Message ID
Sub ID	1 U		02			2	Sub ID
SV ID	1 U		0E			14	Satellite PRN number
Status	1 U		06			6	General Tracker Status, see bit field definition.
Extended Status	1 U		02			2	Tracker Channel Status, see bit field definition.
Bit Sync Quality	1 U		FF			255	Confidence metric for bit sync.
Time Tag	4 U		DAC9762E	acqclk		3670636078	Measurement time tag.
Code Phase	4 U		64BB16B9	2^{-11} chips		1689982649	Code Phase
Carrier Phase	4 S		230D018A	L1 cycles		588054922	Carrier Phase
Carrier Frequency	4 S		0C800F43	0.000476 Hz		209719107	Carrier Frequency
Carrier Acceleration	2 S		0000	0.1 m/s/s		0	Carrier Acceleration (Doppler Rate)
Millisecond number	2 U		0008			8	Millisecond number, range 0 to 19.
Bit number	4 U		0186B15E			25604446	Bit number, range 0 to 30239999.
Code corrections	4 S		0000002E	1 cycle		46	For code smoothing
Smoothed code	4 S		FFFFFF769	2^{-10} cycles		-2199	For PR smoothing
Code offset	4 S		00001900	2^{-11} chips		6400	Code offset
Pseudorange Noise (Code Variance if soft tracking)	2 S		002E			46	Pseudorange noise estimate (one sigma). Normalized and left-shifted 16 bits.
Delta Range Quality (AFC Variance if soft tracking)	2 S		0077			119	Delta Range accuracy estimate (one sigma). Normalized and left-shifted 16 bits.
Phase Lock Quality (N/A if soft tracking)	2 S		FFDA			-38	Phase Lock accuracy estimate. Normalized and left-shifted 8 bits.

DRAFT

DRAFT

	One Socket Protocol ICD					
	This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control .					Revision 5.5 11/16/2009

Milliseconds uncertainty	2 S		0000			0	Not implemented
Sum Abs I	2 U		DD8A			56714	Sum I for this measurement
Sum Abs Q	2 U		0532			1330	Sum Q for this measurement
SV Bit Number	4 S		0186B130			25604400	Bit number of last SV bit available.
Mpath LOS Det Value	2 S		0002			2	Multipath line-of-sight detection value
Mpath Only Det Value	2 S		FFFF			-1	Multipath-only line-of-sight detection value
Recovery Status	1 U		00			0	Tracker Recovery Status, see bit field definition.
SW Time Uncertainty	4 U		00000065	usec		101	SW Time Uncertainty

Table 233: Navigation Library (NL) Auxiliary Measurement Data Status Bit Field definitions

Status	
Bit Field	Description
[0]	1 = Trickle Power Active
[1]	1 = Scalable Tracking Loop (STL) Active 0 = HW Tracking Loop (HWTL) Active
[2]	1 = SCL_MEAS Active

Table 234: Navigation Library (NL) Auxiliary Measurement Data Extended Status Bit Field definitions

Extended Status	
Bit Field	Description
[0]	Not use
[1]	1 = Subframe sync verified
[2]	1 = Possible cycle slip
[3]	1 = Subframe sync lost
[4]	1 = Multipath detected
[5]	1 = Multipath-only detected
[6]	1 = Weak frame sync done
[7]	Not use

DRAFT


 <p>SiRF A CSR plc Company</p>	<h2>One Socket Protocol ICD</h2> <div style="border: 2px solid red; padding: 5px; display: inline-block; margin: 10px 0;"> This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control. </div> <p>Revision 5.5 11/16/2009</p>
--	---

Table 235: Navigation Library (NL) Auxiliary Measurement Data Recovery Status Bit Field definitions

Recovery Status	
Bit Field	Description
[0]	1 = Weak Bit Sync (WBS) Active
[1]	1 = False Lock (not implemented)
[2]	1 = Bad PrePos, wrong Bit Sync
[3]	1 = Bad PrePos, wrong Frame Sync (not implemented)
[4]	1 = Bad PrePos, other
[5]	Not use
[6]	Not use
[7]	Not use

6.35.2 Navigation Library (NL) Aiding Initialization


Table 236: Navigation Library Aiding Initialization Message Definition

Message Name	Navigation Library (NL) Auxiliary Aiding Data
Input or Output	Output
MID (Hex)	40
MID (Dec)	64
Message Name in Code	MID_NL_AuxData
SID (Hex)	03
SID (Dec)	3
SID Name in Code	NL_AUX_AID_DATA

Table 237: Navigation Library Aiding Initialization Message Field Definitions

Name	Bytes	Binary (Hex)		Unit	ASCII (Dec)		Description
		Scale	Example		Scale	Example	
Message ID	1 U		40			64	Message ID
Sub ID	1 U		03			3	Sub ID
Position X	4 S		FFD700F9	m		-2686727	User Position X in ECEF
Position Y	4 S		FFBE5266	m		-4304282	User Position Y in ECEF
Position Z	4 S		003AC57A	m		3851642	User Position Z in ECEF
Horz Pos Unc	4 U		00007200	m		29184	Horizontal Position Uncertainty, 2 σ
Alt Unc	2 U		0064	m		100	Vertical Position Uncertainty
TOW	4 U		05265C00	msec		86400000	Software Time of Week

DRAFT

 <p>SiRF A CSR plc Company</p>	<h2>One Socket Protocol ICD</h2> <div style="border: 2px solid red; padding: 5px; display: inline-block; margin: 10px 0;"> This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control. </div> <p>Revision 5.5 11/16/2009</p>
--	---

6.36 Sensor Data Output Messages

Table 238: Sensor Data Output

Message Name	SENSOR_DATA
Input or Output	Output
MID (Hex)	0x48
MID (Dec)	72
Message Name in Code	MID_SensorData
SID (Hex)	Listed Below
SID (Dec)	Listed Below
SID Name in Code	Listed Below

Table 239: Sensor Control Input SID Descriptions

Field Being Described	
Bit Field	Description
0x01	SENSOR_READINGS
0x02	FACTORY_STORED_PARAMETERS
0x03	RCVR_STATE

Table 240: Sensor Data Readings Output Message information

Message Name	SENSOR_DATA
Input or Output	Output
MID (Hex)	0x48
MID (Dec)	72
Message Name in Code	MID_SensorData
SID (Hex)	0x01
SID (Dec)	1
SID Name in Code	SENSOR_READINGS

The message which is sent from the Measurement Engine to host containing sensor data as described in the table below. This message will be logged such that the sensor data can be post processed in NavOffline.

Table 241: Sensor Data Readings Output Message Fields Description

Name	Bytes	Binary (Hex)		Unit	ASCII (Dec)		Description
		Scale	Example		Scale	Example	
Message ID	U1		0x48			72	SENSOR_DATA
Sub ID	U1		0x01			1	SENSOR_READINGS
SENSOR_ID	U2					24	Identification for sensor
DATA_SET_LENGTH	U1					6	Number of Bytes per sensor data set
NUM_DATA_SET	U1					10	Number of data sets in the message

CS-129291-DC2	© SiRF Technology, Inc., a member of the CSR plc group of companies 2009 This material is subject to SiRF's non-disclosure agreement.	Page 186 of 251
---------------	--	-----------------

DRAFT

DRAFT

	One Socket Protocol ICD	
	This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control .	Revision 5.5 11/16/2009

DATA_MODE	U1					0	0 - Raw, 1 - Average,
TIMESTMP1	U4					11634 96250	Time stamp for Data set 1
DATA_1_XS1	U1					7	Data for Axis 1 for Set 1 MSB
...	U1					120	Data for Axis 1 for Set 1 LSB
DATA_2_XS1	U1					7	Data for Axis 2 for Set 1 MSB
...	U1					135	Data for Axis 2 for Set 1 LSB
DATA_3_XS1	U1					10	Data for Axis 3 for Set 1 MSB
...	U1					31	Data for Axis 3 for Set 1 LSB
TIMESTMP2	U4					11638 23798	Time stamp for Data set 2
DATA_1_XS2	U1					7	Data for Axis 1 for Set 2 MSB
...	U1					127	Data for Axis 1 for Set 2 LSB
DATA_2_XS2	U1					7	Data for Axis 2 for Set 2 MSB
...	U1					143	Data for Axis 2 for Set 2 LSB
DATA_3_XS2	U1					10	Data for Axis 3 for Set 2 MSB
...	U1					31	Data for Axis 3 for Set 2 LSB
.....							
.....							
TIMESTMP10	U4					11664 42866	Time stamp for Data set 10
DATA_1_XS10	U1					7	Data for Axis 1 for Set 10 MSB
...	U1					120	Data for Axis 1 for Set 10 LSB
DATA_2_XS10	U1					7	Data for Axis 2 for Set 10 MSB
...	U1					131	Data for Axis 2 for Set 10 LSB
DATA_3_XS10	U1					10	Data for Axis 3 for Set 10 MSB
...	U1					48	Data for Axis 3 for Set 10 LSB

SENSOR_ID

Identification for sensor. This can be the slave device address of the sensor. This field can support 10 bit addressing.

DATA_SET_LENGTH

Number of Bytes per sensor data set. Number of bytes would be 2, 4, or 6 based on 1,2, or 3 sensor axes

NUM_DATA_SET

Number of data sets in the message

DATA_MODE

Date Mode. Describes if the data is raw or averaged. Bit map is as follows:

- 0 - Raw,
- 1 - Average,
- 2- Sliding median,
- 3 through 15 – reserved,
- 16 through 32: Error codes

TIMESTMP1

CS-129291-DC2	© SiRF Technology, Inc., a member of the CSR plc group of companies 2009 This material is subject to SiRF's non-disclosure agreement.	Page 187 of 251
---------------	--	-----------------

DRAFT

DRAFT



One Socket Protocol ICD

This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

Time stamp for Data set 1. Time stamp is 4 Bytes of AcqClkCount recorded at the time of sampling sensor data.

DATA_1_XS1

Data for Axis 1 for Set 1

... ..

DATA_1_XS_NXS

Data for Axis (NUM_AXES) for Set 1

CSR Confidential - Not for external distribution

DRAFT



This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

TIMESTMP2

Time stamp for Data set 2. Time stamp is 4 Bytes of AcqClkCount recorded at the time of sampling sensor data

DATA_2_XS1

Data for Axis 1 for Set 2

... 2 ...

DATA_2_AXIS_NXS

Data for Axis (NUM_AXES) for Set 2

... ..

TIMESTMP_ND

Time stamp for Data set ND. Time stamp is 4 Bytes of AcqClkCount recorded at the time of sampling sensor data

DATA_ND_XS1

Data for Axis 1 for Set ND

... 2 ...

DATA_ND_AXIS_NXS

Data for Axis (NUM_AXES) for Set ND

Notes:


1. The sensor data message is being sent for each sensor separately.
2. This is a variable length message. The message payload length will be contained in the header of the message.
3. Only ADC counts for sensor measurements are being sent across. Conversion into appropriate units will be performed on the host. Host will have the configuration information with regards to each sensor identified with SENSOR_ID.
4. Time stamp is applied to the sensor data after the data has been read. For example, In case of reading 3-axes accelerometer, time-stamp will be applied to the acceleration data after all three axes have been read.
5. If the DATA_MODE is selected for averaging or sliding median, the applied time stamp would correspond to the time stamp for last sample collected.

Table 242: Sensor Data Readings Output Message information

Message Name	SENSOR_DATA
Input or Output	Output
MID (Hex)	0x48
MID (Dec)	72
Message Name in Code	MID_SensorData
SID (Hex)	0x02
SID (Dec)	2
SID Name in Code	FACTORY_STORED_PARAMTERS

This message will only be sent out after sensor initialization if any of the NUM_INIT_REG_READ_SEN_ is a non-zero value in the sensor configuration message received from the Host. This message will transfer a set of parameters that are stored in sensor EPROM at the time of factory testing. These parameters need to be read at the time of sensor module initialization and sent over to Host such that they can be used in

DRAFT

 <p>SiRF A CSR plc Company</p>	<h2>One Socket Protocol ICD</h2> <div style="border: 2px solid red; padding: 5px; display: inline-block; margin: 10px 0;"> <p style="color: red; font-size: small;">This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control.</p> </div> <p>Revision 5.5 11/16/2009</p>
--	--

subsequent calculations. These parameters also need to be logged such that they can be used in post processing in NavOffline.

Table 243: Sensor Data Readings Output Message Fields Description

Name	Bytes	Binary (Hex)		Unit	ASCII (Dec)		Description
		Scale	Example		Scale	Example	
Message ID			0x48			72	SENSOR_DATA
Sub ID	U1		0x02			2	FACTORY_STORED_PARAMETERS
SENSOR_ID	U2						Sensor ID
NUM_INIT_READ_REG_SEN	1						Number of registers to read from Sensor at the time of initialization
NUM_BYTES_REG1	1						Data read from Register 1 address at initialization
DATA_REG1	NUM_BYTES_REG1						Number of bytes read from Register 1 at initialization
NUM_BYTES_REG2	1						Data read from Register 2 address at time of initialization
DATA_REG2	NUM_BYTES_REG2						Number of bytes read from Register 2 at initialization
...							

SENSOR_ID

Identification for sensor. This identification is the unique slave device address of the sensor. This field can support 10 bit addressing.

NUM_INIT_READ_REG_SEN

Number of registers to read from Sensor at the time of initialization.

NUM_BYTES_REG1

Data read from Register 1 address at time of initialization

DATA_REG1 NUM_BYTES_REG1

Number of bytes read from Register 1 at initialization

NUM_BYTES_REG2

Data read from Register 2 address at time of initialization

DATA_REG2 NUM_BYTES_REG2

Number of bytes read from Register 2 at initialization

CS-129291-DC2	© SiRF Technology, Inc., a member of the CSR plc group of companies 2009 This material is subject to SiRF's non-disclosure agreement.	Page 190 of 251
---------------	--	-----------------

DRAFT

DRAFT

 SiRF A CSR plc Company	One Socket Protocol ICD
	Revision 5.5 11/16/2009

This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Table 244: Receiver State Output Message information

Message Name	SENSOR_DATA
Input or Output	Output
MID (Hex)	0x48
MID (Dec)	72
Message Name in Code	MID_SensorData
SID (Hex)	0x03
SID (Dec)	3
SID Name in Code	RCVR_STATE

This output message is sent each time the sensory logic perceives a signifying change in the state of the GPS receiver device. This is an unsolicited notification which can be enabled/disabled in the (MID_SensorControl, SENSOR_SWITCH) input message.

Table 245: Receiver State Output Message Field Description

Name	Bytes	Binary (Hex)		Unit	ASCII (Dec)		Description
		Scale	Example		Scale	Example	
Message ID	U1		0x48		72	SENSOR_DATA	
Sub ID	U1		0x03		3	RCVR_STATE	
RCVR_PHYSICAL_STATE	U1		0x01		1	State of the Receiver: 0 – Unknown 1 – Stationary 2 – Moving 3 – Reserved 1 4 – Reserved 2 5 – Reserved 3	

6.37 SirfDrive Output Messages

6.37.1 Msg-ID 0x29 (MID_GeodNavState)

MSG ID:

Number: 0x29
Name: MID_GeodNavState
Purpose: Geodetic Navigation State Output Message

Message Length:

91 bytes

Rate:

Output at 1Hz

DRAFT

DRAFT



One Socket Protocol ICD

This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009


Binary Message Definition:

Byte #	Field	Data Type	Bytes	Units	Range	Res
1	Message ID	UINT8	1		0x29	1
2-3	Nav Validity	UINT16	2	Bitmap	<p>Any bits not 0: Nav is Invalid</p> <p>Bit 0=1: GPS Fix Invalid Bit 1=1: EHPE exceeded (reserved) Bit 2=1: EVPE exceeded (reserved) Bit 3=1: DR data Invalid Bit 4=1: DR Cal Invalid Bit 5=1: GPS-based Cal not Available Bit 6=1: DR Pos Invalid Bit 7=1: DR Heading Invalid Bits 8-14: Reserved Bit 15 = 1: No Tracker Data</p>	1
4-5	NAV Mode	UINT16	2	Bitmap	<p>NAV Mode Bits definition⁹:</p> <p>GPS Fix Type: <u>bits 2-0: SVs Used</u> 000 No NAV 001 1 SV solution 010 2 SV solution 011 3 SV solution (2D) 100 4 or More SV (3D) 101 Least Sq 2D fix 110 Least Sq 3D fix 111 DR solution (0 SV)</p> <p><u>bit 3=1: Trickle Power On</u></p> <p><u>bits 5-4 Altitude hold</u> 00 No Altitude Hold 01 Filter Altitude used 10 Use Altitude used 11 User Forced Altitude</p> <p>bit 6 = 1: DOP exceeded bit 7 = 1: DGPS corrections bit 8 = 1: Sensor Based DR = 0: if bit 2-0=111, Velocity DR bit 9 = 1: Sol Validated bit 10 = 1: VEL DR Timeout bit 11 = 1: Edited by UI bit 12 = 1: Velocity Invalid bit 13 = 1: Altitude Hold disabled bits 15-14 – SiRFDrive DR status: 00 – GPS Only 01 – Calibrating 10 – DR sensor error 11 – DR Test mode</p>	1
6-7	Extended Week Number	UINT16	2	week	0 to 65535	1
8-11	TOW	UINT32	4	sec	0 to 604800.00	0.001
12-13	UTC Year	UINT16	2	year	1980 to 3000	1
14	UTC Month	UINT8	1	month	1 to 12	1
15	UTC Day	UINT8	1	day	1 to 31	1
16	UTC Hour	UINT8	1	hr	0 to 23	1

⁹ Bits 15-14 only have meaning when bit 8 is 0.

DRAFT

DRAFT

 SiRF <small>A CSR plc Company</small>	One Socket Protocol ICD
<div style="border: 2px solid red; padding: 5px; color: red; font-weight: bold;"> This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control. </div>	Revision 5.5 11/16/2009

17	UTC Minute	UINT8	1	min	0 to 59	1
18-19	UTC Second	UINT16	2	sec	0 to 59	0.001
20-23	Satellites in Solution	UINT32	4	Bit Map	Bit 0 = 1: SV1 Bit 1 = 1: SV2 ... Bit 31 = 1: SV32	
24-27	Latitude	INT32	4	deg	-90 to 90	10 ⁻⁷
28-31	Longitude	INT32	4	deg	-180 to 180	10 ⁻⁷
32-35	Altitude from Ellipsoid	INT32	4	meters	-2000 to 100000.0	.01
36-39	Altitude from MSL ¹⁰	INT32	4	meters	-2000 to 100000.0	.01
40	Map Datum	UINT8	1		0-255	
41-42	Speed Over Ground (SOG)	UINT16	2	m/sec	0-655	.01
43-44	Course Over Ground (COG, True) ¹¹	UINT16	2	deg	0 to 360	.01
45-46	Magnetic Variation (RESERVED)	INT16	2	deg	-90 to 90	.01
47-48	Climb Rate	INT16	2	m/sec	-300 to 300	.01
49-50	Heading Rate	INT16	2	deg /sec	-300 to 300	.01
51-54	Expected Horizontal Position Error (EHPE)	UINT32	4	meters	0 to 6000000	.01
55-58	Expected Vertical Position Error (EVPE)	UINT32	4	meters	0 to 24000	.01
59-62	Expected Time Error (ETE)	UINT32	4	meters	0 to 6000000	.01
63-64	Expected Horizontal Velocity Error (EHVE)	UINT16	2	m/sec	0 to 655	.01
65-68	Clock Bias	INT32	4	meters	-21474837 to 21474837	.01
69-72	Clock Bias Error	UINT32	4	meters	0 to 6000000	.01
73-76	Clock Drift	INT32	4	m/sec	-21474837 to 21474837	.01
77-80	Clock Drift Error	UINT32	4	m/sec	0 to 1000	.01
81-84	Distance Traveled since RESET	UINT32	4	meters	0 to 4294967295	1
85-86	Distance Traveled error	UINT16	2	meters	65535	1
87-88	Heading Error	UINT16	2	deg	0 to 180	.01
89	Number of Satellites in Solution	UINT8	1	integer	0 -12	1
90	HDOP	UINT8	1	integer	0..51	0.2

¹⁰ Altitude above MSL = Altitude from Ellipsoid – Geoidal Separation

¹¹ Also know as Heading(Hdg)

DRAFT

DRAFT

 SiRF A CSR plc Company	One Socket Protocol ICD <div style="border: 2px solid red; padding: 5px; display: inline-block; color: red; font-weight: bold;">This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control.</div> Revision 5.5 11/16/2009
--	--

91	AdditionalModeInfo	UINT8	1	Bitmap	<u>Bit 7: DR direction</u> 0 = forward 1 = reverse <u>Bits 6-3: reserved</u> <u>Bit 2: MMF usage</u> 0 = used in solution 1 = not used in solution <u>Bit 1: MMF received</u> 0 = not received 1 = received <u>Bit 0: MMF mode</u> 0 = disabled 1 = enabled	1
----	--------------------	-------	---	--------	---	---

API:

```
typedef struct
{
    UINT16 Valid
    UINT16 Mode
    UINT16 Week
    UINT32 TOW
    UINT16 UtcYr;
    UINT8 UtcMth;
    UINT8 UtcDay;
    UINT8 UtcHr;
    UINT8 UtcMin;
    UINT16 UtcSec;
    UINT32 SVIDList;
    INT32 Lat;
    INT32 Lon;
    INT32 AltE;
    INT32 AltM;
    UINT8 Datum;
    UINT16 Sog;
    UINT16 Hdg;
    INT16 MagVar;
    INT16 ClmbRte;
    INT16 HdRte
    UINT32 Ehpe;
    UINT32 Evpe;
    UINT32 Ete
    UINT16 Ehve;
    INT32 ClkBias
    UINT32 ClkBiasE
    INT32 ClkDrift
    UINT32 ClkDriftE
    UINT32 Trvled;
    UINT16 TrvledE
```

CS-129291-DC2	© SiRF Technology, Inc., a member of the CSR plc group of companies 2009 This material is subject to SiRF's non-disclosure agreement.	Page 194 of 251
---------------	--	-----------------

DRAFT

DRAFT



One Socket Protocol ICD

This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

```
UINT16 HdE;  
UINT8  SVIDCnt;  
UINT8  HDOP;  
UINT8  AdditionalModeInfo;  
} MI_GEOD_NAV_STATE;
```

6.37.2 Msg-ID 0x2D (MID_TrkADCOdoGPIO)

MSG ID:

Number: 0x2D
Name: MID_TrkADCOdoGPIO
Purpose: Output Tracker to NAV – ADC/ODOMETER DATA

Message Length:

111 bytes @ 1Hz or 12 bytes @ 10Hz

Rate:

111 bytes @ 1Hz or 12 bytes @ 10Hz

Binary Message Definition:

This message is sent at a rate of 1Hz (default) or 10Hz whenever it is enabled by the control words in the Track Reset message on the GSP2t. Both ADC channels are sampled in a round-robin fashion at 50Hz whose raw measurements are then averaged every 100mSeconds in the tracker interrupt along with the current odometer counter value and GPIO states. The GSP2t Rev D on-chip ADC is a 14-bit successive approximation two channel ADC outputting signed 16-bit values from -12000 to 28000.

The GSP2eLP with DR option currently only has one ADC input that is sampled at 50Hz and whose raw measurements are then averaged every 100mSeconds in the tracker interrupt along with the current odometer counter and GPIO state. The DR option is a Maxim MAX1240 12-bit ADC on a daughter-board installed on the SDKL. The 12-bit resolution provides unsigned values from 0 to 4095.

On the GSP2t, this message can be transmitted in 1Hz mode or 10Hz mode. On the GSP2eLP, this message is only transmitted in 1Hz mode. In 1Hz mode, there are 10 data measurement blocks in one single message. In 10Hz mode, there is a single data measurement per message.

DRAFT

DRAFT

 <p>SiRF A CSR plc Company</p>	<h2>One Socket Protocol ICD</h2> <div style="border: 2px solid red; padding: 5px; display: inline-block; margin: 10px 0;"> <p style="color: red; font-size: small;">This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control.</p> </div> <p>Revision 5.5 11/16/2009</p>
--	--

Byte #	Field	Data Type	Bytes	Units	Range	Res
1	Message ID	UINT8	1	n/a	0x2D	n/a
2 + (n-1)*11 (Note 0)	currentTime (Note 1)	UINT32	4	ms	0-4294967295	n/a
6 + (n-1)*11 (Note 0)	Gyro adc Avg (Note 2)	UINT16 Or INT16	2	n/a	0 to 4095 (GSP2eLP w/ DR option) Or -12000 to 28000 (GSP2t)	n/a
8 + (n-1)*11 (Note 0)	adc3Avg (Note 3)	UINT16 Or INT16	2	n/a	0 (GSP2eLP w/ DR option) Or -12000 to 28000 (GSP2t)	n/a
10 + (n-1)*11 (Note 0)	odoCount (Note 4)	UINT16	2	n/a	0 to 65535	n/a
12 + (n-1)*11 (Note 0)	gpioStat (Note 5)	UINT8	1	Bit Map	bit 0 – if = 1: Reverse “ON” bits 1 to 7 Reserved	n/a
<p>Note 0: n corresponds to either 1 or 1-10 depending on whether the message comes out a 10Hz (10 messages 1 data set) or 1Hz (1 message 10 data sets)</p> <p>Note 1: Tracker Time, millisecond counts</p> <p>Note 2: Averaged measurement from Gyro input. On the GSP2t, this is the ADC[2] input, on the GSP2eLP, this is the Maxim ADC input</p> <p>Note 3: On a GSP2eLP system, there is currently only one ADC input so this field is always 0.</p> <p>Note 4: Odometer counter measurement at the most recent 100mSec tracker interrupt. This field will rollover to 0 after 65535</p> <p>Note 5: GPIO input states at the most recent 100mSec tracker interrupt</p>						

API:

```
#define NUM_OF_DR_RAW 10

typedef struct
{
    UINT32 currentTime;
    UINT16 adc2Avg;
    UINT16 adc3Avg;
    UINT16 odoCount;
    UINT8 gpioStat;
} tADCOdometer;


typedef struct
{
    struct
    {
        tADCOdometer ADCOdometer[NUM_OF_DR_RAW];
    } DrRaw;

} tDrRawData, *tDrRawDataPtr;
```

CS-129291-DC2	© SiRF Technology, Inc., a member of the CSR plc group of companies 2009 This material is subject to SiRF's non-disclosure agreement.	Page 196 of 251
---------------	--	-----------------

DRAFT

DRAFT

 SiRF A CSR plc Company	One Socket Protocol ICD <div style="border: 2px solid red; padding: 5px; display: inline-block; color: red; font-weight: bold;">This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control.</div> Revision 5.5 11/16/2009
--	---

6.37.3 Msg-ID 0x30;Sub-ID 0x01 (SID_DrNavStatus)

MSG ID:

Number: 0x30
Name: MID_DrOut

SUB ID:

Number: 0x01
Name: SID_DrNavStatus
Purpose: DR NAV Status Output Message

Message Length:

20 bytes

Rate:


Output at 1HZ

Binary Message Definition:

Byte #	Field	Data Type	Bytes	Units	Range	Res
1	Message ID	UINT8	1		0x30	1
2	Sub ID	UINT8	1		0x01	1
3.0 – 3.6	DR Navigation Valid (Note 1)	Bit Map	1	N/A	All bits 0: True Any bits != 0 : False Bit 0 = 1: GPS Only Required Bit 1 = 1: Speed != 0 at startup Bit 2 = 1: DR Position Valid = False Bit 3 = 1: DR Heading Valid = False Bit 4 = 1: DR Calibration Valid = False Bit 5 = 1: DR Data Valid = False Bit 6 = 1: System has gone into Cold Start (Note 2)	N/A
3.7	Reserved					

DRAFT

DRAFT

 SiRF <small>A CSR plc Company</small>	<h2 style="margin: 0;">One Socket Protocol ICD</h2> <div style="border: 2px solid red; padding: 5px; margin: 10px 0;"> <p style="margin: 0; font-size: small;">This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control.</p> </div> <p style="margin: 0;">Revision 5.5 11/16/2009</p>
--	--

4 -5	DR Data Valid (Note 1)	Bit Map	2	N/A	<p>All bits 0: True Any bits != 0 : False</p> <p>Bit 0 = 1: DR Gyro Subsystem Operational = False Bit 1 = 1: DR Speed Subsystem Operational = False Bit 2 = 1: DR. Measurement Time < 0 Bit 3 = 1: Input serial DR message checksum Invalid Bit 4 = 1: No DR Data for > 2 seconds Bit 5 = 1: DR Data timestamp did not advance Bit 6 = 1: DR data bytes all 0x00 or all 0xFF Bit 7 = 1: Composite wheeltick count jumped by more than 400 between successive DR messages Bit 8 = 1: Input Gyro data bits (15) value of 0x0000 or 0x3FFF Bit 9 = 1: More than 10 DR messages in one second Bit 10 = 1: Delta Time <= 0 Bit 11-15: Reserved (Note 2)</p>	N/A
6.0 – 6.3	DR Calibration Valid (Note 1)	Bit Map	1	N/A	<p>All bits 0: True Any bits != 0 : False</p> <p>Bit 0 = 1: DR Gyro Bias Cal Valid = False Bit 1 = 1: DR Gyro Scale Factor Cal Valid = False Bit 2 = 1: DR Speed Scale Factor Cal Valid = False Bit 3 = 1: GPS Calibration is required and is not yet available (Note 2)</p>	N/A
6.4 – 6.6	DR Gyro Bias Cal Valid (Note 1)	Bit Map		N/A	<p>All bits 0: True Any bits != 0 : False</p> <p>Bit 0 = 1: DR Data Valid = False Bit 1 = 1: Zero-Speed Gyro Bias Calibration was Updated = False Bit 2 = 1: Heading Rate Scale Factor <= -1 (Note 2)</p>	N/A
6.7	Reserved					
7.0 – 7.3	DR Gyro Scale Factor Cal Valid (Note 1)	Bit Map	1	N/A	<p>All bits 0: True Any bits != 0 : False</p> <p>Bit 0 = 1: DR Heading Valid = False Bit 1 = 1: DR Data Valid = False Bit 2 = 1: DR Position Valid = False Bit 3 = 1: Heading Rate Scale Factor <= -1 (Note 2)</p>	N/A
7.4 – 7.7	DR Speed Scale Factor Cal Valid (Note 1)	Bit Map		N/A	<p>All bits 0: True Any bits != 0 : False</p> <p>Bit 0 = 1: DR Data Valid = False Bit 1 = 1: DR Position Valid = False Bit 2 = 1: GPS Velocity Valid For Dr = False Bit 3 = 1: DR Speed Scale Factor <= -1 (Note 2)</p>	N/A
8.0 – 8.1	DR Nav Valid Across Reset (Note 1)	Bit Map	1	N/A	<p>All bits 0: True Any bits != 0 : False</p> <p>Bit 0 = 1: DR Navigation Valid = False Bit 1 = 1: Speed > 0.1 m/sec (Note 2)</p>	N/A
8.2	Reserved					

DRAFT

DRAFT

 SiRF <small>A CSR plc Company</small>	One Socket Protocol ICD
This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control .	Revision 5.5 11/16/2009

8.3 – 8.6	DR Position Valid (Note 1)	Bit Map		N/A	All bits 0: True Any bits != 0 : False Bit 0 = 1: Speed != 0 at startup Bit 1 = 1: Valid GPS Position is Required and GPS Position Valid = False Bit 2 = 1: System has gone into Cold Start Bit 3 = 1: DR Data Valid = False (Note 2)	N/A
8.7	Reserved					
9.0 – 9.6	DR Heading Valid (Note 1)	Bit Map	1	N/A	All bits 0: True Any bits != 0 : False Bit 0 = 1: Speed != 0 at startup Bit 1 = 1: Valid GPS Position is Required and GPS Position Valid = False Bit 2 = 1: Valid GPS Speed is Required and GPS Speed Valid = False Bit 3 = 1: GPS Updated Heading = False Bit 4 = 1: (Delta GPS Time <= 0.0) (Delta GPS Time >= 2.0) Bit 5 = 1: System has gone into Cold Start Bit 6 = 1: DR Data Valid = False (Note 2)	N/A
9.7	Reserved					
10.0 – 10.2	DR Gyro Subsystem Operational (Note 1)	Bit Map	1	N/A	All bits 0: True Any bits != 0 : False Bit 0 = 1: High, Persistent Turn Rate Bit 1 = 1: Low, Persistent Turn Rate Bit 2 = 1: Gyro Turn Rate Residual is Too Large (Note 2)	N/A
10.3	Reserved					
10.4 – 10.6	DR Speed Subsystem Operational (Note 1)	Bit Map		N/A	All bits 0: True Any bits != 0 : False Bit 0 = 1: DR Speed Data = 0 when GPS Speed != 0 Bit 1 = 1: DR Speed Data != 0 when GPS Speed = 0 Bit 2 = 1: DR Speed Residual is Too Large (Note 2)	N/A
10.7	Reserved					
11.0 – 11.2	DR Nav State Integration Ran (Note 1)	Bit Map	1	N/A	All bits 0: True Any bits != 0 : False Bit 0 = 1: DR Position Valid = False Bit 1 = 1: DR Heading Valid = False Bit 2 = 1: DR Data Valid = False (Note 2)	N/A
11.3	Reserved					
11.4 – 11.6	Zero-Speed Gyro Bias Calibration was Updated (Note 1)	Bit Map		N/A	All bits 0: True Any bits != 0 : False Bit 0 = 1: GPS Speed > 0.1 m/sec Bit 1 = 1: Zero Speed During Cycle = False Bit 2 = 1: Zero Speed Previous = False (Note 2)	N/A
11.7	Reserved					
12.0 – 12.3	DR Gyro Bias and Scale Factor Calibration was Updated (Note 1)	Bit Map	1	N/A	All bits 0: True Any bits != 0 : False Bit 0 = 1: DR Data Valid = False Bit 1 = 1: DR Position Valid = False Bit 2 = 1: GPS Velocity Valid For DR = False Bit 3 = 1: GPS Updated Heading = False (Note 2)	N/A

DRAFT

DRAFT

 <p>SiRF A CSR plc Company</p>	<h2>One Socket Protocol ICD</h2> <div style="border: 2px solid red; padding: 5px; display: inline-block; margin: 10px 0;"> <p>This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control.</p> </div> <p>Revision 5.5 11/16/2009</p>
---	--

12.4 – 12.6	DR Speed Calibration was Updated (Note 1)	Bit Map		N/A	All bits 0: True Any bits != 0 : False Bit 0 = 1: DR Data Valid = False Bit 1 = 1: DR Position Valid = False Bit 2 = 1: GPS Velocity Valid For DR= False (Note 2)	N/A
12.7	DR Updated the Navigation State (Note 1)	Bit Map		N/A	All bits 0: True Any bits != 0 : False Bit 0 = 1: DR Navigation Valid = False (Note 2)	N/A
13.0 – 13.7	GPS Updated Position (Note 1)	Bit Map	1	N/A	All bits 0: True Any bits != 0 : False Bit 0 = 1: Update Mode != KALMAN Bit 1 = 1: EHE too large (i.e. EHE > 10.0) Bit 2 = 1: no previous GPS Kalman update < 4 sats Bit 3 = 1: GPS EHPE > DR EHPE Bit 4 = 1: DR EHPE < 10 even if GPS EHPE < DR EHPE Bit 5 = 1: Less than 4 satellites Bit 6 = 1: 0 satellites Bit 7 = 1: DR NAV Only Required (Note 2)	N/A
14.0 – 14.6	GPS Updated Heading (Note 1)	Bit Map	1	N/A	All bits 0: True Any bits != 0 : False Bit 0 = 1: Update Mode != KALMAN Bit 1 = 1: GPS Speed <= 2.0 m/sec Bit 2 = 1: < 4 sats Bit 3 = 1: Horizontal Velocity Variance > 1.0 (m/sec)*(m/sec) Bit 4 = 1: GPS Heading Error >= DR Heading Error * 1.2 Bit 5 = 1: GPS Kalman Filter Updated = False Bit 6 = 1: Initial Speed Transient Complete = False (Note 2)	N/A
14.7	Reserved					
15.0 – 15.2	GPS Position Valid for DR (Note 1)	Bit Map	1	N/A	All bits 0: True Any bits != 0 : False Bit 0 = 1: < 4 sats Bit 1 = 1: EHPE > 30 Bit 2 = 1: GPS Updated Position = False (Note 2)	N/A
15.3	Reserved					
15.4 – 15.7	GPS Velocity Valid for DR (Note 1)	Bit Map		N/A	All bits 0: True Any bits != 0 : False Bit 0 = 1: GPS Position Valid for DR = False Bit 1 = 1: EHVE > 3 Bit 2 = 1: GPS Speed < 2 m/sec Bit 3 = 1: GPS did not update the Heading (Note 2)	N/A
16.0 – 16.1	DWS Heading Rate Scale Factor Calibration Validity	Bit Map	1	N/A	All bits 0: True Any bits != 0 : False Bit 0 : 1 = Heading Rate Scale Factor <= -1.0 Bits 1 – 7: = Reserved	N/A
16.2 – 16.7	Reserved					

DRAFT

DRAFT

 <p>SiRF A CSR plc Company</p>	<h2>One Socket Protocol ICD</h2> <div style="border: 2px solid red; padding: 5px; display: inline-block; margin: 10px 0;"> <p>This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control.</p> </div> <p>Revision 5.5 11/16/2009</p>
--	--

17.0 – 17.6	DWS Heading Rate Scale Factor Calibration Was Update	Bit Map	1	N/A	<p>All bits 0: True Any bits != 0 : False</p> <p>Bit 0 : 1 = GPS Heading Rate is not valid Bit 1 : 1 = Absolute value of GPS Heading Rate < 5.0 Bit 2 : 1 = Absolute value of GPS Heading Rate >= 90.0 Bit 3 : 1 = Left Rear Speed SF Cal is not valid Bit 4 : 1 = Right Rear Speed SF Cal is not valid Bit 5 : 1 = Absolute value of prev Rear Axle Hd Rt <= 0.0 Bit 6 : 1 = (GPS Hd Rt * prev Rear Axle Hd Rt) <= 1.0 Bit 7 : = reserved</p>	N/A
17.7	Reserved					
18.0 – 19.7	DWS Speed Scale Factor Calibration Validity	Bit Map	2	N/A	<p>All bits 0: True Any bits != 0 : False</p> <p>Bit 0 : 1 = Right Rear Speed SF <= -1.0 Bit 1 : reserved for RR status Bit 2 : reserved for RR status Bit 3 : reserved for RR status Bit 4 : 1 = Left Rear Speed SF <= -1.0 Bit 5 : reserved for LR status Bit 6 : reserved for LR status Bit 7 : reserved for LR status Bit 8 : 1 = Right Front Speed SF <= -1.0 Bit 9 : reserved for RF status Bit 10: reserved for RF status Bit 11: reserved for RF status Bit 12: 1 = Left Front Speed SF <= -1.0 Bit 13: reserved for LF status Bit 14: reserved for LF status Bit 15: reserved for LF status</p>	N/A
20.0 – 20.5	DWS Speed Scale Factor Cal was updated	Bit Map	1	N/A	<p>All bits 0: True Any bits != 0 : False</p> <p>Bit 0 : 1 = GPS Speed is not valid for DR Bit 1 : 1 = GPS Heading Rate is not valid Bit 2 : 1 = Absolute value of GPS Hd Rate >= 0.23 Bit 3 : 1 = GPS Heading Rate Error >= 0.5 Bit 4 : 1 = Average GPS Speed <= 0.0 Bit 5 : 1 = DR Position is not valid Bits 6 – 7 : reserved</p>	N/A
20.6 – 20.7	Reserved					

Note 1: The bit map of the Field variable reports the status. If all the bits in the bit map are zero (0), then the status of the variable = Valid. Otherwise, if any of the bits in the bit map are set = 1, then the status of the variable = Not Valid, and the individual bits give the reason why.

Note 2: The individual bits are referenced by their offset from the start of the bit map, starting with offset 0 for the LSB of the Least-Significant byte.

API:

```
typedef struct
{
    UINT8  Nav;
    UINT16 Data;
    UINT8  Cal_GbCal;
```

CS-129291-DC2	© SiRF Technology, Inc., a member of the CSR plc group of companies 2009 This material is subject to SiRF's non-disclosure agreement.	Page 201 of 251
---------------	--	-----------------

DRAFT

DRAFT



One Socket Protocol ICD

This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

```
UINT8 GsfCal_SsfCal;  
UINT8 NavAcrossReset_Pos ;  
UINT8 Hd;  
UINT8 GyrSubOp_SpdSubOp;  
UINT8 NavStIntRan_ZGbCalUpd;  
UINT8 GbsfCalUpd_SpdCalUpd_UpdNavSt;  
UINT8 GpsUpdPos;  
UINT8 GpsUpdHd;  
UINT8 GpsPos_GpsVel;  
UINT8 DWSHdRtSFCalValid;  
UINT8 DWSHdRtSFCalUpd;  
UINT16 DWSSpdSFCalValid;  
UINT8 DWSSpdSFCalUpd ;  
} MI_DR_NAV_STATUS;
```

6.37.4 Msg-ID 0x30;Sub-ID 0x02 (SID_DrNavState)

MSG ID:

Number: 0x30
Name: MID_DrOut

SUB ID:

Number: 0x02
Name: SID_DrNavState
Purpose: DR NAV State Output Message

Message Length:

75 bytes

Rate:

Output at 1HZ

Binary Message Definition:

Byte #	Field	Data Type	Bytes	Units	Range	Res
1	Message ID	UINT8	1	n/a	0x30	1
2	Sub-ID	UINT8	1	n/a	0x02	1
3 - 4	DR Speed	UINT16	2	m/sec	0 to 655	.01
5 - 6	DR Speed Error	UINT16	2	m/sec	0 to 655	.01
7 - 8	DR Speed Scale Factor (Note 1)	INT16	2	n/a	-1 to 3	.0001
9 - 10	DR Speed Scale Factor Error	UINT16	2	n/a	0 to 3	.0001
11 - 12	DR Heading Rate	INT16	2	deg/sec	-300 to 300	.01
13 - 14	DR Heading Rate Error	UINT16	2	deg/sec	0 to 300	.01
15 - 16	DR Gyro Bias	INT16	2	deg/sec	-300 to 300	.01

DRAFT

DRAFT



One Socket Protocol ICD

This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

17 – 18	DR Gyro Bias Error	UINT16	2	deg/sec	0 to 300	.01
19 – 20	DR Gyro Scale Factor (Note 1)	INT16	2	n/a	-1 to 3	.0001
21 – 22	DR Gyro Scale Factor Error	UINT16	2	n/a	0 to 3	.0001
23 – 26	Total DR Position Error	UINT32	4	meters	0 to 6000000	.01
27 – 28	Total DR Heading Error	UINT16	2	deg	0 to 180	.01
29	DR Nav Mode Control	UINT8	1	Bitmap	bit 0 :1 = GPS-Only Navigation required (No DR NAV Allowed) bit 1: 1 = OK to do DR Nav with default or SRAM calibration bit 2: 1 = DR Nav OK if using current GPS calibration bit 3: 1 = DR Only Navigation	1
30	DR Direction	UINT8	1	boolean	0: forward 1: reverse	1
31 – 32	DR Heading	UINT16	2	deg/sec	0 to 360	.01
33	SensorPkg	UINT8	1	n/a	0 = Gyro and Odo 1 = Wheel Speed and Odo	1
34 – 35	Odometer Speed	UINT16	2	m/sec		0.01
36 – 37	Odometer Speed Scale Factor (Note 1)	INT16	2	n/a		0.0001
38 – 39	Odometer Speed Scale Factor Error	UINT16	2	n/a		0.0001
40 – 41	Left Front Wheel Speed Scale Factor (Note 1)	INT16	2	n/a		0.0001
42 - 43	Left Front Wheel Speed Scale Factor Error	UINT16	2	n/a		0.0001
44 - 45	Right Front Wheel Speed Scale Factor (Note 1)	INT16	2	n/a		0.0001
46 - 47	Right Front Wheel Speed Scale Factor Error	UINT16	2	n/a		0.0001
48 – 49	Left Rear Wheel Speed Scale Factor (Note 1)	INT16	2	n/a		0.0001
50 – 51	Left Rear Wheel Speed Scale Factor Error	UINT16	2	n/a		0.0001
52 – 53	Right Rear Wheel Speed Scale Factor (Note 1)	INT16	2	n/a		0.0001
54 – 55	Right Rear Wheel Speed Scale Factor Error	UINT16	2	n/a		0.0001
56 – 57	Rear Axle Speed Delta	INT16	2	m/sec		0.01
58 – 59	Rear Axle Average Speed	UINT16	2	m/sec		0.01
60 – 61	Rear Axle Speed Error	UINT16	2	m/sec		0.01
62 – 63	Rear Axle Heading Rate	INT16	2	deg/sec		0.01
64 – 65	Rear Axle Heading Rate Error	UINT16	2	deg/sec		0.01
66 – 67	Front Axle Speed Delta	INT16	2	m/sec		0.01
68 –	Front Axle Average Speed	UINT16	2	m/sec		0.01

DRAFT

DRAFT

 SiRF A CSR plc Company	One Socket Protocol ICD		
	This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control.		
			Revision 5.5 11/16/2009

69						
70 – 71	Front Axle Speed Error	UINT16	2	m/sec		0.01
72 – 73	Front Axle Heading Rate	INT16	2	deg/sec		0.01
74 - 75	Front Axle Heading Rate Error	UINT16	2	deg/sec		0.01
Note 1: Scale Factor is defined: True = Measured / (1 + Scale Factor)						

API:

typedef struct

```
{
  UINT16      Spd;
  UINT16      SpdE;
  INT16       Ssf;
  UINT16      SsfE;
  INT16       HdRte;
  UINT16      HdRteE;
  INT16       Gb;
  UINT16      GbE;
  INT16       Gsf;
  UINT16      GsfE;
  UINT32      TPE;
  UINT16      THE;
  UINT8       NavCtrl
  UINT8       Reverse;
  UINT16      Hd;
  UINT8       SensorPkg;
  UINT16      OdoSpd;
  INT16       OdoSpdSF;
  UINT16      OdoSpdSFErr
  INT16      LFWheelSpdSF;
  UINT16      LFWheelSpdSFErr
  INT16      RFWheelSpdSF;
  UINT16      RFWheelSpdSFErr;
  INT16      LRWheelSpdSF;
  UINT16      LRWheelSpdSFErr;
  INT16      RRWheelSpdSF;
  UINT16      RRWheelSpdSFErr;
  INT16      RearAxleSpdDelta;
  UINT16      RearAxleAvgSpd;
  UINT16      RearAxleSpdErr;
  INT16      RearAxleHdRt;
  UINT16      RearAxleHdRtErr;
  INT16      FrontAxleSpdDelta;
  UINT16      FrontAxleAvgSpd;
  UINT16      FrontAxleSpdErr;
  INT16      FrontAxleHdRt
  UINT16      FrontAxleHdRtErr;
} MI_DR_NAV_STATE;
```

CS-129291-DC2	© SiRF Technology, Inc., a member of the CSR plc group of companies 2009 This material is subject to SiRF's non-disclosure agreement.	Page 204 of 251
---------------	--	-----------------

DRAFT

DRAFT



One Socket Protocol ICD

This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

6.37.5 Msg-ID 0x30;Sub-ID 0x03 (SID_NavSubSys)

MSG ID:

Number: 0x30
Name: MID_DrOut

SUB ID:

Number: 0x03
Name: SID_NavSubSys
Purpose: NAV Subsystems Data Output Message

Message Length:

36 bytes

Rate:

Output at 1HZ

Binary Message Definition:

Byte #	Field	Data Type	Bytes	Units	Range	Res
1	Message ID	UINT8	1	n/a	0x30	n/a
2	Sub-ID	UINT8	1	n/a	0x03	n/a
3-4	GPS Heading Rate	INT16	2	deg/sec	-300 to 300	.01
5-6	GPS Heading Rate Error	UINT16	2	deg/sec	0 to 300	.01
7-8	GPS Heading (True)	UINT16	2	deg	0 to 360	.01
9-10	GPS Heading Error	UINT16	2	deg	0 to 180	.01
11-12	GPS Speed	UINT16	2	m/sec	0 to 655	.01
13-14	GPS Speed Error	UINT16	2	m/sec	0 to 655	.01
15-18	GPS Position Error	UINT32	4	meters	0 to 6000000	.01
19-20	DR Heading Rate	INT16	2	deg/sec	-300 to 300	.01
21-22	DR Heading Rate Error	UINT16	2	deg/sec	0 to 300	.01
23-24	DR Heading (True)	UINT16	2	deg	0 to 360	.01
25-26	DR Heading Error	UINT16	2	deg	0 to 180	.01
27-28	DR Speed	UINT16	2	m/sec	0 to 655	.01
29-30	DR Speed Error	UINT16	2	m/sec	0 to 655	.01
31-34	DR Position Error	UINT32	4	meters	0 to 6000000	.01
35-36	Reserved	UINT16	2	n/a	undefined	n/a

API:

```
typedef struct  
{  
    INT16 GpsHdRte;  
    UINT16 GpsHdRteE;  
    UINT16 GpsHd;  
    UINT16 GpsHdE;  
    UINT16 GpsSpd;  
    UINT16 GpsSpdE;  
}
```

DRAFT

DRAFT



One Socket Protocol ICD

This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

```
UINT32 GpsPosE;  
INT16 DrHdRte;  
UINT16 DrHdRteE;  
UINT16 DrHd;  
UINT16 DrHdE;  
UINT16 DrSpd;  
UINT16 DrSpdE;  
UINT32 DrPosE;  
UINT8 Reserved[2];  
} MI_NAV_SUBSYS;
```

6.37.6 Msg-ID 0x30;Sub-ID 0x05 (SID_DrValid)

MSG ID:

Number: 0x30
Name: MID_DrOut

SUB ID:

Number: 0x05
Name: SID_DrValid
Purpose: Preserved DR Data Validity Output Message (RESERVED)

Message Length:


10 bytes

Rate:

Typically output at startup

DRAFT

DRAFT

 SiRF A CSR plc Company	One Socket Protocol ICD
	Revision 5.5 11/16/2009

This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Binary Message Definition:

Byte #	Field	Data Type	Bytes	Units	Range	Res
1	Message ID	UINT8	1	n/a	0x30	n/a
2	Sub-ID	UINT8	1	n/a	0x05	n/a
3-6	Valid ¹²	UINT32	4	bitmap	¹³ bit 0: invalid position bit 1: invalid position error bit 2: invalid heading bit 3: invalid heading error bit 4: invalid speed scale factor bit 5: invalid speed scale factor error bit 6: invalid gyro bias bit 7: invalid gyro bias error bit 8: invalid gyro scale factor bit 9: invalid gyro scale factor error bit 10: invalid baseline speed scale factor bit 11: invalid baseline gyro bias bit 12: invalid baseline gyro scale factor bit 13 - 31: reserved	n/a
7-10	Reserved	UINT32	4	n/a	n/a	n/a

API:

```
typedef struct  
{  
    UINT32 Valid;  
    UINT32 Reserved;  
} MI_DR_VALID;
```

¹² The bit map of the Field variable reports the status. If all the bits in the bit map are zero (0), then the status of the variable = Valid. Otherwise, if any of the bits in the bit map are set = 1, then the status of the variable = Not Valid, and the individual bits give the reason why.

¹³ The individual bits are referenced by their offset from the start of the bit map, starting with offset 0 for the LSB of the Least-Significant byte.

CS-129291-DC2	© SiRF Technology, Inc., a member of the CSR plc group of companies 2009 This material is subject to SiRF's non-disclosure agreement.	Page 207 of 251
---------------	--	-----------------

DRAFT

DRAFT



One Socket Protocol ICD

This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

6.37.7 Msg-ID 0x30;Sub-ID 0x06 (SID_GyrFactCal)

MSG ID:

Number: 0x30
Name: MID_DrOut

SUB ID:

Number: 0x06
Name: SID_GyrFactCal
Purpose: Gyro Factory Calibration Response Output Message

Message Length:

4 bytes

Rate:

Output after successful completion of each calibration stage; can be polled

Binary Message Definition:

Byte #	Field	Data Type	Bytes	Units	Range	Res
1	Message ID	UINT8	1	N/A	0x30	N/A
2	Sub-ID	UINT8	1	N/A	0x06	N/A
3	Gyro Factory Calibration Progress (Note 1)	Bit Map	1	N/A	bit 0 = 1: Gyro Bias calibration completed bit 0 = 2: Gyro Scale Factor calibration completed ¹⁴ bits 3-7: Reserved (Note 2)	N/A
4	Reserved		1	N/A	N/A	N/A

Note 1: The bit map of the Field variable reports the status of each calibration stage. All pertinent bits must be set to Valid before the calibration is considered successful.

Note 2: The individual bits are referenced by their offset from the start of the bit map, starting with offset 0 for the LSB of the Least-Significant byte.

API:

```
typedef struct  
{  
    UINT8 Cal;  
    UINT8 Reserved;  
} MI_GYR_FACT_CAL;
```

¹⁴ Bit 0 can't equal 2??

DRAFT

DRAFT



One Socket Protocol ICD

This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

6.37.8 Msg-ID 0x30;Sub-ID 0x07 (SID_DrSensParam)

MSG ID:

Number: 0x30
Name: MID_DrOut

SUB ID:

Number: 0x07
Name: SID_DrSensParam
Purpose: Output message of Sensor Package parameters

Message Length:

7 bytes

Rate:

Input

Binary Message Definition:

Byte #	Field	Data Type	Bytes	Units	Range	Res
1	Message ID	UINT8	1	n/a	0xAC	n/a
2	Sub-ID	UINT8	1	n/a	0x07	n/a
3	Baseline Speed Scale Factor	UINT8	1	ticks/m	1 to 255 (default:4)	1
4-5	Baseline Gyro Bias	UNIT16	2	zero rate Volts	2.0 to 3.0 (default:2.5)	.0001
6-7	Baseline Gyro Scale Factor	UINT16	2	mV / (deg/sec)	1 to 65 (default: 22)	.001

API:

```
typedef struct
{
    UINT8 BaseSsf; /* in ticks/m */
    UINT16 BaseGb; /* in zero rate volts */
    UINT16 BaseGsf; /* in mV / (deg/s) */
} MI_DR_SENS_PARAM;
```

DRAFT

DRAFT

 <p>SiRF A CSR plc Company</p>	<p>One Socket Protocol ICD</p> <div style="border: 2px solid red; padding: 5px; color: red; font-weight: bold;"> This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control. </div>	<p>Revision 5.5 11/16/2009</p>
--	---	------------------------------------

6.37.9 Msg-ID 0x30;Sub-ID 0x08 (SID_DrDataBlk)

MSG ID:

Number: 0x30
Name: MID_DrOut

SUB ID:

Number: 0x08
Name: SID_DrDataBlk
Purpose: DR Data Block Output Message

Message Length:

86 bytes

Rate:

Output at 1 Hz

Binary Message Definition:

Byte #	Field	Data Type	Bytes	Units	Range	Res
1	Message ID	UINT8	1	N/A	0x30	N/A
2	Sub-ID	UINT8	1	N/A	0x08	N/A
3	Measurement Type (Note 3)	UINT8	1	N/A	<i>if = 0, Gyro and Odometer; if = 1, Differential Odometer;(RESERVED) if = 2, Compass and Odometer;(RESERVED)</i>	1
4	Valid measurements in block	UINT8	1	N/A	<i>1 to 10</i>	1
5-6	Backup Flags	UINT16	2	N/A	<i>bits 0 – 9: if set = 1: Backup = True if set = 0: Backup = False (Note 4)</i>	1
7 + (n-1)*8 (Note 1)	TimeTag	UINT32	4	msec	<i>0 to 4294967295</i>	1
11 + (n-1)*8 (Note 1)	DR Speed 1	UINT16	2	m/sec	<i>0 to 655</i>	.01
13 + (n-1)*8 (Note 1)	Gyro Heading Rate <i>or</i> DR Speed 2 (RESERVED) <i>or</i> Magnetic Compass Heading (RESERVED) (Note 3)	INT16 <i>or</i> UINT16 (RESERVED) <i>or</i> UINT16 (RESERVED)	2	deg /sec <i>or</i> m/sec (RESERVED) <i>or</i> deg (RESERVED)	<i>-300 to 300 or 0 to 655 (RESERVED) or 0 to 360 (RESERVED)</i>	.01 <i>or</i> .01 (RESERVED) <i>or</i> .01 (RESERVED)

DRAFT

DRAFT



One Socket Protocol ICD

This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

Note 1: n = valid measurement sets in the block.

Note 2: DR data validity is checked at 10 Hz, and if a particular data set contains invalid data, then the data is not outputted.

Note 3: The type of data in the second DR measurement in each set is controlled by the Measurement Type value.

Note 4: The bits index points to the corresponding data set; where the data set index goes from 0 to 9.

API:

```
typedef struct
{
    UINT32 Tag;
    UINT16 Data1;
    INT16 Data2;
} MI_DR_10HZ;
```

```
typedef struct
{
    UINT8 MeasType;
    UINT8 ValidCnt;
    UINT16 BkupFlgs;
    MI_DR_10HZ Blk[10];
} MI_DR_DATA_BLK;
```

6.37.10 Msg-ID 0x30;Sub-ID 0x09 (SID_GenericSensorParam)

MSG ID:

Number: 0x30
Name: MID_DrOut

SUB ID:

Number: 0x09
Name: SID_GenericSensorParam
Purpose: Output message of Sensor Package parameters

Message Length:

30 bytes


Rate:

The user can enable a one time transmission of this message via SirfDemo's Poll command for SirfDrive. In the "SirfDrive" menu item select the "Poll Sensor's Parameters" shown below:

DRAFT

DRAFT

 <p>SiRF A CSR plc Company</p>	<h2>One Socket Protocol ICD</h2> <div style="border: 2px solid red; padding: 5px; margin: 10px auto; width: fit-content;"> <p>This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control.</p> </div>	<p>Revision 5.5 11/16/2009</p>
---	---	------------------------------------

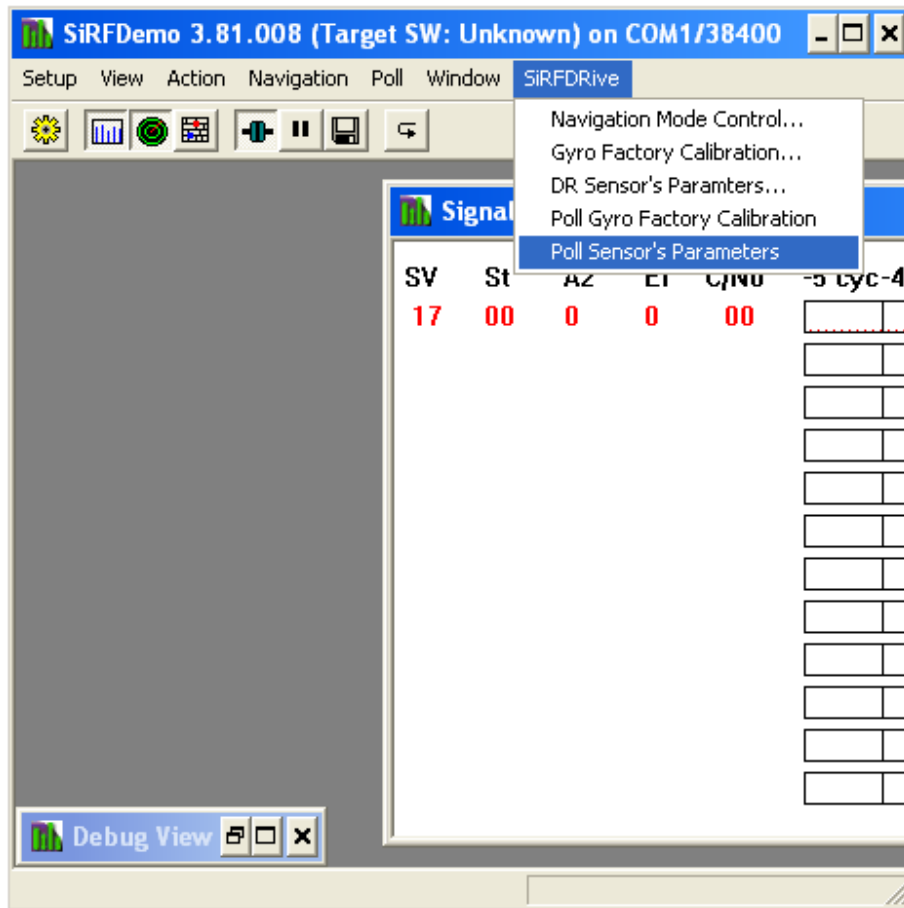

Binary Message Definition:

Byte #	Field	Data Type	Bytes	Units	Range	Res
1	Message ID	UINT8	1	N/A	0x30	N/A
2	Sub-ID	UINT8	1	N/A	0x09	N/A
3	Sensors[0].SensorType	UINT8	1	N/A	GYRO_SENSOR = 0x1 ACCELERATION_SENSOR = 0x2	N/A
4 – 5	Sensors[0].ZeroRateVolts	UINT16	2	volts	0 to 5.0 ¹⁵	0.0001
6 – 7	Sensors[0].MilliVoltsPer	UINT16	2	millivolts	0 to 1000 ¹⁶	0.0001
8 – 9	Sensors[0].ReferenceVoltage	UINT16	2	volts	0 to 5.0	0.0001

¹⁵ To restore ROM defaults for ALL sensors enter the value 0xdeadabba here. You must still include the remainder of the message but these values will be ignored.

¹⁶ For gyro this is millivolts per degree per second. For the acceleration sensor it is millivolts per metre per second²

DRAFT

DRAFT



One Socket Protocol ICD

This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

10	Sensors[1].SensorType	UINT8	1	N/A	GYRO_SENSOR = 0x1 ACCELERATION_SENSOR = 0x2	N/A
11 – 12	Sensors[1].ZeroRateVolts	UINT16	2	volts	0 to 5.0	0.0001
13 – 14	Sensors[1].MilliVoltsPer	UINT16	2	millivolts	0 to 1000	0.0001
15 – 16	Sensors[1].ReferenceVoltage	UINT16	2	volts	0 to 5.0	0.0001
17	Sensors[2].SensorType	UINT8	1	N/A	GYRO_SENSOR = 0x1 ACCELERATION_SENSOR = 0x2	N/A
18 – 19	Sensors[2].ZeroRateVolts	UINT16	2	volts	0 to 5.0	0.0001
20 – 21	Sensors[2].MilliVoltsPer	UINT16	2	millivolts	0 to 1000	0.0001
22 – 23	Sensors[2].ReferenceVoltage	UINT16	2	volts	0 to 5.0	0.0001
24	Sensors[3].SensorType	UINT8	1	N/A	GYRO_SENSOR = 0x1 ACCELERATION_SENSOR = 0x2	N/A
25 – 26	Sensors[3].ZeroRateVolts	UINT16	2	volts	0 to 5.0	0.0001
27 – 28	Sensors[3].MilliVoltsPer	UINT16	2	millivolts	0 to 1000	0.0001
29 – 30	Sensors[3].ReferenceVoltage	UINT16	2	volts	0 to 5.0	0.0001

API:

```
#define MAX_NUMBER_OF_SENSORS 0x4

typedef struct
{
    UINT8      SensorType;
    UINT32     ZeroRateVolts;
    UINT32     MilliVoltsPer
    UINT32     ReferenceVoltage;
}MI_SensorDescriptionType;

typedef struct
{
    MI_SensorDescriptionType Sensors[MAX_NUMBER_OF_SENSORS];
} MI_DR_SENS_PARAM;
```

6.37.11 Msg-ID 0x30;Sub-ID 0x0A (SID_GenericRawOutput)

MSG ID:

Number: 0x30
Name: MID_DrOut

CS-129291-DC2	© SiRF Technology, Inc., a member of the CSR plc group of companies 2009 This material is subject to SiRF's non-disclosure agreement.	Page 213 of 251
---------------	--	-----------------

DRAFT

DRAFT



One Socket Protocol ICD

This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

SUB ID:

Number: 0x0A
Name: SID_GenericRawOutput
Purpose: Output raw data from generic sensors

Message Length:

152 bytes @ 1Hz or 16bytes @ 10Hz

Rate:

152 bytes @ 1Hz or 16 bytes @ 10Hz

Binary Message Definition:

Byte #	Field	Data Type	Bytes	Units	Range	Res
1	Message ID	UINT8	1	n/a	0x30	n/a
2	Sub-ID	UINT8	1	N/A	0x0A	N/A
3-6	[0].CurrentTime	UINT32	4	milliseconds	0 to 0xffffffff	n/a
7-8	[0].AdcAvg[0]	UINT16	2	raw count	0 to 0xffff	n/a
9-10	[0].AdcAvg[1]	UINT16	2	raw count	0 to 0xffff	n/a
11-12	[0].AdcAvg[2]	UINT16	2	raw count	0 to 0xffff	n/a
13-14	[0].AdcAvg[3]	UINT16	2	raw count	0 to 0xffff	n/a
15-16	[0].OdoCount	UINT16	2	raw count	0 to 0xffff	n/a
17	[0].GPIOStat	UINT8	1	n/a	0 to 0xff	n/a
18-21	[1].CurrentTime	UINT32	4	milliseconds	0 to 0xffffffff	n/a
22-23	[1].AdcAvg[0]	UINT16	2	raw count	0 to 0xffff	n/a
24-25	[1].AdcAvg[1]	UINT16	2	raw count	0 to 0xffff	n/a
26-27	[1].AdcAvg[2]	UINT16	2	raw count	0 to 0xffff	n/a
28-29	[1].AdcAvg[3]	UINT16	2	raw count	0 to 0xffff	n/a
30-31	[1].OdoCount	UINT16	2	raw count	0 to 0xffff	n/a
32	[1].GPIOStat	UINT8	1	n/a	0 to 0xff	n/a
33-36	[2].CurrentTime	UINT32	4	milliseconds	0 to 0xffffffff	n/a
37-38	[2].AdcAvg[0]	UINT16	2	raw count	0 to 0xffff	n/a
39-40	[2].AdcAvg[1]	UINT16	2	raw count	0 to 0xffff	n/a
41-42	[2].AdcAvg[2]	UINT16	2	raw count	0 to 0xffff	n/a
43-44	[2].AdcAvg[3]	UINT16	2	raw count	0 to 0xffff	n/a
45-46	[2].OdoCount	UINT16	2	raw count	0 to 0xffff	n/a
47	[2].GPIOStat	UINT8	1	n/a	0 to 0xff	n/a
48-51	[3].CurrentTime	UINT32	4	milliseconds	0 to 0xffffffff	n/a
52-53	[3].AdcAvg[0]	UINT16	2	raw count	0 to 0xffff	n/a
54-55	[3].AdcAvg[1]	UINT16	2	raw count	0 to 0xffff	n/a
56-57	[3].AdcAvg[2]	UINT16	2	raw count	0 to 0xffff	n/a
58-59	[3].AdcAvg[3]	UINT16	2	raw count	0 to 0xffff	n/a
60-61	[3].OdoCount	UINT16	2	raw count	0 to 0xffff	n/a
62	[3].GPIOStat	UINT8	1	n/a	0 to 0xff	n/a
63-66	[4].CurrentTime	UINT32	4	milliseconds	0 to 0xffffffff	n/a

DRAFT


DRAFT

 <p>SiRF A CSR plc Company</p>	<h2>One Socket Protocol ICD</h2> <div style="border: 2px solid red; padding: 5px; display: inline-block; margin: 10px 0;"> <p>This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control.</p> </div> <p>Revision 5.5 11/16/2009</p>
--	--

67 – 68	[4].AdcAvg[0]	UINT16	2	raw count	0 to 0xffff	n/a
69 – 70	[4].AdcAvg[1]	UINT16	2	raw count	0 to 0xffff	n/a
71 – 72	[4].AdcAvg[2]	UINT16	2	raw count	0 to 0xffff	n/a
73 – 74	[4].AdcAvg[3]	UINT16	2	raw count	0 to 0xffff	n/a
75 – 76	[4].OdoCount	UINT16	2	raw count	0 to 0xffff	n/a
77	[4].GPIOStat	UINT8	1	n/a	0 to 0xff	n/a
78 – 81	[5].CurrentTime	UINT32	4	milliseconds	0 to 0xffffffff	n/a
82 – 83	[5].AdcAvg[0]	UINT16	2	raw count	0 to 0xffff	n/a
84 – 85	[5].AdcAvg[1]	UINT16	2	raw count	0 to 0xffff	n/a
86 – 87	[5].AdcAvg[2]	UINT16	2	raw count	0 to 0xffff	n/a
88 – 89	[5].AdcAvg[3]	UINT16	2	raw count	0 to 0xffff	n/a
90 – 91	[5].OdoCount	UINT16	2	raw count	0 to 0xffff	n/a
92	[5].GPIOStat	UINT8	1	n/a	0 to 0xff	n/a
93 – 96	[6].CurrentTime	UINT32	4	milliseconds	0 to 0xffffffff	n/a
97 – 98	[6].AdcAvg[0]	UINT16	2	raw count	0 to 0xffff	n/a
99 – 100	[6].AdcAvg[1]	UINT16	2	raw count	0 to 0xffff	n/a
101 – 102	[6].AdcAvg[2]	UINT16	2	raw count	0 to 0xffff	n/a
103 – 104	[6].AdcAvg[3]	UINT16	2	raw count	0 to 0xffff	n/a
105 – 106	[6].OdoCount	UINT16	2	raw count	0 to 0xffff	n/a
107	[6].GPIOStat	UINT8	1	n/a	0 to 0xff	n/a
108 – 111	[7].CurrentTime	UINT32	4	milliseconds	0 to 0xffffffff	n/a
112 – 113	[7].AdcAvg[0]	UINT16	2	raw count	0 to 0xffff	n/a
114 – 115	[7].AdcAvg[1]	UINT16	2	raw count	0 to 0xffff	n/a
116 – 117	[7].AdcAvg[2]	UINT16	2	raw count	0 to 0xffff	n/a
118 – 119	[7].AdcAvg[3]	UINT16	2	raw count	0 to 0xffff	n/a
120 – 121	[7].OdoCount	UINT16	2	raw count	0 to 0xffff	n/a
122	[7].GPIOStat	UINT8	1	n/a	0 to 0xff	n/a
123 – 126	[8].CurrentTime	UINT32	4	milliseconds	0 to 0xffffffff	n/a
127 – 128	[8].AdcAvg[0]	UINT16	2	raw count	0 to 0xffff	n/a
129 – 130	[8].AdcAvg[1]	UINT16	2	raw count	0 to 0xffff	n/a
131 – 132	[8].AdcAvg[2]	UINT16	2	raw count	0 to 0xffff	n/a
133 – 134	[8].AdcAvg[3]	UINT16	2	raw count	0 to 0xffff	n/a
135 – 136	[8].OdoCount	UINT16	2	raw count	0 to 0xffff	n/a
137	[8].GPIOStat	UINT8	1	n/a	0 to 0xff	n/a
138 – 141	[9].CurrentTime	UINT32	4	milliseconds	0 to 0xffffffff	n/a

DRAFT

DRAFT

 SiRF A CSR plc Company	One Socket Protocol ICD				
	This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control.				

142-143	[9].AdcAvg[0]	UINT16	2	raw count	0 to 0xffff	n/a
144-145	[9].AdcAvg[1]	UINT16	2	raw count	0 to 0xffff	n/a
146-147	[9].AdcAvg[2]	UINT16	2	raw count	0 to 0xffff	n/a
148-149	[9].AdcAvg[3]	UINT16	2	raw count	0 to 0xffff	n/a
150-151	[9].OdoCount	UINT16	2	raw count	0 to 0xffff	n/a
152	[9].GPIOStat	UINT8	1	n/a	0 to 0xff	n/a

API:

```
#define NUM_OF_DR_RAW 10
#define MAX_NUMBER_OF_SENSORS 0x4
```

```
typedef struct
```

```
{
    UINT32 currentTime;
    UINT16 adcAvg[MAX_NUMBER_OF_SENSORS];
    UINT16 odoCount;
    UINT8 gpioStat;
} tADCOdometer;
```

```
typedef struct
```

```
{
    struct
    {
        tADCOdometer ADCOdometer[NUM_OF_DR_RAW];
    } DrRaw;
} tDrRawData, *tDrRawDataPtr;
```

DRAFT

DRAFT

 SiRF A CSR plc Company	One Socket Protocol ICD <div style="border: 2px solid red; padding: 5px; display: inline-block; color: red; font-weight: bold;">This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control.</div> Revision 5.5 11/16/2009
--	---

6.37.12 Msg-ID 0x30;Sub-ID 0x50 (SID_MMFStatus)

MSG ID:

Number: 0x30
Name: MID_DrOut

SUB ID:

Number: 0x50
Name: SID_MMFStatus
Purpose: Map Matching Feedback State Output Message

Message Length:

42 bytes

Rate:

Output at 1 Hz

Binary Message Definition:

Byte #	Field	Data Type	Bytes	Units	Range	Res
1	Message ID	UINT8	1	N/A	0x30	N/A
2	Sub-ID	UINT8	1	N/A	0x50	N/A
3 -6	MMF_Status	UINT32	4	bitmap	See "MMF_Status Bit Description" below	0
7 -8	Heading	UINT16	2	deg	0 to 360	.01
9 -12	Latitude	INT32	4	deg	-90 to 90	10 ⁻⁷
13 -16	Longitude	INT32	4	deg	-180 to 180	10 ⁻⁷
17 -20	Altitude	INT32	4	metre	-2000 to 120000	0.1
21-24	TOW	UINT32	4	sec	0 to 604800.000	0.001
25-26	MMF_Heading	UINT16	2	deg	0 to 360	.01
27-30	MMF_Latitude	INT32	4	deg	-90 to 90	10 ⁻⁷
31-34	MMF_Longitude	INT32	4	deg	-180 to 180	10 ⁻⁷
35-38	MMF_Altitude	INT32	4	metre	-2000 to 120000	0.1
39-42	MMF_TOW	UINT32	4	sec	0 to 604800.000	0.001

MMF_Status Bit Description:

This represents what the MMF_Status **was** for the last received MMF packet.

Assuming Bit 0 is the Least Significant Bit:

Bit #	Name	Description
31	MMF_STATUS_MMF_ENABLED_MASK	Map matching is enabled

CS-129291-DC2	© SiRF Technology, Inc., a member of the CSR plc group of companies 2009 This material is subject to SiRF's non-disclosure agreement.	Page 217 of 251
---------------	--	-----------------

DRAFT

DRAFT



One Socket Protocol ICD

This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

30	MMF_STATUS_MMF_CALIBRATION_ENABLED_MASK	Map matching calibration is enabled
29	MMF_STATUS_MMF_RETROLOOP_ENABLED_MASK	Map matching retroloop is enabled
28	MMF_STATUS_GOT_DATA_MASK	Received a MMF packet
27	MMF_STATUS_SYSTEM_ALTITUDE_VALID_MASK	Altitude updated with MMF data
26	MMF_STATUS_SYSTEM_HEADING_VALID_MASK	Heading updated with MMF data
25	MMF_STATUS_SYSTEM_POSITION_VALID_MASK	Position updated with MMF data
24	MMF_STATUS_INVALID_DATA_SIZE_MASK	Incorrect number of data sets inside MMF packet
23	MMF_STATUS_HEADING_OUT_OF_RANGE_MASK	Hdg must 0 to 360 degrees
22	MMF_STATUS_POSITION_DRIFT_MASK	MMF solution failed position drift logic
21	MMF_STATUS_DATA_OVERFLOW_MASK	New MMF packet arrived before prior one used
20	MMF_STATUS_DATA_TOO_OLD_MASK	MMF Data was too old for processing
19	MMF_STATUS_NAV_UPDATED_MASK	Nav was updated with MMF feedback
18	MMF_STATUS_NAV_VALID_MASK	Nav is valid
17	MMF_MI_MALFORMED_INPUT_DATA_MASK	MI_MMF_InputData() found error in data
16	MMF_STATUS_HEADING_ERROR_RATE_TOO_BIG_MASK	MMF packet failed Heading Error logic
15	MMF_STATUS_HEADING_TURN_RATE_TOO_BIG_MASK	MMF packet failed Heading Rate logic
14	MMF_STATUS_SPEED_TOO_LOW_MASK	MMF packet failed Speed logic
13	undefined	Reserved
to		
8		
7	MMF_BITMAP_RESERVED_TWO_MASK	Copy of MMF packet bitmap register
6	MMF_BITMAP_RESERVED_ONE_MASK	Copy of MMF packet bitmap register
5	MMF_BITMAP_ALTITUDE_VALID_MASK	Copy of MMF packet bitmap register
4	MMF_BITMAP_HEADING_VALID_MASK	Copy of MMF packet bitmap register
3	MMF_BITMAP_POSITION_VALID_MASK	Copy of MMF packet bitmap register
2	MMF_BITMAP_ALTITUDE_FORCED_MASK	Copy of MMF packet bitmap register
1	MMF_BITMAP_HEADING_FORCED_MASK	Copy of MMF packet bitmap register
0	MMF_BITMAP_POSITION_FORCED_MASK	Copy of MMF packet bitmap register

API:

```
typedef struct
{
    UINT32    MMF_Status17;
    UINT16    Heading;
    INT32     Latitude;
    INT32     Longitude;
    INT32     Altitude;
    UINT32    TOW;
    UINT16    MMF_Heading;
    INT32     MMF_Latitude;
    INT32     MMF_Longitude;
    INT32     MMF_Altitude;
    UINT32    MMF_TOW;
} MI_MMF_State_Type;
```

6.37.13 Msg-ID 0x30;Sub-ID 0x64 (SID_GSA)

MSG ID:

Number: 0x30
Name: MID_DrOut

¹⁷ See "MMF_Status Bit Description" above

DRAFT

DRAFT



One Socket Protocol ICD

This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

SUB ID:

Number: 0x64
Name: SID_GSA
Purpose: Sirf Binary equivalent of NMEA GSA message.

Message Length:

32 bytes

Rate:

Output when Nav is complete.

Binary Message Definition:

Byte #	Field	Data Type	Bytes	Units	Range	Res
1	Message ID	UINT8	1	integer	0x30	1
2	Sub-ID	UINT8	1	integer	0x64	1
3	mode1	UINT8	1	integer	1 = Manual-forced to operate in 2D or 3D mode 2 = 2D Automatic- allowed to automatically switch 2D/3D	1
4	mode2	UINT8	1	integer	1 = Fix not available 2 = 2D(<4 SVs used) 3 = 3D(> 3 SVs used)	1
5-8	satellite_used_0_31	UINT32	4	bitmap	Bit 0 = SV 0 Bit 1 = SV 1 Bit 31 = SV 31 If bit is set to 1 then SV was used in solution.	1
9-12	satellite_used_32_63	UINT32	4	bitmap	Bit 0 = SV 32 Bit 1 = SV 33 Bit 31 = SV 63 If bit is set to 1 then SV was used in solution.	1
13-16	GDOP	FLOAT32	4	metre	Geometric Dilution of Precision	1
17-20	HDOP	FLOAT32	4	metre	Horizontal Dilution of Precision	1
21-24	PDOP	FLOAT32	4	metre	Position Dilution of Precision	1
25-28	TDOP	FLOAT32	4	metre	Time Dilution of Precision	1
29-32	VDOP	FLOAT32	4	metre	Vertical Dilution of Precision	1

API:

```
typedef struct  
{  
  
    UINT32  satellite_used_0_31;  
    UINT32  satellite_used_32_63;  
    FLOAT32 GDOP;  
    FLOAT32 HDOP;  
    FLOAT32 PDOP;  
}
```

DRAFT

DRAFT



One Socket Protocol ICD

This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

```
FLOAT32 TDOP;  
FLOAT32 VDOP;  
UINT8 mode1;  
UINT8 mode2;  
  
} MI_GSA;
```

6.37.14 Msg-ID 0x30;Sub-ID 0x65 (SID_DR_NVM)

MSG ID:

Number: 0x30
Name: MID_DrOut

SUB ID:

Number: 0x65
Name: SID_DR_NVM
Purpose: Output contents of Sirfdrive NVM at boot. Used to seed offline test runs.

Message Length:

167 bytes

Rate:

Output once at start.

CSR Confidential - Not for external distribution

DRAFT



This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.0
9/25/2009

Binary Message Definition:

Byte #	Field	Data Type	Bytes	Units	Range	Res
1	Message ID	UINT8	1	N/A	0x30	1
2	Sub-ID	UINT8	1	N/A	0x65	1
3-4	SeqNum	INT16	2	integer	2 to 32767	1
5-6	OkAcrossReset	BOOL16	2	boolean	0 = false, 1 = true	1
7-10	DRHeading	FLOAT32	4	degrees	0.0 to 360.0	1
11-14	DRHeadingError	FLOAT32	4	degrees	0.0 to 360.0	1
15-18	DRSpeedError	FLOAT32	4	m/sec	0.0 to 600.0 ¹⁸	1
19-22	DRPositionError	FLOAT32	4	metres	0.0 to 6.0e6f	1
23-26	SpeedSf	FLOAT32	4	dimensionless	+/- full res	1
27-30	OdoSpeedSf	FLOAT32	4	dimensionless	+/- full res	1
31-34	HeadingRateBias	FLOAT32	4	deg/sec	+/- full res	1
35-38	HeadingRateSf	FLOAT32	4	dimensionless	+/- full res	1
39-46	HeadingRateSf_SD	DOUBLE64	8	dimensionless	0.0 to +full res	1
47-50	LFSpeedSF	FLOAT32	4	dimensionless	+/- full res	1
51-54	RFSpeedSF	FLOAT32	4	dimensionless	+/- full res	1
55-58	LRSpeedSF	FLOAT32	4	dimensionless	+/- full res	1
59-62	RRSpeedSF	FLOAT32	4	dimensionless	+/- full res	1
63-66	AxleLength	FLOAT32	4	metres	0.0 to 10.0	1
67-70	AxleSep	FLOAT32	4	metres	0.0 to 50.0	1
71-74	AntennaDist	FLOAT32	4	metres	+/- 50.0	1
75-76	FirstHRSFDone	BOOL16	2	boolean	0 = false, 1 = true	1
77-78	DiffWheelSpdCalOK	BOOL16	2	boolean	0 = false, 1 = true	1

¹⁸ COCOM speed limit



This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.0
9/25/2009

79-80	LFSpeedSFCalOk	BOOL16	2	boolean	0 = false, 1 = true	1
81-82	RFSpeedSFCalOk	BOOL16	2	boolean	0 = false, 1 = true	1
83-84	LRSpeedSFCalOk	BOOL16	2	boolean	0 = false, 1 = true	1
85-86	RRSpeedSFCalOk	BOOL16	2	boolean	0 = false, 1 = true	1
87-88	DrNavControl	INT16	2	bitmap	0x1 = GPS_ONLY_REQUIRED 0x2=DR_NAV_WITH_STORED_CAL_OK 0x4 = DR_NAV_REQUIRES_GPS_CAL 0x8 = DR_NAV_ONLY_REQUIRED	1
89-96	RawLonAccel	DOUBLE64	8	m/sec^2	+/- 50.0	1
97-104	RawLatAccel	DOUBLE64	8	m/sec^2	+/- 50.0	1
105-112	RawUpAccel	DOUBLE64	8	m/sec^2	+/- 50.0	1
113-120	YawAngle_rads	DOUBLE64	8	radians	0.0 to (2.0 * PI) ??	10 ⁻⁷
121-128	YawAngleSD_rads	DOUBLE64	8	radians	0.0 to (2.0 * PI)??	10 ⁻⁷
129-136	PitchAngle_rads	DOUBLE64	8	radians	0.0 to (2.0 * PI)??	10 ⁻⁷
137-144	RollAngle_rads	DOUBLE64	8	radians	0.0 to (2.0 * PI)??	10 ⁻⁷
145-146	Sensor2YawedDone	BOOL16	2	boolean	0 = false, 1 = true	1
147-148	YawAngleComputed	BOOL16	2	boolean	0 = false, 1 = true	1
149-150	UserResetWithData	BOOL16	2	boolean	1= User has issued Reset with Data for us to update DR with. 0= No data from user to update DR with.	1
151-152	ValidDrCal	BOOL16	2	boolean	0 = false, 1 = true	1
153 - 154	OdoSpeedSFCalOk	BOOL16	2	boolean	0 = false, 1 = true	1
155	SensorDataType	UINT8	1	Bus Type	0 = DIRECT_ODO_GYRO_REV 1= NETWORK_ODO_GYRO_REV 2= NETWORK_DIF_PULSES_REV 3=NETWORK_DIF_SPEEDS_REV 4=NETWORK_DIF_ANGLRT_REV 5=NETWORK_ODO_GYRO_NOREV 6 =NETWORK_DIF_PULSES_NOREV 7=NETWORK_DIF_SPEEDS_NOREV 8 =NETWORK_DIF_ANGLRT_NOREV	1



This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.0
9/25/2009

					9=NET_GYRO_ODO_STEER_ACCEL 12= NET_ONE_GYRO_THREE_ACCELS	
156-159	Checksum	UINT32	4	CRC code	0x0 to 0xFFFFFFFF	1
160-163	Reserved1	UINT32	4	Undefined	Internal use	1
164-167	Reserved2	UINT32	4	undefined	Internal use	1

CSR Confidential - Not for external distribution

DRAFT



One Socket Protocol ICD

This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

API:

```
typedef struct
{
  INT16   SeqNum;
  BOOL16  OkAcrossReset; // TRUE: DR data can be used after a RESET
                          // FALSE: DR data cannot be used after a RESET

  FLOAT32 DRHeading;      // deg
  FLOAT32 DRHeadingError; // deg, 1-sigma
  FLOAT32 DRSpeedError;   // m/sec, 1-sigma
  FLOAT32 DRPositionError; // meters, 1-sigma

  //
  // Odometer data
  //
  FLOAT32 SpeedSf;        // dimensionless
  FLOAT32 OdoSpeedSf;     // dimensionless

  //
  // Gyro Data
  //
  FLOAT32 HeadingRateBias; // deg/sec
  FLOAT32 HeadingRateSf;   // dimensionless
  DOUBLE64 HeadingRateSf_SD; // dimensionless

  //
  // Differential Wheel Speed Data
  //
  FLOAT32 LFSpeedSF; // Left Front Wheel Speed Scale Factor,
                    // dimensionless
  FLOAT32 RFSpeedSF; // Right Front Wheel Speed Scale Factor,
                    // dimensionless
  FLOAT32 LRSpeedSF; // Left Rear Wheel Speed Scale Factor,
                    // dimensionless
  FLOAT32 RRSpeedSF; // Right Rear Wheel Speed Scale Factor,
                    // dimensionless
  FLOAT32 AxleLength; // Length of rear axle, meters
  FLOAT32 AxleSep;    // Distance from rear to front axle, meters
                    // (positive forward)
  FLOAT32 AntennaDist; // Distance from rear axle to GPS antenna,
                    // meters (positive forward)

  BOOL16 FirstHRSFDone; // Indicates First Heading Rate Scale Factor
                        // estimate was done

  BOOL16 DiffWheelSpdCalOK; // Indicates whether DWS calibration has been
                        // successful

  BOOL16 LFSpeedSFCalOk; // Indicates whether individual speed has been
                        // calibrated
}
```

DRAFT

DRAFT



One Socket Protocol ICD

This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

```
BOOL16 RFSpeedSFCalOk; // Indicates whether individual speed has been
                        // calibrated
BOOL16 LRSpeedSFCalOk; // Indicates whether individual speed has been
                        // calibrated
BOOL16 RRSpeedSFCalOk; // Indicates whether individual speed has been
                        // calibrated

INT16 DrNavControl; // GPS Only, DR with Stored Cal, or DR with GPS Cal
DOUBLE64 RawLonAccel;
DOUBLE64 RawLatAccel;
DOUBLE64 RawUpAccel;

DOUBLE64 YawAngle_rads; // radians
DOUBLE64 YawAngleSD_rads; // radians

DOUBLE64 PitchAngle_rads; // radians
DOUBLE64 RollAngle_rads; // radians

BOOL16 Sensor2YawedDone;
BOOL16 YawAngleComputed;
BOOL16 UserResetWithData; //TRUE = User has issued Reset with Data
                        // for us to update DR with
                        //FALSE = No data from user to update DR
                        // with

BOOL16 ValidDrCal;
BOOL16 OdoSpeedSFCalOk;
UINT8 SensorDataType; //Need to remember Bus Type Across reset
UINT32 CheckSum;

} tDrRamData, *tDrRamDataPtr;
```

6.37.15 Msg-ID 0x41,Sub-ID 0x81 (MID_GPIO_State)

MSG ID:

Number: 0x41
Name: MID_DrIn

SUB ID:

Number: 0x81
Name: MID_GPIO_State

Message Length:

4 bytes

DRAFT

DRAFT



One Socket Protocol ICD

This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

Rate:

Output at 1Hz.

Binary Message Definition:

Byte #	Field	Data Type	Bytes	Units	Range	Res
1	Message ID	UINT8	1	n/a	0x41	1
2	Sub-ID	UINT8	1	n/a	0x81	1
3-4	gpio_state	UINT16	2	bitmap	Bit 0 is GPIO 0 Bit 1 is GPIO 1 .. Bit 15 is GPIO 15	1

API:

```
UINT16 gpio_state;
```

6.37.16 Msg-ID 0xAC;Sub-ID 0x09(SID_InputCarBusData)

MSG ID:

Number: 0xAC
Name: MID_DrIn

SUB ID:

Number: 0x09
Name: SID_InputCarBusData
Purpose: Output Car Bus Data to NAV

Message Length:

22 to 182 bytes

Rate:

Input at 1Hz

DRAFT

DRAFT



One Socket Protocol ICD

This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

Binary Message Definition:

Byte #	Field	Data Type	Bytes	Units	Range	Res
1	Message ID	UINT8	1	N/A	0xAC	N/A
2	Sub-ID	UINT8	1	N/A	0x09	N/A
3	Sensor Data Type (SDT)	UINT8	1	N/A	0-127 1: Gyro, Speed Data, and Reverse 2: 4 Wheel Pulses, and Reverse 3: 4 Wheel Speed, and Reverse 4: 4 Wheel Angular Speed, and Reverse 5: Gyro, Speed Data, NO Reverse 6: 4 Wheel Pulses, NO Reverse 7: 4 Wheel Speed, NO Reverse 8: 4 Wheel Angular Speed, NO Reverse 9: Gyro, Speed Data, Reverse, Steering Wheel Angle, Longitudinal Acceleration, Lateral Acceleration 10: Yaw Rate Gyro, Downward Acceleration (Z), Longitudinal Acceleration (X), Lateral Acceleration (Y) 10-127: Reserved	N/A
4	Number of Valid data sets	UINT8	1	N/A	0-11	N/A
5	Reverse Bit Map N/A for SDT = 10	UINT16	2	N/A	Bit-wise indication of REVERSE status corresponding to each sensor data set, i.e. bit 0 corresponds to the first data set, bit 1 corresponds to the second data set, etc.	N/A
7+(N-1)* 16 (see Note 1)	Valid Sensor Indication	UINT8	1	N/A	Valid/Not Valid indication for each one of the 4 possible sensor inputs in a individual data set; when a particular bit is set to 1 the corresponding data is Valid, when the bit is set to 0 the corresponding data is NOT valid. Bit 0 corresponds to Data Set Time Tag Bit 1 corresponds to Odometer Speed Bit 2 corresponds to Data 1 Bit 3 corresponds to Data 2 Bit 4 corresponds to Data 3 Bit 5 corresponds to Data 4 Bits 6-7 : Reserved	N/A
8+(N-1)* 16 (see Note 1)	Data Set Time Tag	UINT32	4	msec	0-4294967295	1
12+(N-1)*16 (see Note 1)	Odometer Speed (also known as VSS) N/A for SDT = 10	UINT16	2	m/sec	0 to 100	0.01

DRAFT

DRAFT



One Socket Protocol ICD

This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

14+(N-1)* 16 (see Note 1)	Data 1 (Depends on SDT)	INT16	2	(Depends on (SDT))	(Depends on (SDT))	(Depends on (SDT))
	SDT = 1,5, 9,10: Gyro Rate			Deg/sec	-120 to 120	0.01
	SDT = 2, 6: Right Front Wheel Pulses			N/A	4000	1
	SDT = 3, 7: Right Front Wheel Speed			m/sec	0 to 100	0.01
	SDT = 4, 8: Right Front Wheel Angular Speed			rad/sec	-327.67 to 327.67	0.01
16+(N-1)* 16 (see Note 1)	Data 2 (Depends on SDT)	INT16	2	(Depends on (SDT))	(Depends on (SDT))	(Depends on (SDT))
	SDT = 1: N/A			N/A	N/A	N/A
	SDT = 2, 6: Left Front Wheel Pulses			N/A	4000	1
	SDT = 3, 7: Left Front Wheel Speed			m/sec	0 to 100	0.01
	SDT = 4, 8: Left Front Wheel Angular Speed			rad/sec	-327.67 to 327.67	0.01
	SDT = 9: Steering Wheel Angle			deg	-720 to 720	0.05
	SDT = 10: Downwards Acceleration			m/sec ²	-15 to 15	0.001
18+(N-1)* 16 (see Note 1)	Data 3 (Depends on SDT)	INT16	2	(Depends on (SDT))	(Depends on (SDT))	(Depends on (SDT))
	SDT = 1: N/A			N/A	N/A	N/A
	SDT = 2, 6: Right Rear Wheel Pulses			N/A	4000	1
	SDT = 3, 7: Right Rear Wheel Speed			m/sec	0 to 100	0.01
	SDT = 4, 8: Right Rear Wheel Speed			rad/sec	-327.67 to 327.67	0.01
SDT = 9,10: Longitudinal Acceleration	m/sec ²	-15 to 15	0.001			
20+(N-1)* 16 (see Note 1)	Data 4 (Depends on SDT)	INT16	2	(Depends on (SDT))	(Depends on (SDT))	(Depends on (SDT))
	SDT = 1: N/A			N/A	N/A	N/A
	SDT = 2, 6: Left Rear Wheel Pulses			N/A	4000	1
	SDT = 3, 7: Left Rear Wheel Speed			m/sec	0 to 100	0.01
	SDT = 4, 8: Left Rear Wheel Speed			rad/sec	-327.67 to 327.67	0.01

DRAFT

DRAFT

 SiRF A CSR plc Company	One Socket Protocol ICD	
	This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control.	Revision 5.5 11/16/2009

	SDT = 9,10: Lateral Acceleration			m/sec ²	-15 to 15	0.001
22+(N-1)* 16 (see Note 1)	Reserved	UINT8	1	N/A	N/A	N/A
Note 1: N indicates the number of valid data sets in the message						

API:

```
typedef struct
{
    UINT8    ValidSensorIndication;
    UINT32   DataSetTimeTag;
    UINT16   OdometerSpeed;
    INT16    Data1;
    INT16    Data2;
    INT16    Data3;
    INT16    Data4;
    UINT8    Reserved;
} tCarSensorData;

typedef struct
{
    UINT8          SensorDataType;
    UINT8          NumValidDataSets;
    UINT16         ReverseBitMap;
    tCarSensorData CarSensorData[11];
} tCarBusData;
```

6.38 Measurement Engine Output Message

Table 246 : Measurement Engine Output Message

Message Name	MEAS_ENG_OUTPUT
Input or Output	Output
MID (Hex)	0x44
MID (Dec)	68
Message Name in Code	MID_MEAS_ENG_OUT
SID (Hex)	See below
SID (Dec)	See below
SID Name in Code	See below

This message wraps the content of another OSP message and outputs it to SiRFLive. The SID of this message equals to the MID of the message to be wrapped. The wrapped content includes the entire target message, comprising the start sequence, payload length, payload content, checksum and end sequence fields, as well.

DRAFT

DRAFT


 SiRF A CSR plc Company	One Socket Protocol ICD	
	This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control.	Revision 5.5 11/16/2009

Table 247: Measurement Engine Output SID Descriptions

SID		Description
Hex Value	Decimal Value	
0x04	4	MID_MeasuredTracker.
0xE1	225	MID_SiRFOutput
0xFF	255	MID_ASCIIData

Table 248: Message Fields Description

Name	Bytes	Binary (Hex)		Unit	ASCII (Dec)		Description
		Scale	Example		Scale	Example	
Message ID	U1						
Sub ID	U1		0xFF		255	The MID of the target message to be wrapped for output. The current value range is: 4, 225, 255.	
Target Message	Variable					This is the entire target message including the message header and trailer.	

6.39 Statistics Output Message

Table 249 : Statistics Output Message

Message Name	Statistics Output
Input or Output	Output
MID (Hex)	0xE1
MID (Dec)	225
Message Name in Code	MID_SiRFOutput
SID (Hex)	0x06
SID (Dec)	6
SID Name in Code	STATISTICS

This message generates quality of positioning data for collecting statistics. This message is sent once after system reset and it is fully documented in the SSB v2.4 manual document [3].

DRAFT



This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

7 Message Processing Procedures

7.1 General Overview

7.1.1 Overview of Message Flow

7.1.1.1 Typical Message Flow in Stand-Alone Mode

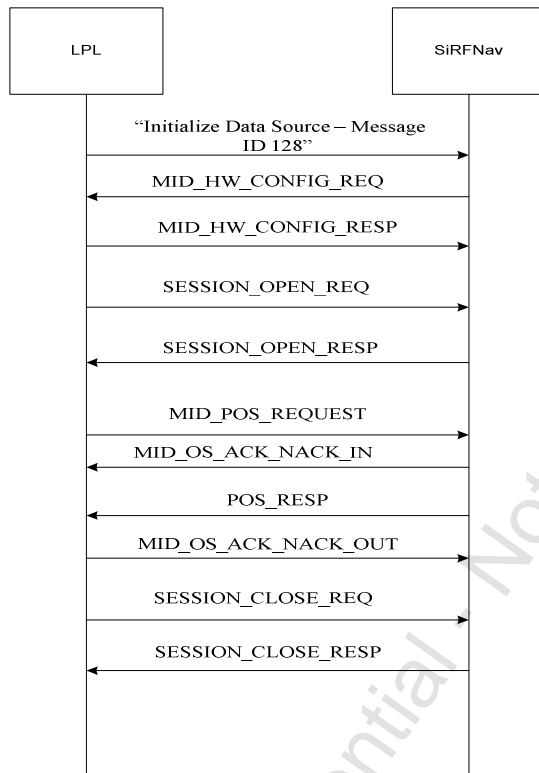


Figure 2 Example Stand-Alone Mode Message Flow

Figure 2 illustrates the message flow between a CP component, such as LPL and an SLC component, such as SiRFNav. This includes restarting the receiver with an “Initialize Data Source” message, exchanging HW configuration information, opening up a session, requesting position data and providing it, and finally, closing the session.

7.1.1.2 Typical Message Flow in Aided Mode

The overall message flow between CP and SLC interfaces during an aided GPS (AGPS) session is shown in Figure 3.



This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

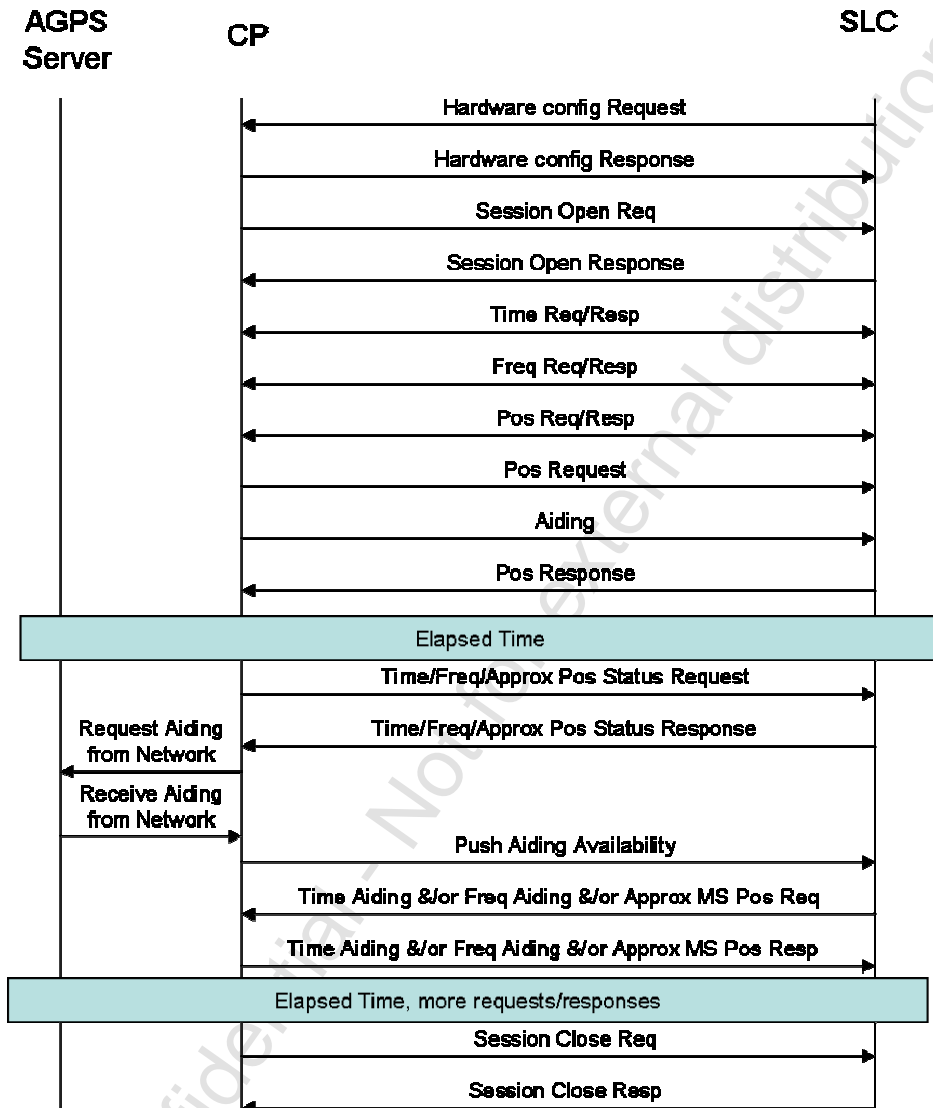


Figure 3 Example Aided GPS Message Flow

Similarly to the stand-alone mode, here a GPS session is also defined as the time between when the GPS receiver is started (e.g. power on) and when the GPS module is stopped (e.g. power off). A session is the time between “Session Open Request”/”Session Open Response” and “Session Close Request”/”Session Close Response”. Figure 3 illustrates an example flow diagram from setting the hardware configuration to closing the session.

Here, aiding is also part of the position request / response message transaction flow. In other scenarios, aiding can also be provided at any time while the session is open. For example, ephemeris can be pushed at any time while the session is open, even as the first step right after the session open is acknowledged. Several other, alternative procedures such as the push-mode aiding procedure, and the time/frequency/approximate position status procedure are described further below in this section. These two procedures provide the CP with more flexibility to give aiding to the SLC during a GPS session.



This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

7.1.1.3 Typical Low Power Operation

Figure 4. below has a typical message sequence described for low power modes.

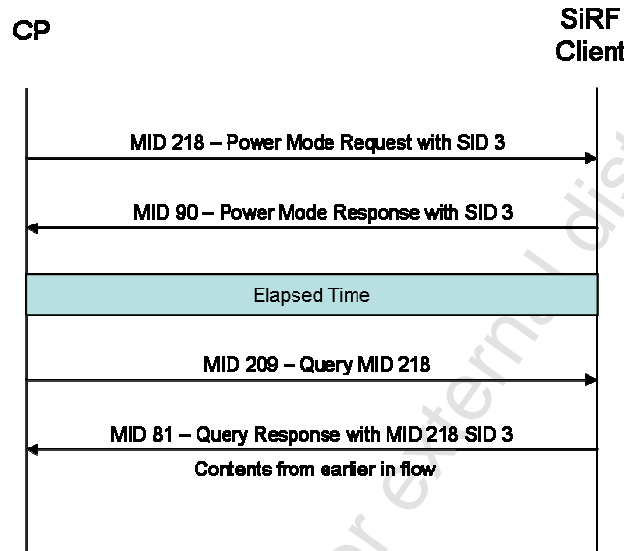


Figure 4. Typical low power messaging sequence

7.1.1.4 Push-Mode Aiding Procedure

Anytime after the first set of Time Transfer Request/Response, Frequency Transfer Request/Response, Approximate MS Position Request/Response (right after “Hardware Configuration Response”) and before power down, the CP may push aiding information on the F interface under the following conditions:

1. When the CP obtains improved aiding accuracy:
The CP shall start the push-mode aiding procedure when new information about the accuracy of aiding information changes from the previous accuracy. The push-mode aiding procedure is triggered by a “Push Aiding Availability” with appropriate “AIDING_AVAILABILITY_MASK” from the CP.

The SLC shall compare the information in “Push Aiding Availability” with the internal information, and request for the aiding information which is more accurate on the CP side (using “Time Transfer Request”, “Frequency Transfer Request”, or ‘MS Approximate Position Request”). If none of the newly available aiding is more accurate than the SLC’s internal state, the SLC may not request for aiding from the CP. Special note: The CP should only send this information when accuracy has improved significantly.

2. When the CP detects change of aiding source:
If the position or frequency aiding sources have changed (e.g. base-station handover, a new network is entered), the CP may initiate a “forced aiding request” push-mode aiding procedure by sending a “Push Aiding Availability” with the appropriate “FORCED_AIDING_REQ_MASK”. The SLC shall re-request aiding information indicated in the mask. If the SLC is not navigating, the SLC should use the new aiding information regardless of the uncertainty level of the new aiding. However, if SLC is navigating, the SLC will only use information which it currently does not have.

In terms of message handling:



This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

Immediately after the reception of the "Push Aiding Availability" message, the SLC shall return a "Push_ACK_NACK" message before comparing the information in the message with its internal accuracy status. The SLC shall set the message to ACK if the SLC receives and understands the message properly. The SLC shall set the message to NACK if the SLC cannot properly understand the message (e.g. wrong parameter fields).

7.1.1.5 Time/Frequency/Approximate Position Status Procedure

At anytime after the "Hardware Configuration Response", the CP may query the internal status of the time, frequency and position accuracy from the SLC by sending the message "Time_Frequency_ApproximatePosition Request". The CP shall request the accuracy it wishes to query by setting the REQ_MASK of the message.

After the SLC receives the "Time_Frequency_ApproximatePosition Request" message, the SLC shall immediately prepare the "Time_Frequency_ApproximatePosition Response" by filling the requested status (accordingly to REQ_MASK) with the current internal status. The STATUS_RESP_MASK in the response message shall match the REQ_MASK exactly. If a status is requested in the REQ_MASK, but the internal status is unknown, the SLC shall set the response status value(s) to "unknown", and keep the corresponding bit in STATUS_RESP_MASK as 1.

7.1.2 Message Organization

The Messages are organized by pairs of Request and Response (or Notification) messages. A Request Message can trigger the generation of a single or of a sequence of Response and/or Notification Messages. A requesting entity is allowed to have only one outstanding Request of a given type (specific MESS_ID) at any time. A Request is no longer outstanding as soon as any of the following events occurs:

- A Response or Notification of the corresponding type has been received.
- The elapsed time since the transmission of the request is larger than the current timeout value.

Every Response associated with a Request should be sent back to the requesting entity within the initial timeout delay. If the response did not arrive within the prescribed timeout delay to the requesting entity, the requesting entity can choose to send again the Request, or any other appropriate action.

If the requesting entity resends the same request, the timeout value will be doubled from the timeout value used during the previous attempt. At the end of the third attempt without any response received from the other end, no further attempt will be tried.

If the requested entity cannot send the response message within the timeout delay, it will retransmit a reject message instead.

No response message can be spontaneously sent without having previously received the associated Request for the other entity.

There are few exceptions to this general concept of associated Request/Responses pairs:

- Requests with no explicit response
Reset GPS Command: As soon as the SLC receives this message, it shall reset itself. After noting a reset has occurred, the CP sees the hardware config request from the SLC and sends a hardware configuration response. No message has to be sent in reply to the Reset GPS Command.
- Unsolicited Information messages (no request)
SLC Status message: SLC sends this message when one of the events described in the SLC Status event list has occurred. There is no obligation for the CP to act upon their reception.



This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

Error Notification message: SLC sends this message to inform the CP of an error occurrence part of the list predefined for the error notification list. There is no obligation for the CP to act upon their reception.

Illustrating such message organization, Figure 5 and Figure 6 show how the message request / response and notifications would detail a generic AGPS message flow depicted above in Figure 3.

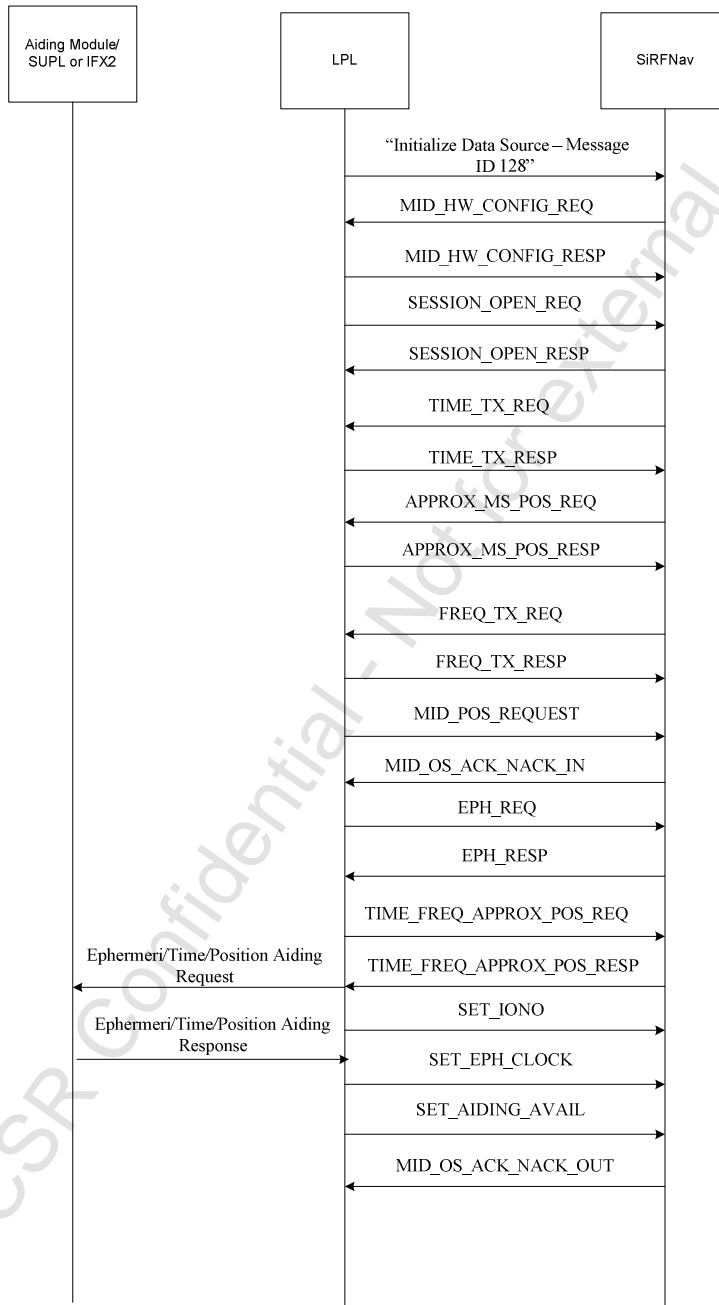


Figure 5. AGPS messaging sequence with response details. Session Part I.

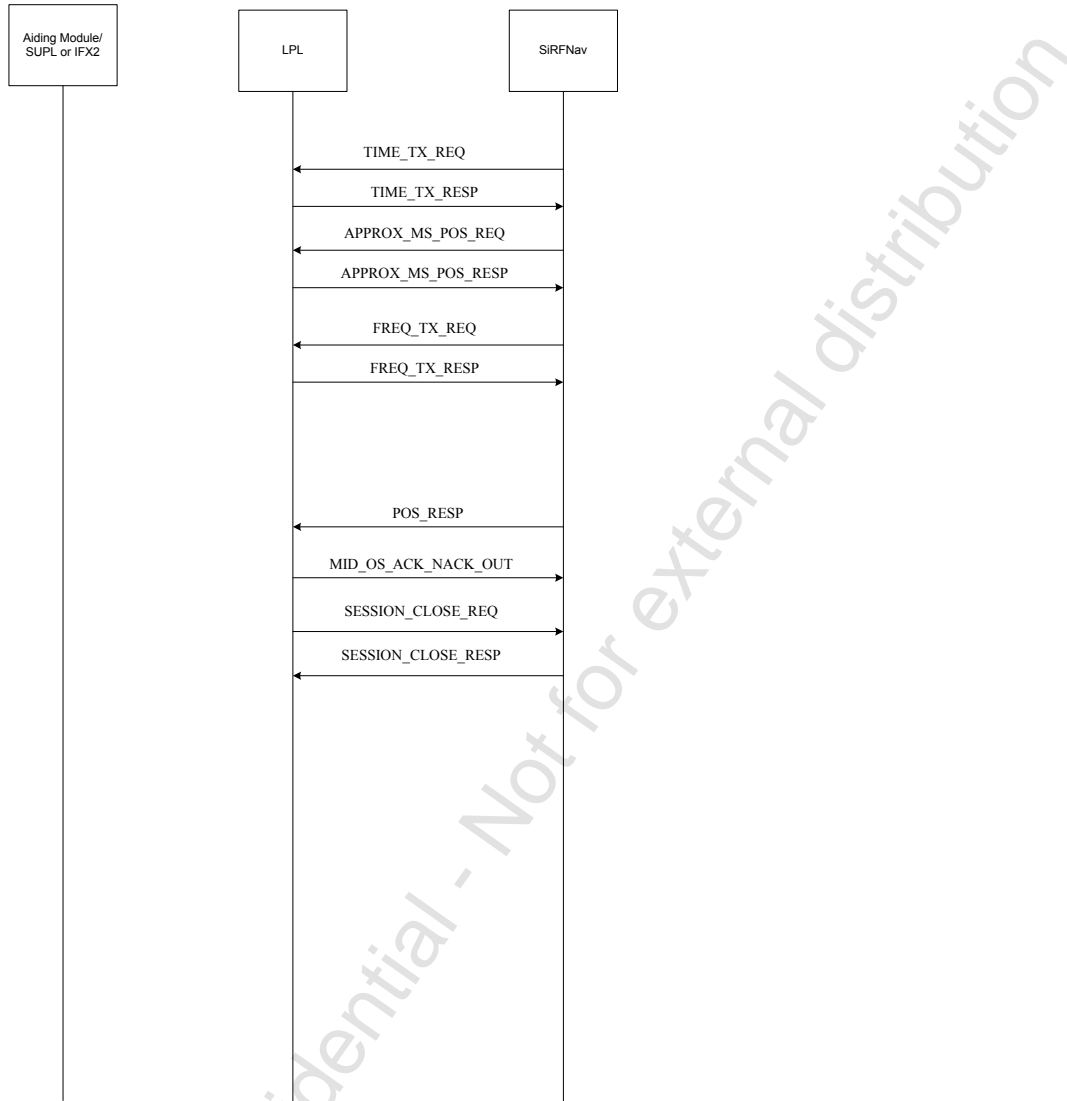


Figure 6. AGPS messaging sequence with response details. Session Part II.

General Error Handling Procedures on SLC side

- Upon receiving any request, if data is not immediately available, the SLC shall respond with a Reject Message with REJ_REASON set to “not ready”. It will send a response message any time, as soon as the data becomes available.
- Upon receiving any request, if data will not be available and will not be available until the next power cycle, the SLC shall send a Reject message with REJ_REASON set “not available”. No other Response shall be sent afterwards.
- Upon receiving a Reject message with REJ_REASON set to “not available”, the SLC shall not expect any response for this request, and shall not request the same information later on.
- Upon receiving a Reject message with REJ_REASON set to “Wrongly formatted message”, and a request of the rejected message is still pending, the SLC shall send the request once again instantly; otherwise the SLC will take no action.



- Upon receiving a Wrongly Formatted Message, the SLC shall send a "Reject" Message with "REJ_REASON" field set to "Wrongly formatted message" (see Glossary for definition of Wrongly Formatted Messages).
- Upon receiving a message with a reserved MESS_ID (see **Error! Reference source not found.**), the SLC shall send an error notification message with ERROR_REASON field set to "MESS_ID not recognized".
- Upon receiving an error notification message with ERROR_REASON field set to "MESS_ID not recognized", the SLC shall silently discard the message.

General Error Handling on CP side

- Upon receiving any request (except HW Configuration Request), if data is not immediately available, the CP shall respond with a Reject Message with REJ_REASON set to "not ready". It will send a response message any time, as soon as the data becomes available.
- Upon receiving any request (except HW configuration Request), if data will not be available and will not be available until the next power cycle, the CP shall send a Reject message with REJ_REASON set "not available". No other Response shall be sent afterwards.
- Upon receiving a Reject message with REJ_REASON set to "not available", the CP shall not expect any response for this request, and shall not Request the same information later on.
- Upon receiving a wrongly formatted query, the CP shall send a Reject message with REJ_REASON set to "Wrongly formatted message".
- Upon receiving a Reject message with REJ_REASON set to "Wrongly formatted message", and a request of the rejected message is still pending, the CP shall send the request once again instantly; otherwise the CP will take no action.
- Upon receiving a message with a reserved MESS_ID (see **Error! Reference source not found.**), the CP shall send an error notification message with ERROR_REASON field set to "MESS_ID not recognized".
- Upon receiving an error notification message with ERROR_REASON field set to "MESS_ID not recognized", the CP shall silently discard the message.

7.1.3 "Reject message" vs. "Error Notification" Messages

There are two methods of error reporting:

- Either a Request cannot be fulfilled, and a "Reject" message is sent instead of the normal Reply message, with an code to identify the reason of the reject; this is a "solicited" error reporting. In this category falls "data not available" or trying to open a session when the session has already been opened.
- Or a condition, not associated to a request arose, and the SLC needs to report the problem to the CP for possible action. The Error Notification message has been introduced specifically for this ; this is an unsolicited error reporting. In this situation falls the incompatibility between Air-Interface revision numbers.

7.1.4 Error handling

The errors can be classified in three categories:

- The ones sent in a Reject Message, informing the requesting entity that the requested action has not been completed and giving the reason for the non completion. This category usually leads to a correction of the problem and repetition of the request by the requesting entity.
- The ones sent in an Error Notification message, informing the other entity that a change in the environment (but not triggered by a Request) occurred, and needs intervention. In this category falls the Air-interface OSP revision number incompatibility.



This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

- The ones reported in an Error Notification message, informing that some error has occurred, but not destined to the other entity. The other entity will silently discard the message (i.e. do nothing), and will continue the processing. Those messages are meant to be captured by any message collection device connected between communicating entities, and meant to inform of a problem during the integration phase. Wrongly formatted messages fall into this category.

7.1.5 Message Time-out Procedures

- When the CP sends a "Reject" message with reason as "Data Not Ready", the SLC shall continuously send the request message every 4 seconds until the response message or the reject message with data not available is received.
- When a response message is not received, the sender of the request message shall re-try the sending of the message up to 3 times, starting after 6 seconds after the initial message, and doubling the time-out value at each retry.

7.2 Power ON/Power OFF

Power ON procedure:

When the CP needs to start a Geolocation Session, it turns ON the SLC's power. After Initialization and self-check, the SLC shall send the hardware config request message, which notifies the CP that the SLC is alive, and the message transfer can start. The Power ON sequence also directs the SLC to immediately start the GPS processing, with whatever aiding information is available at the SLC at that time.

Error Recovery on CP side:

If the hardware config request message is not received within (TBD at design phase on a case by case basis) seconds, the CP shall cycle the SLC's power OFF and ON again. It is to note that CP needs to allow enough time for the SLC to send the hardware config request after power ON (compatible with the TBD value), otherwise, the SLC will never start properly.

Error Recovery on SLC side:

The SLC shall wait (TIME_OUT at design phase on a case by case basis) seconds after outputting the hardware config request for the CP to send the Hardware Configuration Response message. If the Hardware configuration response never arrives at the SLC, then no session is opened and no aiding requests are sent. The SLC positions autonomously in this case.

Power OFF procedure:

To power OFF the SLC, after having sent a "Session Closing Request" with "SESSION_CLOSE_REQ_INFO" set to "Session Closing Requested", the CP shall wait for the "Session Closing Notification" with "SESSION_CLOSE_STATUS" field set to "Session Closed" before turning the power off. The Response message notifies the CP that all context has been saved in non-volatile memory, and that the SLC can be safely turned OFF at any time.

7.3 GPS Soft Reset

Aside from the power cycle, or the hard reset using HW pin, it is possible to reset the GPS function by sending a Reset GPS Command.

GPS Soft Reset Procedure

-When the CP wants to start a GPS session through software messaging only, it shall send a "Reset GPS Command" message and wait for (TBD) seconds to receive the hardware config request message.



This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

- Upon receiving a "Reset GPS Command" message with
- 1)-"RESET TYPE" field set to "Hot Reset", the SLC shall execute a Software Reset without clearing non volatile memory.
 - 2)-"RESET TYPE" field set to "Cold Reset", the SLC shall clear stored ephemeris , RTC Time and stored MS location from non volatile memory and then execute a Software Reset.
 - 3)- "RESET TYPE" field set to "Factory Reset", the SLC shall clear entire non volatile memory and then execute a Software Reset.

In all of the previous cases, the SLC shall flush the message buffers before restart.

Error Handling

- If the CP does not receive a "Hardware Configuration Request" Message within the timeout, the CP shall cycle the power.

7.4 Advanced Power Management (APM)

As described in the message specification sections above, the SiRFstarIV power management also includes a Micropower Management (MPM) mode. This is a more advanced, improved version of the SiRFStarIII power management solution, the flow of which is summarized in this section, below.


The advanced Power Management is a sophisticated power control method applied between successive fixes, and between fixes requirements. It makes the assumption that the CP keeps the "Power ON" all the time on the SLC subassembly. After the CP enables it, it is under SLC's control. The CP turns the APM mode "ON", by sending the "Set APM" message; the CP verifies that the command has been executed by checking the APM_STATE field in the "Ack APM" message. In the simplest manner, the SLC can be put to Hibernate mode immediately by the following procedure:

1. An OSP session is open (i.e. Session Open Request/Notification have been exchanged)
 2. The CP sends "Set APM" with APM_ENABLE to be "ON" (other parameters are "don't cares", and can be set to POWER_DUTY_CYCLE=1 and TIME_DUTY_PRIORITY=1, for example), and the CP receives "Ack APM"
 3. The CP sends "Session Close Request", and receives "Session Close Notification".
- After step 3, the SLC is in hibernate mode.

Alternatively, the APM can be turned "ON", either with priority to power reduction (the SLC shall try to keep the power duty cycle lower or equal to the prescribed value in the "POWER_DUTY_CYCLE" field, possibly by slowing down the fix update rate), or to performance (the SLC shall try to keep up with the periodicity between fixes, possibly by increasing the power consumption) using the "TIME_DUTY_PRIORITY" field.

APM enable procedure

- The CP shall send a "Set APM" message with APM_ENABLE field set to "1", POWER_DUTY_CYCLE field set to the desired power consumption (from 1 for 5% , to 20 for 100% of the total power), and TIME_DUTY_PRIORITY field set to "1" for priority to the performance and to "2" for priority for power reduction.
- The SLC shall send an "Ack APM" message with APM_STATE set to "1".

 <p>SiRF A CSR plc Company</p>	One Socket Protocol ICD <div style="border: 2px solid red; padding: 5px; display: inline-block; color: red; font-weight: bold;">This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control.</div> Revision 5.5 11/16/2009
---	--

APM disable Procedure

- The CP shall send a "Set APM message with APM_ENABLE field set to "0". The others fields (POWER_DUTY_CYCLE and TIME_DUTY_PRIORITY) are not relevant.
- The SLC shall send an "Ack APM" message with APM_STATE set to "0".

Error handling

Fields out of range in the Set APM message:

- the SLC shall send a "Reject" message with REJ_REASON set to "Wrongly formatted message".

No APM available on this hardware platform

- The SLC has no means to find out if the hardware platform is "APM enabled". Upon reception of a "Set APM" message, the SLC shall return an "Ack APM" message with the APM_STATE field set to the APM_ENABLE field value in the "Set APM" message. However, the expected power reduction will not be achieved.

APM mode "ON", but no position can be computed

- If the SLC goes through the whole search domain without finding satellites or being able to compute a position, the SLC shall send a "no position" result message on the Air-Interface (Air-interface protocol-dependent, and only if this capability is defined). The SLC shall also send a "SLC Status" message on the F interface with STATUS field set to "no fix available after full search".

- Upon reception of this message, in order to save power, the CP may, either change the APM configuration, or shut down the SLC altogether.

CP wants to change the APM mode with APM already enabled

- Please see details in the APM document.

7.5 Hardware Configuration

As soon as the SLC is up and running it shall send a hardware config request message. The CP sends the hardware configuration response so that the software will know what the capabilities from the CP are, and won't try to access capabilities that are not present. It will also allow the dynamic change of the HW capabilities from one power cycle to another one.

The hardware config request needs to be the first messages sent from the host. In a tracker product, the hardware config request should be sent at part of the SiRFNav Start/Stop messages (see product's MEI documentation for details). When the product is a PVT, the hardware config request message is still sent from the SLC and should be ignored (i.e. no response sent). Without a hardware config response message received, the OSP will be backwards compatible to SSIH GSW and thus the SLC will operate autonomously.

In this category, there are:

1) Time transfer capabilities

The time can be sent by CP to SLC as a H/W signal time tagging a particular event, followed by a "Time Transfer Response" message, indicating what was the time of the H/W event. This is the "Precise Time Transfer" Mode.

If no H/W time transfer interface is present, the time can still be transmitted with a lower accuracy as an isolated "Time Transfer Response" message. This is the "Coarse Time Transfer" mode.

Whether some time transfer capability is present, and which one if any, is found in the "Hardware Configuration Response" Message. Please note that "Precise Time Transfer" and "Coarse Time Transfer" are exclusive of each other.

CS-129291-DC2	© SiRF Technology, Inc., a member of the CSR plc group of companies 2009 This material is subject to SiRF's non-disclosure agreement.	Page 240 of 251
---------------	--	-----------------



This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

2) Frequency Transfer Capabilities

The Frequency can be either referred to the SLC clock or to the reference clock input to the counter. The HW_Config shall indicate whether the frequency transfer is counter method or not. Also the frequency transfer response now has a bit which identifies the relation of each frequency transfer message to either SLC clock or the reference clock to the counter. Whether some Frequency transfer capability is present, and which one if any, is found in the "HW_CONFIG" field of the "Hardware Configuration Response" Message. Please note that all Frequency transfer methods are exclusive of each other.

3)-Nominal Frequency aiding

If a "Counter" type frequency transfer is implemented, HW_CONFIG shall indicate whether the reference clock input to the counter is on or not. SLC shall NEVER read the counter when the reference clock is off. The "NOMINAL_FREQ" field in the "Hardware Configuration Response" Message gives the exact frequency (derived from the CP clock) applied to the counter input. This is necessary to determine the relative frequency error between CP clock and SLC clock from the absolute frequency difference measurement.

Procedure

- At the Power ON, the SLC shall send a hardware config request message.
- Upon receipt of the hardware config request the CP shall send a "Hardware Configuration Response" message describing the implemented hardware capabilities.
- Upon receiving a "Hardware Configuration Response" message, the SLC shall store the hardware capabilities only for the duration of the current power cycle. The subsequent request messages issued by the SLC will depend on HW configuration message. Most notably, time and frequency transfer requests will be issued depending on the contents of the HW configuration message.

Error recovery

- Check the Power ON/Power OFF error recovery section.

7.6 Serial Port management

Depending on the hardware configuration, the SLC has one or two serial ports available for communication. The ports are named "Port A", "Port B", up to the number of ports available.

- Only port A is available for all SiRFLoc communications.
- Port B is reserved for SiRF internal usage (NOTE – I don't think this is true?).
- The baud rate settings for port A or port B can be changed through the "Serial Port Settings Request/Response" pair, sent over port A only.
- The baud rate settings shall be stored in non-volatile memory.

Procedure for baud-rate change ON "port A" FROM port A:

Normal procedure

- CP sends a "Serial Port Settings Request" message with PORT field set to "0", and BAUD_RATE field set to the "new" baud rate on port A. The message is transmitted at the "old" baud rate port A. It is the last message the CP shall transmit at the "old" baud rate on port A.
- Upon reception, the SLC shall flush the message buffer and then acknowledge by sending a "Serial Port Settings Response" message with PORT field set to '0', BAUD_RATE field set to the "new" baud rate, and ACK_NUMBER field set to '1'. This message is transmitted at the



- “old” baud rate on port A. It is the last message sent at the “old” baud rate on the port A. Then the SLC waits one second during which it will transmit no message and accept no message.
- Upon reception of the first “Serial Port Setting Response” message, and within one second after reception, the CP will change the baud-rate settings on its Port. It shall transmit no message, but shall accept incoming messages at the “new” baud rate.
 - After the one second delay, the SLC shall send a second “Serial Port Setting Response” message with PORT field set to ‘0’, BAUD_RATE field set to the “new” baud-rate, and ACK_NUMBER set to ‘2’, as an acknowledgement the baud rate has been effectively changed. This message shall be transmitted at the “new” baud rate on port A.
 - Upon reception of the second “Serial Port Setting Response” message with ACK_NUMBER set to ‘2’, CP shall resume the normal exchanges using port A at the “new” baud rate.

Error handling:

- 1) If the CP does not receive “Serial Port Setting Response” message with ACK_NUMBER set to ‘1’ within 15 seconds after having sent “Serial Port Setting Request” message, the CP shall “hard reset” the SLC by HW pin, or “power cycle”.
- 2) If CP does not receive “Serial Port Setting Response” message with ACK_NUMBER set to ‘2’ within 2 seconds from the first “Serial Setting Response” message with ACK_NUMBER set to ‘1’, the CP shall “hard reset” the SLC by HW pin, or power cycle. Then it shall try to communicate at “new” and then “old” baud rate.

Procedure for baud-rate change ON “port B” FROM “port A”:

Normal procedure

- CP flushes the buffer for the outgoing messages on port B, so no more messages shall be transmitted on port B. CP sends a “Serial Port Settings Request” message with PORT field set to “1”, and BAUD_RATE field set to the “new” baud rate on port B. The message is transmitted on port A at the baud rate in use on port A at that time.
- SLC flushes the message buffer on port B and then acknowledges by sending a “Serial Port Settings Response” message with PORT field set to ‘1’, BAUD_RATE field set to the “new” baud rate, and ACK_NUMBER field set to ‘1’. This message is transmitted on port A, at the baud rate in use on port A at that time.
- Then the SLC waits one second during which it will transmit no message and accept no message on port B. The message traffic on port A is unaffected, though.
- After the one second delay, the SLC shall send a second “Serial Port Settings Response” message with PORT field set to ‘1’, BAUD_RATE field set to the “new” baud-rate, and ACK_NUMBER set to ‘2’, as an acknowledgement the baud rate has been effectively changed. This message shall be transmitted on port A, at the baud rate in use on port A at that time.
- Upon reception of the second “Serial Port Setting Response” message with ACK_NUMBER set to ‘2’, CP shall resume the normal exchanges on port B, at the “new” baud rate.

Error handling:

- 1) If CP does not receive “Serial Port Settings Response” message with ACK_NUMBER set to ‘1’ within 15 seconds after having sent “Serial Port Settings Request” message, the CP shall “hard reset” the SLC by HW pin, or “power cycle”.
- 2) If CP does not receive “Serial Port Settings Response” message with ACK_NUMBER set to ‘2’ within 2 seconds from the first “Serial Settings Response” message with ACK_NUMBER set to ‘1’, the CP shall “hard reset” the SLC by HW pin, or power cycle.



7.7 Session Opening/Session Closing

After the SLC responded to an incoming HW_CONFIG_REQ message, it is ready to receive a "Session Opening Request" message. The latter message notifies the SLC that the connection with the SLS has been established and that air-interface messages can be exchanged. The SESSION_OPEN_REQ_INFO in the message allows the SLC to determine what "Geolocation Air-Interface protocol" to activate to dialog with the SLS. This allows the use of multi-mode MS's. A multi-mode MS supports several Geolocation air-interfaces which are determined at the opening of the Geolocation session.

The special case of "request for standalone solution" means that the position request actually comes from MS user whether the user is out of the cell phone coverage area.

The special case of "request without air-interface" means that the position request actually comes locally from the MS user but the cell phone can not obtain an air-interface connection, therefore no Geolocation aiding will be available from a remote SLS. The SLC will use all information available except Geolocation messages. The implicit aiding (time transfer, frequency transfer, approximate MS position) might be available, if the MS is in a wireless coverage area, and if the air-interface has the capability to provide the information. The Position Result will be obviously available only locally, and will be returned by a "Position Results" message to the CP (for local display to the MS user).

The "Session Closing Request" message with "SESSION_CLOSE_REQ_INFO" set to "Session Closed Requested" notifies the SLC that the Geolocation air-interface connection has been permanently broken. The SLC shall stop to send "Air-Interface" messages.

Session Opening procedure

When the CP is informed that an air-interface connection has been opened with the SLS or it has received an air-interface message from the SLS, it shall send a "Session Opening Request" message to the SLC, with the "SESSION_OPEN_REQ_INFO" field set to the appropriate air-interface identification.

Upon receiving a "Session Opening Request" message:

- If the SLC can open the session, it shall send a "Session Opening Notification" message with the "SESSION_OPEN_STATUS" field set to "Session Opening Succeeded". The SLC shall immediately start the "Air-Interface" protocol and messages process.
- If the SLC cannot open the session, it shall send a "Session Opening Notification" message with the "SESSION_OPEN_STATUS" field set to "Session Opening Failed".
- If the SLC cannot open the session within the timeout, it shall send a "Reject" message with "REJ_REASON" set to "Not ready".

Session Opening Error Handling

Upon receiving a Session Opening Request with SESSION_OPEN_REQ_INFO set to a valid opening mode, when the session is already open, the SLC shall send a Session Opening Notification message with SESSION_OPEN_STATUS set to "Session Opening Failed".

Upon receiving a "Session Opening Notification" message with "SESSION_OPEN_STATUS" field set to "Session Opening Failed", the CP shall retry a "Session Opening Request" for at most three times, before declaring SLC failure.

Session Closing Procedure

 <p>SiRF A CSR plc Company</p>	One Socket Protocol ICD <div style="border: 2px solid red; padding: 5px; display: inline-block; color: red; font-weight: bold;">This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control.</div> Revision 5.5 11/16/2009
---	--

When the CP is informed that the air-interface connection has been permanently closed, it shall send a "Session Closing Request" message, with the "SESSION_CLOSE_REQ_INFO" field set to "Session Closing Requested".

Upon receiving a "Session Closing Request" message:

- If the "SESSION_CLOSE_REQ_INFO" field is set to "Session Closing Requested", the SLC shall stop sending any air-interface message, and shall close the air-interface process. It shall store all information necessary to keep from session to session in the local non-volatile memory.

If this action is safely done within the timeout period, the SLC shall send a "Session Closing Notification" Message with "SESSION_CLOSE_STATUS" field set to "Session Closed".

If it is not done within the timeout, the SLC shall send a "Reject" message with "REJ_REASON" field set to "Not Ready".

Session Closing Error Handling

Upon receiving a Session Closing Request with SESSION_CLOSE_REQ_INFO set to "Session Closing requested", when no session is open, the SLC shall send a Session Closing Notification with SESSION_CLOSE_STATUS set to "Session closing failed".

7.8 Session Suspend/Session Resume

The CP might know about a transitory situation (like hand-over) where the air-interface connection is temporarily broken. The CP shall notify the SLC of such an occurrence by sending a special "Session Closing Request" message with "SESSION_CLOSE_REQ_INFO" field set to "Session Suspend Requested". Upon receiving such a message, the SLC will "freeze" the "geolocation air-interface protocol" (meaning that all timeout counters will be stopped).

When the CP knows about the reconnection, it shall send a special "Session Opening Request" with "SESSION_CLOSE_REQ_INFO" field set to "Session Resume Requested". Upon receiving such a message, the SLC will restart the "Geolocation Air-Interface protocol" where it left it after receiving the "Session Closing Request" Message with "Suspend" bit set.

Suspend Procedure

When the CP has been informed that an air-interface connection with the SLS has been temporarily closed, it shall send a "Session Closing Request" message with "SESSION_CLOSE_REQ_INFO" field set to "Session Suspend Requested".

Note: In parallel with notifying the CP, we assume that the network will have sent a similar "suspend" notification to the MAS that will suspend air-interface activity in the SLS in a similar way.

Upon receiving a "Session Closing Request" message with "SESSION_CLOSE_REQ_INFO" field set to "Session Suspend Requested", the SLC shall "freeze" the air-interface process activity. In particular the timeout counters will be "frozen" at their current values. It shall send back a "Session Closing Notification" message with "SESSION_CLOSE_STATUS" field set to "Session Suspended". If the air-interface was already in a suspend state, the SLC shall still send a "Session Closing Notification" message with "SESSION_CLOSE_STATUS" set to "Session Suspended".

CS-129291-DC2	© SiRF Technology, Inc., a member of the CSR plc group of companies 2009 This material is subject to SiRF's non-disclosure agreement.	Page 244 of 251
---------------	--	-----------------



Error Handling

Upon receiving a Session Closing Request with SESSION_CLOSE_REQ_INFO set to "session Suspend requested", when no session is open, the SLC shall send a Session Closing notification with SESSION_CLOSE_STATUS set to "Session suspend failed".

Resume Procedure

When the CP has been informed that an air-interface connection with the SLS has been reestablished, it shall send a "Session Opening Request" message with "SESSION_OPEN_REQ_INFO" field set to "Session Resume Request".

Note: In parallel with notifying the CP, we assume that the network will have sent a similar "Resume" notification to the MAS which will resume air-interface activity in the SLS in a similar way.

Upon receiving a "Session Opening Request" message with "SESSION_OPEN_REQ_INFO" field set to "Session Resume Request", the SLC shall "unfreeze" the air-interface process activity. In particular the timeout counters will be "reactivated". The SLC shall send a "Session Opening Notification" with the "SESSION_OPEN_STATUS" field set to "Session Resume Succeeded". If the air-interface was not in a suspend state, the SLC shall still send a normal "Session Opening Notification", with the "SESSION_OPEN_STATUS" field set to "Session Resume Succeeded".

7.9 Approximate MS Position Management

To speed up the position computation, The SLC can request from the network its approximate position by the "Approximate MS Position Request/Response" message pair.

The normal procedure is as follows:

- The SLC sends an "Approximate MS Position Request" message.
- The CP sends an "Approximate MS Position Response" message with the LAT, LON, ALT fields set to the best estimate of the MS location, and "EST_HOR_ERR" field set to the maximum radius of the position uncertainty around the given position.

Error handling:

- If the CP does not have the information available (and will not get it even later), it shall send a "Reject" message, with the "REJ_REASON" field set to "Not Available".
- If the CP has no information ready (BUT could get the information eventually), it shall send a "Reject" message, with the "REJ_REASON" field set to "Not Ready"; if the information becomes available later, the CP shall immediately send an "Approximate MS Position Response" message, without waiting for a new request from the SLC.

7.10 Time Transfer

If some form of time transfer is available (as specified by the "Hardware Configuration Message"), the SLC may send "Time Transfer Request" Message. If the CP has access to the time, and depending on the HW_CONFIG word, it will:

- Either send a H/W pulse, then a "Time Transfer Response" Message in case the "Precise Time Transfer" mode has been activated.

 <p>SiRF A CSR plc Company</p>	One Socket Protocol ICD <div style="border: 2px solid red; padding: 5px; display: inline-block; color: red; font-weight: bold;">This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control.</div> Revision 5.5 11/16/2009
---	--

- Send a “Time Transfer Response” Message in case the “Coarse Time Transfer” mode has been activated
- Send a Reject message.

All of these options must occur within a predetermined timeout period (defined at design time).

To assist in situations which could arise during the integration period, but should not occur in normal operation several special cases of “Reject” message have been added for situations where:

- 1) The Hardware Configuration Response has both bits “Precise Time Transfer” and “Coarse Time Transfer” asserted.
- 2) When a “Precise Time Transfer” mode has been declared in the “Hardware Configuration Response”, a “Time Transfer Response” message is received with TT_TYPE field to all '0's (i.e. of “Coarse” type).
- 3) Conversely, whereas a “Coarse Time Transfer” mode has been declared in the “Hardware Configuration Response”, a “Time Transfer Response” message is received with TT_TYPE field to all '1's (i.e. of “Precise” type).

In all preceding cases, the SLC shall send a “REJECT” message with REJ_REASON field set to “Wrongly formatted message”.

Time transfer Procedure

Upon receiving a “Time transfer Request” Message:

- 1) If the CP is capable of generating a time pulse (as described in “Hardware Configuration” information), it shall send the time pulse within the timeout from the request message, then the “Time Transfer Response” message, within the timeout counted from the time pulse rising edge. The TT_TYPE field shall be set to “Precise Time Transfer”. The “times” field in the “Time Transfer Response” message shall be set to the GPS time of the rising edge of the pulse; the “accuracy” field shall be set to the appropriate value according to the origin of the time information.
- 2) If the CP is not capable of generating a time pulse (as described in “Hardware Configuration” information), it shall send a “Time Transfer Response” message, within the timeout counted from the reception of the Request message. The TT_TYPE field shall be set to “Coarse Time Transfer”. The “times” field in the “Time Transfer Response” message shall be set to the approximate GPS time at the time of message transmission; the “accuracy” field shall be set to the appropriate value according to the origin of the time information.

Error Handling

- If the CP either is not capable of giving time, or is not currently ready to give time, the CP shall send a “Reject” Message.
- If the time will not be accessible at all, the CP shall set the “REJ_REASON” field to “Not available”.
- If the CP was not able to provide the information within the timeout, BUT it can eventually provide the information after a sufficient delay, the CP shall set the “REJ_REASON” field to “Not ready” bit.
- Upon receiving a “Time Transfer Response” Message in a “Precise Time Transfer” mode without receiving first a hardware time pulse, or receiving it before the message, the SLC shall send a “Reject” message with “REJ_REASON” field set to “No Time Pulse during Precise Time Transfer”.

CS-129291-DC2	© SiRF Technology, Inc., a member of the CSR plc group of companies 2009 This material is subject to SiRF's non-disclosure agreement.	Page 246 of 251
---------------	--	-----------------



This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

7.11 Frequency Transfer

If some form of frequency transfer is available (see “Hardware Configuration”), the SLC shall send “Frequency Transfer Request” Message to start frequency transfer.

If the information is available at the CP, the SLC may either require it once, or periodically from the CP. The periodicity depends on the quality of the CP clock, and will be determined at design time in agreement with SiRF technical team to ensure that the total frequency budget error stays within the limits. This frequency error refers to the error on the CP clock provided to the SLC. Each frequency error measurement from CP will be time tagged or set to FFFFFFFE if time tagging is not available. The relative frequency difference between CP and SLC is directly measured by SLC, or is “zero” in the case where the frequency transfer is referred to the SLC clock. It is important that the time transfer shall occur before the frequency transfer if time tagging is used.

Note 1: Applicable to the frequency counter method only: The SLC internal frequency measurement hardware is designed to measure the frequency of a clock signal derived from the CP clock, NOT the CP clock itself. The CP crystal clock frequency can be between 7MHz and 40MHz. To measure the relative frequency error between CP clock and SLC clock, the SLC needs to know the exact frequency it should receive on its internal frequency input when the CP clock is exactly at its nominal frequency. This nominal frequency value is found in the “NOMINAL_FREQ” field of the “Hardware Configuration Response” Message or the “NOMINAL_FREQ” field of the “Frequency Transfer Response” message.

Note 2: There are multiple situations to transfer CP frequency error from CP to SLC. Each one of them uses the SCALED_FREQ_OFFSET, REL_FREQ_ACC and TIME_TAG fields differently. Please refer to the technical application note on frequency transfer for specifics on how to fill out those fields appropriately.

Note 3: applicable to the frequency counter method only: SLC shall read the counter only when the reference clock is on and NEVER read the counter when the reference clock is off. Bit 8 of HW_CONFIG field in “Hardware Configuration Response” message and Bit2 of REF_CLOCK_INFO field in “Frequency Transfer Response” message indicate whether the reference clock input to the counter is on or off.

Single frequency transfer procedure

- The SLC shall send a “Frequency Transfer Request” Message to CP with Bit 1 in “FREQ_REQ_INFO” field set to “single request” or to “multiple request”.
- The CP shall reply a single “Frequency Transfer Response” message, with SCALED_FREQ_OFFSET field set to the CP relative frequency difference multiplied by 1575.42MHz, in Hz, and REL_FREQ_ACC in ppm. If the frequency measurements are not reliable then the CP shall set this to 0xFF.
- The CP shall set the TIME_TAG field if time is available, else it will need to set this field to 0xFFFFFFFF to indicate that time transfer is not available
- The CP shall indicate in the CLOCK_REF of the “frequency transfer response” the relation between this frequency transfer message and the clock used. If the message is related to the SLC clock then Bit1 = 1 and if the message is related to the CP clock then Bit1 = 0

Multiple frequency transfers turn ON procedure

- By default, SLC always request multiple frequency transfers. But the actually mode (single vs. multiple) shall be decided with the handset design team.



This document becomes an **UNCONTROLLED COPY** once printed from SiRF's Intranet. To receive a controlled copy, please contact **Document Control**.

Revision 5.5
11/16/2009

- It is expected that in the multiple frequency transfer case, precise time transfer precedes the frequency transfer. Otherwise the CP shall set the TIME_TAG field of the “Frequency Transfer Response” message to either 0xFFFFFFFFE or 0xFFFFFFFFF.
- The SLC shall send a “Frequency Transfer Request” Message to CP with Bit 1 in “FREQ_REQ_INFO” field set to “multiple request”, and Bit 2 set to “ON”
- If the frequency error is known, the CP shall periodically send a “Frequency Transfer Response” message, with the “SCALED_FREQ_OFFSET” field set to the frequency CP clock error between nominal and real value, in Hz scaled to GPS-L1 frequency. The periodicity of the message depends on the CP clock stability, and shall be determined at design time.
- Each of the frequency transfer message shall have a TIME_TAG field. The CP is responsible to time tag the frequency error measurements in terms of seconds elapsed since the beginning of the current GPS week. The SLC will be responsible for the rollover of the GPS_WEEK_NUM
- Each of the frequency transfer message shall also indicate in the REF_CLOCK_INFO the relation of this frequency transfer message and its relation to the clock. Bit1 = 1 implies that the message is related to the SLC clock and Bit1 = 0 implies that the message is related to the CP clock
- In APM, when the SLC is in full power mode and the reference clock input to the counter is on, the CP shall send “Frequency Transfer Response” message to restart the frequency transfer.

Reference clock turn OFF procedure (applicable to the frequency counter method only)

- If the CP wants to turn off the reference clock, the CP shall send a “Frequency Transfer Response” message with Bit 3 of REF_CLOCK_INFO field is ‘1’
- Upon receiving the “Frequency Transfer Response” message, the SLC shall stop reading frequency counter and send a “Frequency Transfer Request” message to allow turn off reference clock (Bit 3 of FREQ_REQ_INFO = 1). The SLC shall ALWAYS permit the CP to turn off the reference clock.
- The CP can turn off reference clock only if a “Frequency Transfer Request” message with Bit 3 of FREQ_REQ_INFO = 1 is received. When the reference clock is turned off, CP shall not send “Frequency Transfer Response” message anymore.

Reference clock turn ON procedure (applicable to the frequency counter method only)

The CP can turn on the reference clock at any time except when the SLC is in sleep mode and then send “Frequency Transfer Response” messages with Bit 2 of REF_CLOCK_INFO field is ‘0’.

Change reference clock procedure (applicable to the frequency counter method only)

- The CP shall send a “Frequency Transfer Response” message with Bit 3 of REF_CLOCK_INFO field is ‘1’, which informs the SLC that the CP wants to turn off the reference clock.
- Upon receiving the “Frequency Transfer Response” message, the SLC shall stop reading frequency counter and send a “Frequency Transfer Request” message to allow turn off reference clock (Bit 3 of FREQ_REQ_INFO = 1).
- Upon receiving the “Frequency Transfer Request” message, the CP turns off reference clock.
- The CP then switches to another reference clock and shall send a “Frequency Transfer Response” message with FREQ_REQ_INFO set to

Bit 2 = 0: reference clock is on

Bit 4 = 1: NOMINAL_FREQ field is presented



and NOMINAL_FREQ field contains nominal frequency, which can be between 7 MHz to 40 MHz.

Multiple frequency transfers turn off procedure

Depending on the application, the SLC may send a request to disable the periodic frequency transfer. To disable the periodic frequency transfer from SLC, it shall send a "Frequency Transfer Request" Message to CP with Bit 1 in "FREQ_REQ_INFO" field set to "multiple request", and Bit 2 set to "OFF" the CP shall stop to send the periodic "Frequency Transfer Response" message.

General Error Handling

- If the frequency difference between Base Station master clock and CP clock is not known (and will not be known any time), the CP shall send a "Request Rejected" message with "REJ_REASON" field set to "Not available"
- If the frequency difference between Base Station master clock and CP clock is not known (and but can be known eventually), the CP shall send a "Reject" message with "REJ_REASON" field set to "Not Ready".

7.12 Interoperability between different Air-Interface ICD revision numbers

It can happen that a SLS and SLC with incompatible Air-Interface Revision numbers are put into communication. The way the Air-Interface is build, after SLS and SLC identify the problem by a simple message exchange common to all rev numbers, the Air-Interface message shall be stopped.

In such a case, the SLC must report back to the CP the problem, in order for the CP to take the appropriate action, which is to close the Air-Interface. An Error Notification message has been added to that effect.

Air Interface Revision Incompatibility Reporting Procedure

Upon detecting incompatibility between Air-Interface revision numbers, the SLC shall send an error notification message with the ERROR_REASON field set to "SLC does not support SLS's Air-Interface revision number". Upon receiving an error notification message with the ERROR_REASON field set to "SLC does not support SLS's Air-Interface revision number" (signaling the end of all message exchange over the air), the CP shall close the Air-Interface session.

7.13 Software Version ID

The CP can query the SLC to determine the software version ID that is currently being used. In such instances, the request/response format shall be as outlined in the Software Version Request/Response message descriptions.

A value of zero in the LENGTH_SIRF_VERSION_ID and/or LENGTH_CUSTOMER_VERSION_ID field is valid and indicates that there is no corresponding version name.

Error handling

Fields out of range in the Software Version message:

If the LENGTH_SIRF_VERSION_ID field and/or the LENGTH_CUSTOMER_VERSION_ID field in the Software Version Response has values outside the range of 0-80, then this value and corresponding SIRF_VERSION_ID and/or CUSTOMER_VERSION_ID shall be ignored. Fields do not match in the

 <p>SiRF A CSR plc Company</p>	<p style="text-align: right;">One Socket Protocol ICD</p> <div style="border: 2px solid red; padding: 5px; text-align: center; color: red; font-weight: bold; font-size: small;">This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control.</div> <p style="text-align: right;">Revision 5.5 11/16/2009</p>
---	--

Software Version message:

The LENGTH_SIRF_VERSION_ID field and/or the LENGTH_CUSTOMER_VERSION_ID field in the Software Version Response do not match the number of characters in the corresponding SIRF_VERSION_ID and/or CUSTOMER_VERSION_ID. In this case this value and corresponding SIRF_VERSION_ID and/or CUSTOMER_VERSION_ID shall be ignored.

7.14 Configuration Option Selection Storage Control

7.14.1 Levels of Configuration Option Selection Value Storage

Configuration option selection values can be stored at several different levels, depending on the product and on the configuration option setting. But in general, the following levels can be applied for specifying configuration options:

- a) Hardcoded in the receiver software at software build time
- b) Defined in the eFUSE configuration storage at the end of the manufacturing process
- c) Defined in the eFUSE Software Configuration Register, overriding the value provided in the eFUSE configuration storage
- d) Stored in BBRAM
- e) Stored in SRAM based on settings requested some of the OSP messages.

The next section below describes for the latter configuration setting OSP messages, how to apply the scope and the rules of overriding the configuration selection values already set in the receiver.

7.14.2 Scope and Rules of Configuration Option Storage Control

The scope and rules of the configuration option storage control can be summarized as follows:

- a) The setting specified and requested in a OSP configuration option setting message will override any previous setting of this value, whether that setting was from default value in the software, an eFUSE setting, or from previous copy of this message.
 - a. If the setting is controlled by eFUSE settings, this message will override the eFUSE setting.
 - i. If the eFUSE setting is mirrored in the eFUSE SW Coonfiguration Register, the contents of this message will be set in the eFUSE SW Coonfiguration Register.
 - b. If the storage control setting is saved in BBRAM, the contents of OSP configuration option setting message will be used to update the BBRAM.
 - c. If neither eFUSE SW Coonfiguration Register nor BBRAM are used in a specific system, the setting will be saved in SRAM.

 <p>SiRF A CSR plc Company</p>	<p style="text-align: right;">One Socket Protocol ICD</p> <div style="border: 2px solid red; padding: 5px; text-align: center; color: red; font-weight: bold; font-size: small;">This document becomes an UNCONTROLLED COPY once printed from SiRF's Intranet. To receive a controlled copy, please contact Document Control.</div> <p style="text-align: right;">Revision 5.5 11/16/2009</p>
---	--

- b) The setting in OSP configuration option setting message will remain valid as long as the specific storage method remains valid.
 - a. For BBRAM, it will persist over resets as long as a factory reset does not reinitialize BBRAM, and as long as backup power is retained for the BBRAM
 - b. For eFUSE SW Configuration Register, it will persist over resets as long as a factory reset does not reinitialize eFUSE SW Configuration Register, and as long as backup power is retained for the eFUSE SW Configuration Register
 - c. For settings saved in SRAM, the setting will persist only until a reset occurs.

7.14.3 Configuration Option Setting Messages in OSP

Different product can support a different portfolio of OSP configuration option setting messages. However, all of them are specified in the OSP ICD and they comprise the following OSP messages:

- A. The SW Toolbox tracker configuration message, described in section 5.41
- B. Switching between binary OSP and NMEA messaging modes, described for message ID 129
- C. Setting message output rates as described for message ID 129 and 166
- D. Setting EE storage options as described for message ID 232
- E. Enabling/disabling DGPS for SBAS control as described for message 133
- F. Selecting mode control parameters for enabling/disabling track smoothing, DR time-out values for report propagation while no-fix outage, etc. as describe for message ID 136
- G. Enabling/disabling extended ephemeris support as described for message ID 232
- H. Setting power mode management options as described for message ID 218